



LED Highbay

100HB/LED/740/ND WB DL BB 2/1

Philips LED high bay lamps are a direct replacement for 250W to 400W metal halide lamps which will deliver substantial energy savings. Philips LED HighBays delivers bright, clean light for a fraction of the energy used by conventional HID.

Product data

General Information			
Cap-Base	EX39 [Exclusionary Mogul Screw]		
Nominal lifetime	50,000 hour(s)		
Switching Cycle	50,000		
Lighting Technology	LED		
EU RoHS compliant	Yes		
Light Technical			
Color Code	740 [CCT of 4000K]		
Beam Angle (Nom)	130 degree(s)		
Luminous Flux	12,000 lm		
Color Designation	Cool White (CW)		
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	120.00 lm/W		
Color Consistency	<6		
Color rendering index (CRI)	70		
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and Electrical			
Line Frequency	50 to 60 Hz		
Input Frequency	50 to 60 Hz		
Power Consumption	100 W		
Lamp Current (Nom)	850 mA		
Wattage Equivalent	250 W		

Starting Time (Nom)	0.5 s		
Warm-up time to 60% light	0.5 s		
Power Factor (Fraction)	0.9		
Voltage (Nom)	120-277 V		
UL Type	Type B - bypass the ballast		
Temperature			
T-Case Maximum (Nom)	158 °F		
Controls and Dimming			
Dimmable	No		
Mechanical and Housing			
Bulb Shape	Others		
Approval and Application			
Energy Consumption kWh/1000 h	- kWh		
Energy Certifications	DLC Standard		
Product Data			
Order product name	100HB/LED/740/ND WB DL BB 2/1		
Full product name	100HB/LED/740/ND WB DL BB 2/1		
Order code	478008		
Material Nr. (12NC)	929001851404		


Datasheet, 2023, November 12 data subject to change

LED Highbay

Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677478001
Numerator - Packs per outer box	2


5004007/4/3000	EAN/UPC - Case	50046677478006
----------------	----------------	----------------

Dimensional drawing



Product	D	С
100HB/LED/740/ND WB DL BB 2/1	8-5/16 inch	9-15/16 inch


Photometric data





Light Distribution Diagram - 100HB/LED/740/ND WB DL BB 2/1


General uniform lighting - 100HB/LED/740/ND WB DL BB 2/1




Spectral Power Distribution Colour - 100HB/LED/740/ND WB DL BB 2/1

LED Highbay

Lifetime

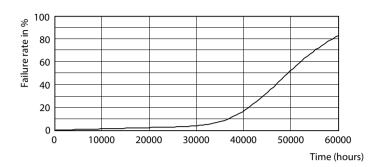

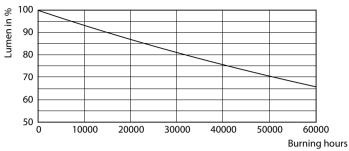

Life Expectancy Diagram - 100HB/LED/740/ND WB DL BB 2/1

Lumen Maintenance Diagram - 100HB/LED/740/ND WB DL BB 2/1

