



BR/R LED

7.2BR30/PER/922-27/P/E26/WG 6/1FB

Philips Dimmable LED Reflector Lamps provide a soft, diffused level of light and smooth dimming to reduce glare. The sleek, lightweight design is ideal for downlighting.


Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	7.2-65W
Light Technical	
Color Code	922-927 [CCT of 2200K-2700K]
Beam Angle (Nom)	90 °
Initial lumen (Nom)	650 lm
Luminous Flux (Rated) (Nom)	650 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2200-2700 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	7.2 W
Lamp Current (Nom)	85 mA
Wattage Equivalent	65 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	75 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted (FR)
Product Data	
Order product name	7.2BR30/PER/922-27/P/E26/WG 6/1FB
EAN/UPC - Product	046677457044
Order code	457044
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001870334
Net Weight (Piece)	0.100 kg

BR/R LED



Dimensional drawing



BR30 120V 19-120W 1200lm 2700K E26 D


Product	D	C
7.2BR30/PER/922-27/P/E26/WG 6/1FB	95 mm	132 mm

Photometric data

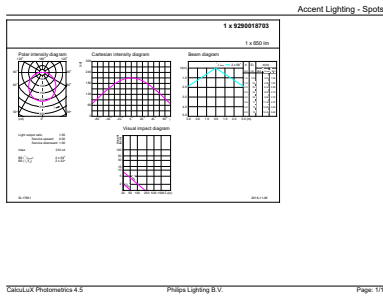

LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D



LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D

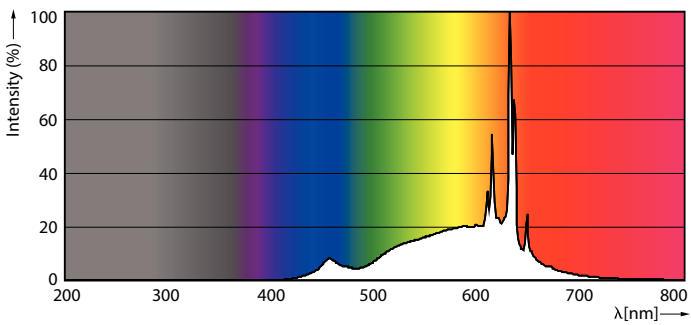

LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D

BR/R LED

Lifetime

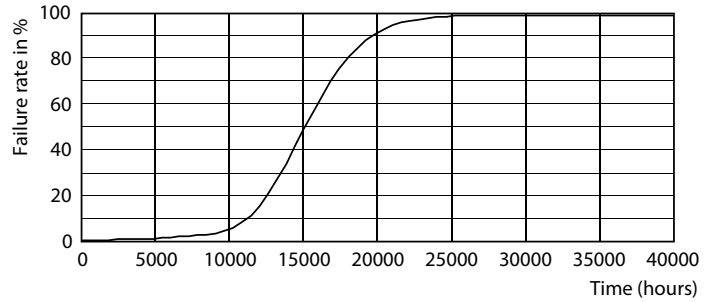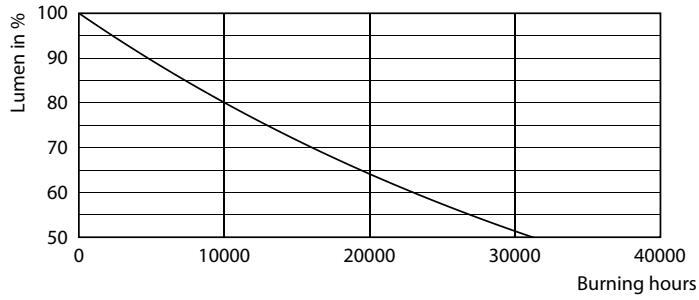

LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D

LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D

