

# **MASTER LEDspot LV**

## MASTER LED 7-50W 930 MR16 24D Dim CN

Delivering intense accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot lighting. MASTER LEDspot LV is designed to replace halogen or incandescent spots. It realizes natural colors, enables cozy and comfortable ambience for residential, hospitality and emphasizes the beauty of merchandise in retail. New smaller housing provides perfect fitting with majority of luminaires in a market with a MR16 GU 5.3 holder. It not only employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V halogen electronic transformers, it also delivers high beam intensity which is equivalent to halogen MR16 spots. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers. Its high SDCM ensure stricter color consistency, that is maintained over product life. MASTER LEDspot LV delivers huge energy savings and minimizes maintenance cost without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within short period time.

### **Product data**

| General Information      |                    |
|--------------------------|--------------------|
| Cap-Base                 | GU5.3 [GU5.3]      |
| Nominal lifetime         | 40,000 hour(s)     |
| Switching Cycle          | 50,000             |
| Lighting Technology      | LED                |
| EU RoHS compliant        | Yes                |
|                          |                    |
| Light Technical          |                    |
| Color Code               | 930 [CCT of 3000K] |
| Beam Angle (Nom)         | 24 degree(s)       |
| Luminous Flux            | 500 lm             |
| Luminous Intensity (Nom) | 2,500 cd           |
| Color Designation        | White (WH)         |

| Correlated Color Temperature (Nom)    | 3000 K     |
|---------------------------------------|------------|
| Luminous Efficacy (rated) (Nom)       | 71.00 lm/W |
| Color Consistency                     | <4         |
| Color rendering index (CRI)           | 90         |
| LLMF At End Of Nominal Lifetime (Nom) | 70 %       |
|                                       |            |
| Operating and Electrical              |            |
| Line Frequency                        | - Hz       |
| Input Frequency                       | - Hz       |
| Power Consumption                     | 7 W        |
| Lamp Current (Nom)                    | 830 mA     |
| Wattage Equivalent                    | 50 W       |
| Starting Time (Nom)                   | 0.5 s      |


Datasheet, 2023, November 12 data subject to change

# **MASTER LEDspot LV**

| Warm-up time to 60% light    | 0.5 s             |
|------------------------------|-------------------|
| Power Factor (Fraction)      | 0.7               |
| Voltage (Nom)                | 12 V              |
| Temperature                  |                   |
| Temperature                  |                   |
| T-Case Maximum (Nom)         | 90 ℃              |
|                              |                   |
| Controls and Dimming         |                   |
| Dimmable                     | Yes               |
|                              |                   |
| Mechanical and Housing       |                   |
| Bulb Shape                   | MR16 [2inch/50mm] |
|                              |                   |
| Approval and Application     |                   |
| Suitable For Accent Lighting | Yes               |


| Energy Consumption kWh/1000 h   | 8 kWh                                |  |
|---------------------------------|--------------------------------------|--|
|                                 |                                      |  |
| Product Data                    |                                      |  |
| Order product name              | MASTER LED 7-50W 930 MR16 24D Dim Cl |  |
| Full product name               | MASTER LED 7-50W 930 MR16 24D Dim CN |  |
| Full product code               | 692234190543800                      |  |
| Order code                      | 929001879910                         |  |
| Material Nr. (12NC)             | 929001879910                         |  |
| Numerator - Quantity Per Pack   | 1                                    |  |
| EAN/UPC - Product/Case          | 6922341905438                        |  |
| Numerator - Packs per outer box | 10                                   |  |
| EAN/UPC - Case                  | 6922341905445                        |  |
|                                 |                                      |  |

# Dimensional drawing




| Product                              | D       | С       |
|--------------------------------------|---------|---------|
| MASTER LED 7-50W 930 MR16 24D Dim CN | 50.5 mm | 46.5 mm |

#### Photometric data




Light Distribution Diagram - MASTER LED 7-50W 930 MR16 24D Dim CN

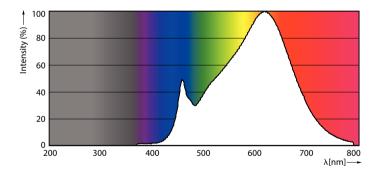

Spectral Power Distribution Colour - MASTER LED 7-50W 930 MR16 24D  $\operatorname{Dim} \operatorname{CN}$ 


# **MASTER LEDspot LV**

#### Photometric data



Accent Lighting Spots - MASTER LED 7-50W 930 MR16 24D Dim CN

#### Lifetime

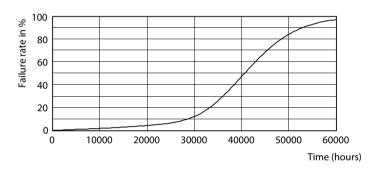

Lumen Maintenance Diagram - MASTER LED 7-50W 930 MR16 24D Dim CN

Life Expectancy Diagram - MASTER LED 7-50W 930 MR16 24D Dim CN



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.