



# **A-Shape LED**

## 5A19/PER/822-827/E26/CL/G/WGX 10/1CT

Philips A-shape LED lamps are the LED alternative to standard incandescents. It provides beautiful light and dependable performance you expect from LED at an affordable price.

#### **Product data**


General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	922-927 [CCT of 2200K-2700K]
Luminous Flux	450 lm
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	5 W
Lamp Current (Nom)	53 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7

Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	60 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	A19 [A 19mm]
Product Data	
Order product name	5A19/PER/822-827/E26/CL/G/WGX 10/1CT
Full product name	5A19/PER/822-827/E26/CL/G/WGX 10/1CT
Order code	929001933304
Material Nr. (12NC)	929001933304
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677536916
Numerator - Packs per outer box	10
EAN/UPC - Case	50046677536911
·	<u>-                                    </u>

Datasheet, 2023, December 6 data subject to change


### **A-Shape LED**

#### Dimensional drawing




Product	D	С
5A19/PER/822-827/E26/CL/G/WGX 10/1CT	61 mm	104 mm


#### Photometric data



Light Distribution Diagram - 5A19/PER/822-827/E26/CL/G/WGX 10/1CT




Spectral Power Distribution Colour - 5A19/PER/822-827/E26/CL/G/WGX 10/1CT




Accent Lighting Spots - 5A19/PER/822-827/E26/CL/G/WGX 10/1CT

#### **A-Shape LED**

#### Lifetime

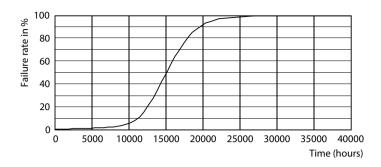



Life Expectancy Diagram - 5A19/PER/822-827/E26/CL/G/WGX 10/1CT

Lumen Maintenance Diagram - 5A19/PER/822-827/E26/CL/G/WGX 10/1CT

