



BR/R LED

5A19/PER/927-22/P/E26/WG 6/1FB T20

Philips BR Dimmable LED Lamps with AirFlux technology provide a soft, diffused level of light and smooth dimming to reduce glare. The sleek, lightweight design is ideal for downlighting.


Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	5-40W
Light Technical	
Color Code	922-927 [CCT of 2200K-2700K]
Beam Angle (Nom)	250 °
Luminous Flux (Nom)	450 lm
Luminous Flux (Rated) (Nom)	450 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2200-2700 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	5 W
Lamp Current (Nom)	55 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	65 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Product Data	
Order product name	5A19/PER/927-22/P/E26/WG 6/1FB T20
EAN/UPC - Product	046677479428
Order code	929001940704
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001940704
Net Weight (Piece)	0.084 kg

BR/R LED


Dimensional drawing



Bulb A19 5-40W 450lm 2200-2700K E26 D


Product	D	C
5A19/PER/927-22/P/E26/WG 6/1FB T20	62.5 mm	111.5 mm

Photometric data




© 2019 Philips Lighting B.V. Page 11

LEDBulb A19 E26 5-40W

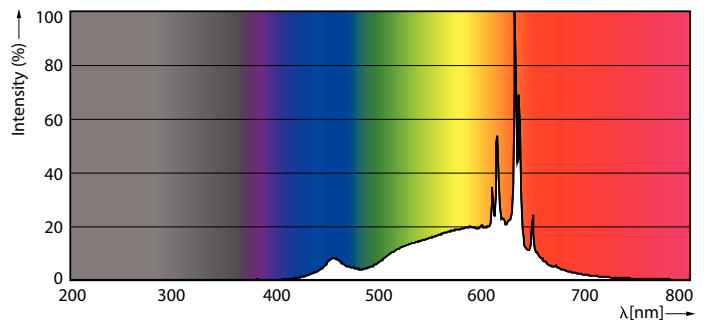



LEDBulb A19 E26 5-40W



LEDBulb A19 E26 5-40W

BR/R LED

Lifetime

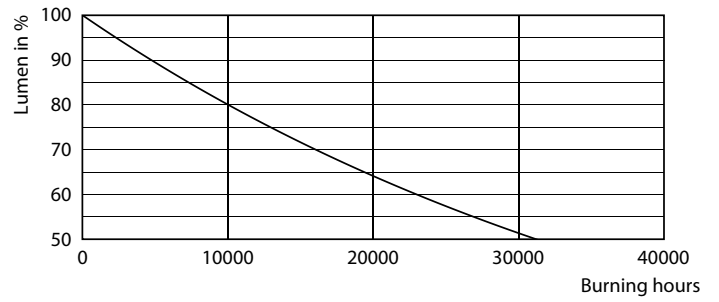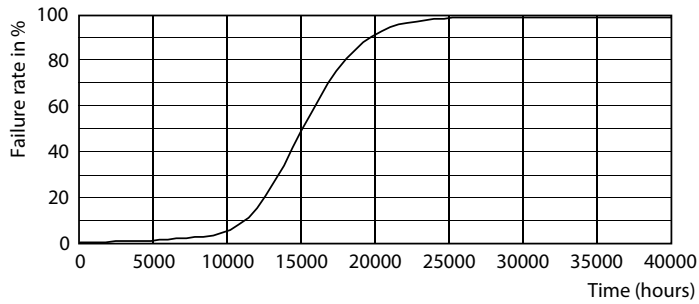

LEDBulb E26

LEDBulb E26

