



LED Highbay

45HB/LED/830/ND FB 6/1

Philips LED high bay lamps are a direct replacement for 250W to 400W metal halide lamps which will deliver substantial energy savings. Philips LED HighBays delivers bright, clean light for a fraction of the energy used by conventional HID.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	200 degree(s)
Luminous Flux	4,500 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	100.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	45 W
Lamp Current (Nom)	400 mA
Wattage Equivalent	100 W

0.5 s	
0.5 s	
0.92	
120 V	
Type B - bypass the ballast	
90 °C	
No	
Frosted	
Plastic	
T-shape	
- kWh	
45HB/LED/830/ND FB 6/1	
45HB/LED/830/ND FB 6/1	
929001989804	


Datasheet, 2023, November 12 data subject to change

LED Highbay

Material Nr. (12NC)	929001989804
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677541934
Numerator - Packs per outer box	6


EAN/UPC - Case	50046677541939
----------------	----------------

Dimensional drawing



Product	D	С
45HB/LED/830/ND FB 6/1	160 mm	264 mm

Photometric data






150°


(cd/1000lm)

180°

General uniform lighting - 45HB/LED/830/ND FB 6/1




120°




Spectral Power Distribution Colour - 45HB/LED/830/ND FB 6/1

LED Highbay

Lifetime

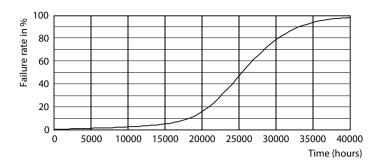

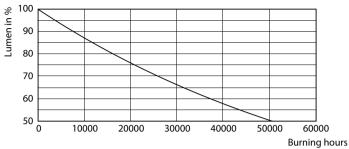

Life Expectancy Diagram - 45HB/LED/830/ND FB 6/1

Lumen Maintenance Diagram - 45HB/LED/830/ND FB 6/1

