



# TrueForce - LED HID HPL

## TForce LED HPL ND 60-42W E40 840

Philips TrueForce LED lamps provide an easy LED solution with a fast payback to replace High-Intensity Discharge (HID) and High Pressure Sodium (SON) lamps. These post-top lamps bring the energy efficiency and long lifetime benefits of LED to HID replacement, delivering instant savings for a low initial investment. With the right lamp size and light distribution, customers can easily retrofit TrueForce LED lamps into their existing HPL and SON system, thereby enhancing the light quality with LED HID, without having to change the fixtures or sacrifice the light effect.

### Warnings and Safety

- Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions
- Link to Ballast – igniter compatibility list <https://www.assets.signify.com/is/content/Signify/Assets/philips-lighting/global/HIDLED-EU-compatibility-list-professional.pdf>


### Product data

General Information		Color Designation	
Cap-Base	E40	Color Designation	Cool White (CW)
Nominal lifetime	50,000 hour(s)	Correlated Color Temperature (Nom)	4000 K
Switching Cycle	50,000	Luminous Efficacy (rated) (Nom)	142 lm/W
Lighting Technology	LED	Color Consistency	<6
Flux measurement reference	Sphere	Color rendering index (CRI)	80
CE mark	Yes	LLMF At End Of Nominal Lifetime (Nom)	70 %
EU RoHS compliant	Yes	Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Light Technical		Stroboscopic effect visibility measure (SVM)	1.6
Color Code	840 [CCT of 4000K]	Photobiological safety according to EN 62471	RG1
Beam Angle (Nom)	360 degree(s)	Operating and Electrical	
Luminous Flux	6,000 lm	Line Frequency	50 to 60 Hz

## TrueForce - LED HID HPL

Input Frequency	50 to 60 Hz
Power Consumption	42 W
Lamp Current (Nom)	186 mA
Starting Time (Nom)	0.45 s
Warm-up time to 60% light	0.45 s
Power Factor (Fraction)	0.95
Voltage (Nom)	220-240 V
Inrush current at mains	6.3
Max. lamp no. on MCB B type 10A - Mains	30
Max. lamp no. on MCB B type 10A - EM ballast without Comp. Cap.	30
Max. lamp no. on MCB B type 10A - EM ballast with Comp. Cap.	7
Max. lamp no. on MCB B type 16A - Mains	48
Max. lamp no. on MCB B type 16A - EM ballast without Comp. Cap.	48
Max. lamp no. on MCB B type 16A - EM ballast with Comp. Cap.	11
Ballast Compatibility	EM/Mains
<b>Temperature</b>	
Ambient temperature range	-30 to +45 °C
T-Case Maximum (Nom)	65 °C
<b>Controls and Dimming</b>	
Dimmable	No

### Dimensional drawing




<b>Mechanical and Housing</b>	
Bulb Finish	Clear
Bulb Shape	Others
<b>Approval and Application</b>	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	42 kWh
EPREL Registration Number	403606
<b>Product Data</b>	
Order product name	TForce LED HPL ND 60-42W E40 840
Full product name	TForce LED HPL ND 60-42W E40 840
Full product code	871869963828300
Order code	929002006802
Material Nr. (12NC)	929002006802
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699638283
Numerator - Packs per outer box	6
EAN/UPC - Case	8718699638290


Product	D	C
TForce LED HPL ND 60-42W E40 840	84 mm	191 mm

TrueForce - LED HID HPL


Photometric data



General uniform lighting - TForce LED HPL ND 60-42W E40 840

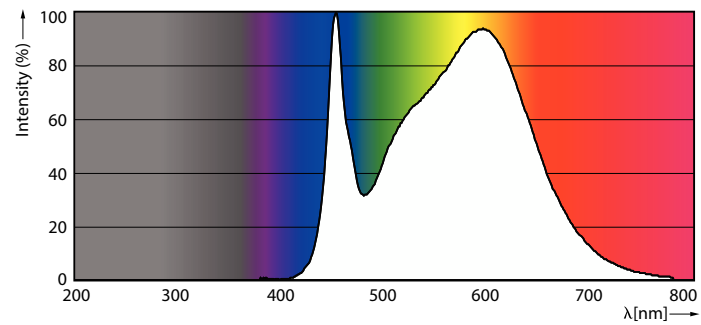


Spectral Power Distribution Colour - TForce LED HPL ND 60-42W E40 840




Light Distribution Diagram - TForce LED HPL ND 60-42W E40 840

Lifetime

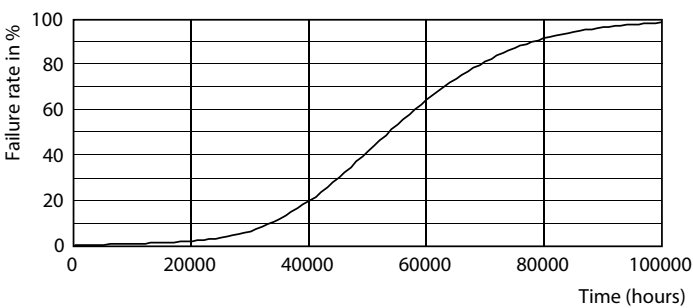

Life Expectancy Diagram - TForce LED HPL ND 60-42W E40 840

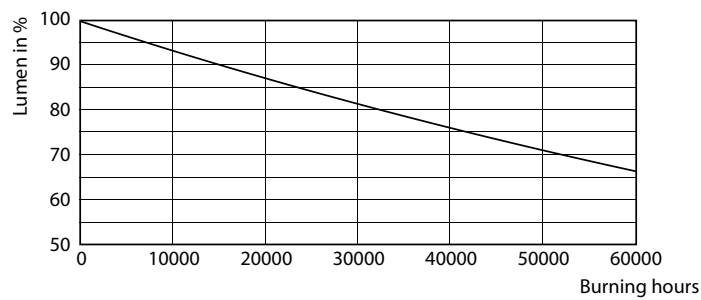

Lumen Maintenance Diagram - TForce LED HPL ND 60-42W E40 840

## TrueForce - LED HID HPL

