



LED BR30

7.2BR30/PER/930/P/E26/DIM 6/1FB T20

Philips BR30 LED lamps are the smart alternative to standard incandescent. The traditional lamp design can provide excellent dimming performance with spectacular energy savings. They provide the beautiful light and dependable performance you expect from LED at an economical price.


Product data

General Information	
Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	7.2-65W
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	90 °
Initial lumen (Nom)	650 lm
Luminous Flux (Rated) (Nom)	650 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	7.2 W
Lamp Current (Nom)	82 mA
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	75 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted (FR)
Product Data	
Order product name	7.2BR30/PER/930/P/E26/DIM 6/1FB T20
EAN/UPC - Product	046677545901
Order code	545905
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929002032104
Net Weight (Piece)	0.095 kg

LED BR30


Dimensional drawing




BR30 120V 7.2-65W 650lm 3000K E26 D

Product	D	C
7.2BR30/PER/930/P/E26/DIM 6/1FB T20	95 mm	132 mm


Photometric data



LEDBulbs_BR30 120V 72-65W 650lm 3000K E26 D

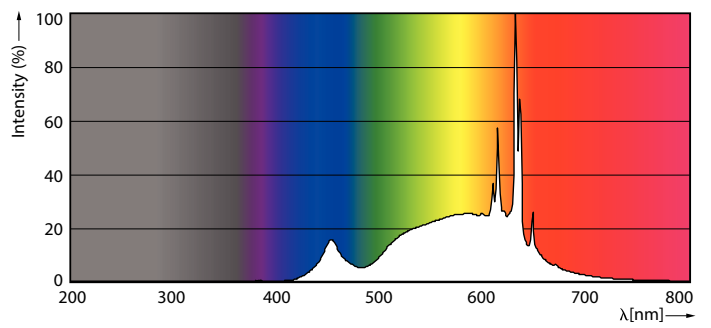

LEDBulbs_BR30 120V 72-65W 650lm 3000K E26 D





Technical Parameters 24 Page Lighting 2/17

LEDBulbs_BR30 120V 72-65W 650lm 3000K E26 D

LED BR30

Lifetime

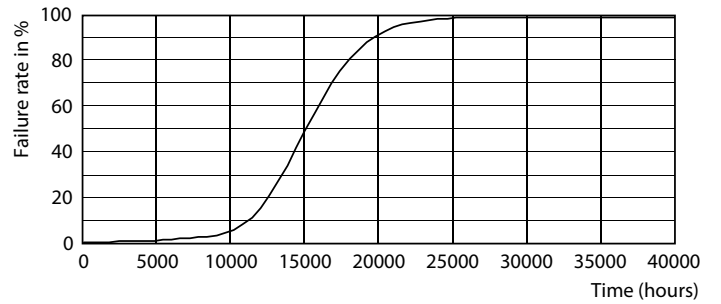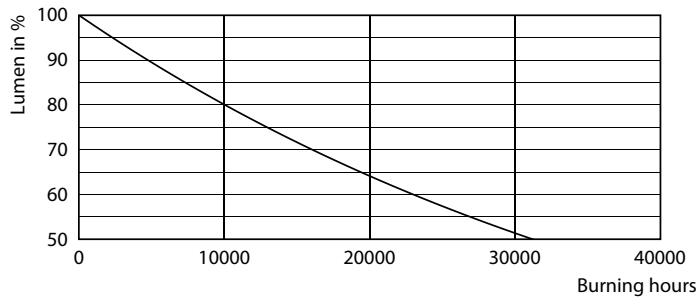

LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D

LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D

