


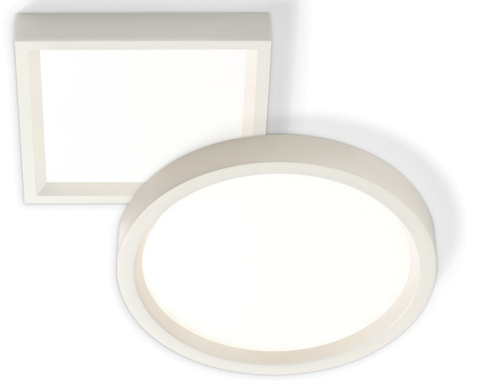

SlimSurface LED Downlight

SlimSurface LED 5" round downlight, 80 CRI, 3500K, 650 lm, 120/277V, 0-10V dimming, wet location, white finish

SlimSurface LED 5" round downlight, 80 CRI, 3500K, 650 lm, 120/277V, 0-10V dimming, wet location, white finish

SlimSurface LED is a low profile downlight intended for ceiling or wall mount applications. This 0.625" thick luminaire offers the appearance of a recessed downlight but is actually surface mounted.

Product data

General Information		Initial Performance (IEC Compliant)	
Lamp Source Code	LED	Luminaire Lumens	650
Colour Temperature	3500K		
CRI	80		
Downlight Type	Open Downlight		
Photometric Distribution Type	Direct		
Mounting	Surface Wall		
Operating and Electrical		Product Data	
Luminaire Input Watts	10	Order product name	SlimSurface LED 5" round downlight, 80 CRI, 3500K, 650 lm, 120/277V, 0-10V dimming, wet location, white finish
Voltages	120/277 V	Commercial Code	S5R835K7WZ10U
		Order code	S5R835K7WZ10U
		Catalog Number Description	SlimSurface LED 5" round downlight, 80 CRI, 3500K, 650 lm, 120/277V, 0-10V dimming, wet location, white finish
		Service / Spec Smart	Spec Smart (10 Days) USA
		Material Nr. (12NC)	LIGU60014027
Mechanical and Housing			
Aperture Size Code	5 in		
Shape	Round		

SlimSurface LED Downlight

