



# DBC1210

Signal Dimmer Controller

## Wall mount multi-protocol control solution

The Philips Dynalite DBC1210 is a 12-channel signal dimmer controller, featuring a maximum of load of 10 A per channel. It is designed for use with DALI, 1-10 V and DSI dimmable drivers and transformers.


# DBC1210

## Wall mount multi-protocol control solution

- **Multiple protocols supported** – Compatible with a range of fittings and devices including; DSI drivers, DSI electronic low voltage transformers, DALI drivers (broadcast mode only), DALI electronic low voltage transformers (broadcast mode only), 1-10 V drivers and other switched loads.
- **Service override switch** – Incorporated as standard, forces all channels to 100%.
- **Inbuilt diagnostic functionality** – Features Device Online/Offline status indication.
- **Options available** – Additional earth leakage and overload protection on each channel.

---

## Dimensions

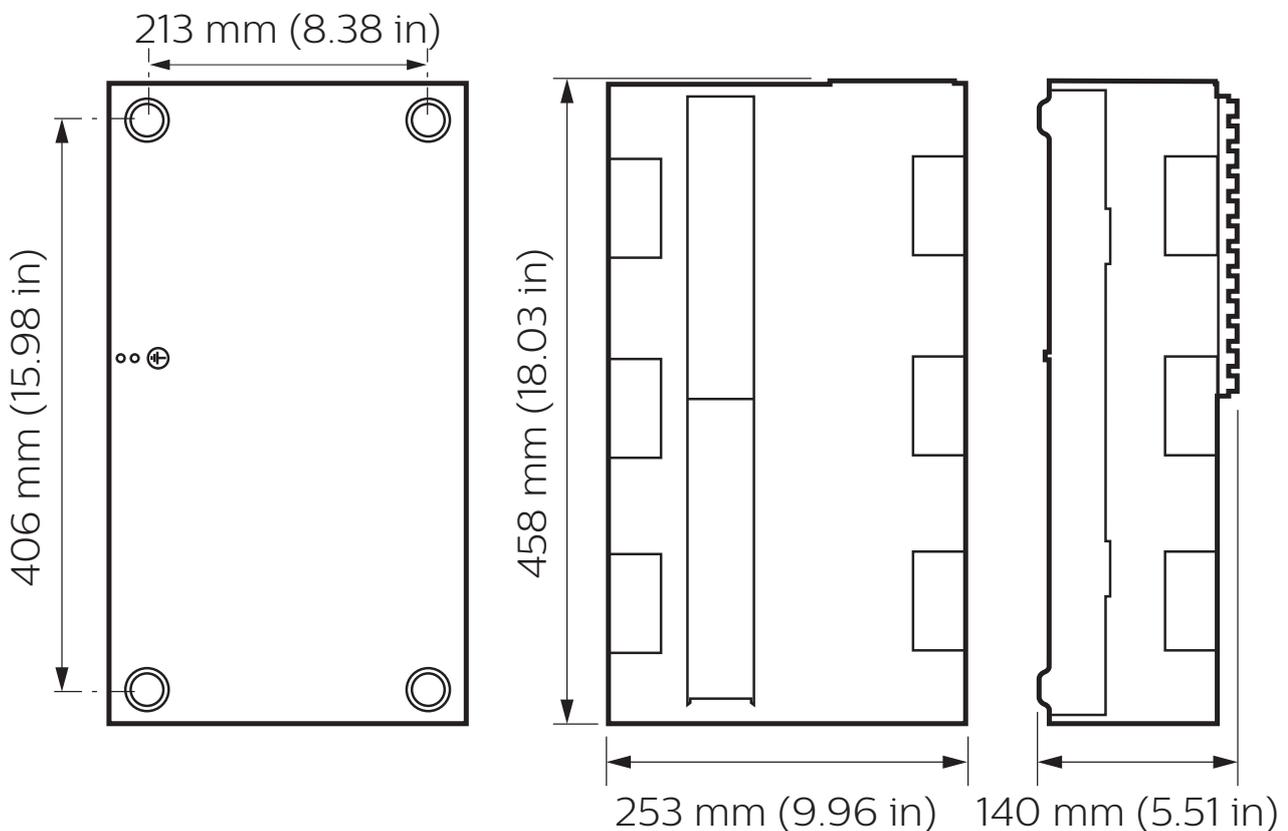

# Specifications

Due to continuous improvements and innovations, specifications may change without notice.



**DBC1210**  
Signal Dimmer Controller

## Electrical

Supply Type	Single-Phase Three-phase
Single-Phase Supply	240 VAC @ 63 A
Three-Phase Supply	240 / 400 VAC $\lambda$ @ 40 A/phase
DyNet DC Output Voltage	12 VDC
DyNet DC Output Current	120 mA
Switched Outputs	12 x 10 A resistive
Output Channel Ratings	(See below)
Electrical Protection	12 x 10 A circuit breakers (Single pole thermal magnetic, 6 kA surge)
Maximum CH-CH Voltage	400 VAC
IEC Overvoltage Category	III

## Control

Serial Ports	1 x RS-485
Supported Protocols	DyNet DMX Rx
DMX Rx Channels	12
Control Channel Outputs	12 (DALI Broadcast, DSI or 1-10 V)
Control Channel Ratings	(See below)
Dry Contact Inputs	1 (AUX)
User Input	1 x service switch 12 x channel override
Indicators	1 x diagnostic LED 12 x channel status LED
Diagnostic Functions	Device online/offline status

## Physical

Dimensions (H x W x D)	458 x 253 x 140 mm (18.31 x 9.96 x 5.51 in)
RCBO Versions:	585 x 252 x 126 mm (23.03 x 9.92 x 4.96 in)
Packed Weight	10.25 kg (22.60 lb)
Construction	Alloy/steel wall mount case Powder coat finish
Serial Ports	1 x RJ12 1 x 6-way pluggable screw terminal
Serial Port Conductor Size	2.5 mm <sup>2</sup> (#12 AWG) (max)
Supply Terminals	3 x screw terminal
Supply Terminal Conductor Size	10 mm <sup>2</sup> (#8 AWG) (max)
Control Terminals	24 x screw terminal
Control Terminal Conductor Size	5 mm <sup>2</sup> (#10 AWG) (max)
Output Terminals	12 x screw terminal
Output Terminal Conductor Size	16 mm <sup>2</sup> (#6 AWG) (max)
Earth Bar Terminals	14 x screw terminal
Earth Bar Terminal Conductor Size	2 x 16 mm <sup>2</sup> (#6 AWG) (max) 12 x 5 mm <sup>2</sup> (#10 AWG) (max)
Neutral Bar Terminals	15 x screw terminal
Neutral Bar Terminal Conductor Size	1 x 16 mm <sup>2</sup> (#6 AWG) (max) 14 x 5 mm <sup>2</sup> (#10 AWG) (max)

## Environment\*

Operating Temperature	0° to 50°C ambient (32° to 122°F)
Storage/Transport Temperature	-25° to 70°C ambient (-13° to 158°F)
Relative Humidity	0 to 95% non-condensing
IEC Pollution Degree	II

## Compliance

Certification	CE, RCM, UKCA, RoHS
---------------	---------------------


\* For indoor installation only

# Electrical



1 ~ 240 V ~ 63 A

3 ~ 240 / 400 V ~ 3 x 40 A

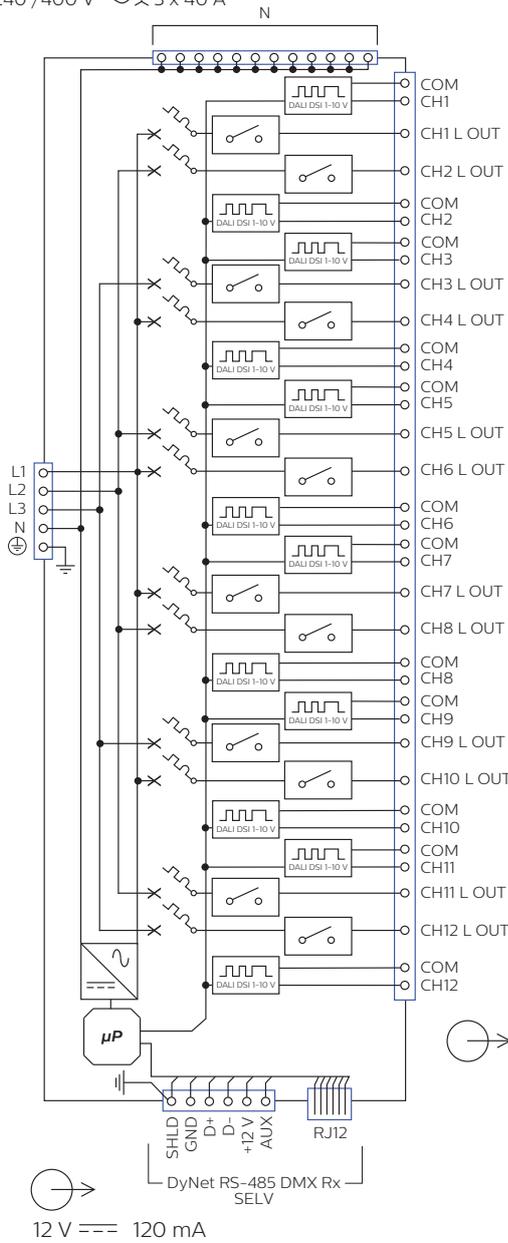

# Control Channel Ratings

DALI/DSI	Channel	Device
Output Voltage	12 VDC	
Guaranteed Current	128 mA	
Maximum Current	250 mA	
Maximum Drivers	64	400
Insulation	Basic	
1-10 V	Channel	
Current	sink 50 mA source 50 mA	

# Output Channel Ratings

Load Type	Maximum Rating per Output
	CH1-CH12
Electronic Ballast*	10 A, 240 VAC
Inrush Current	500 A
Total Device Load	≤ 120 A

\* Load de-rating may need to be applied to avoid nuisance circuit breaker tripping.

# Ordering Code

## Product

## Philips 12NC

DBC1210 (Standard product)

913703036009

DBC1210-RCBO (Earth leakage/overload protection)

913703036509



© 2021 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.