



The right choice for a broad range of new construction and retrofit applications

Centium T8 Instant Start

Reliable and energy efficient Philips Advance's Centium commercial grade specifications, plus added benefits of lamp striation reduction technology.

Benefits

- Compatible with Energy Saving lamps
- Eligible for Utility Rebates
- Maximizes fixture design
- Reduces packaging waste

Features

- IntelliVolt (120–277V) input voltage range
- Lamp Striation Reduction
- Meets NEMA Premium/CEE
- Smallest enclosure in industry

Application


- General office lighting, institutional, government, health care, school applications.

Centium T8 Instant Start

Versions



Dimensional drawing

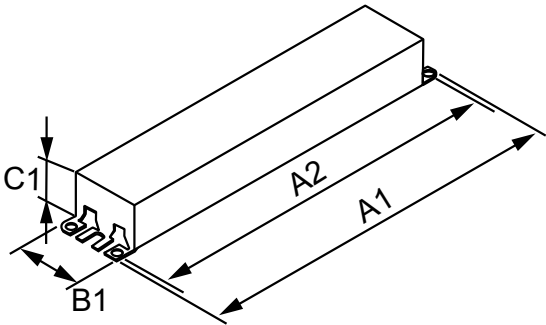

Product	A1	A2	B1	C1
CENTIUM ICN2P32N35M	9.50 in	8.90 in	1.30 in	1.00 in
CENTIUM ICN4P32N35M	9.50 in	8.90 in	1.30 in	1.00 in
CENTIUM ICN3P32N35M	9.50 in	8.90 in	1.30 in	1.00 in

Operating and Electrical	
Input Frequency	50 to 60 Hz
Input Voltage	120 to 277 V
Total Harmonic Distortion USA	10 %
General Information	
Lamp Type	F32T8
Mechanical and Housing	
Housing	N

General Information

Order Code	Full Product Name	Number Of Lamps
		2/3 piece/unit
		3/4 piece/unit

Order Code	Full Product Name	Number Of Lamps
06913430	CENTIUM ELE BALLAST (2) F32T8 120-277V	1/2 piece/unit

Centium T8 Instant Start

