



Appropriate choice for many fluorescent lamp types on the market

Standard

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Benefits

- 60 HZ lamp operation eliminates possible EMI/RFI interference

Features


- Only choice for many low volume lamp types on the market

Application

- General office, warehouses, gymnasiums, manufacturing facilities, parking garages

Standard

Versions



LC1420CTPI



REL2P59SRHTP351



RLCS140TPWI



H1B9TPWM



H1Q26TPWM



VH1B9TPWM



LO1322TPM




VH2B13TPBLSM






RC2S102TPI

Dimensional drawing

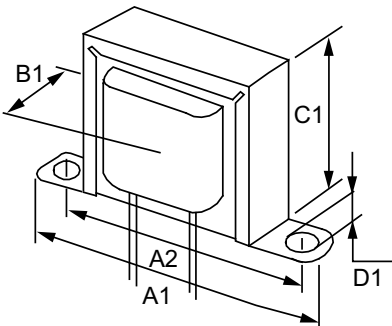

Product	A1	A2	B1	C1	D1
STANDARD LPL59TPI	2.38 in	2 in	1.59 in	1.38 in	0.19 in
STANDARD LPL79M	2.38 in	2 in	1.59 in	1.38 in	0.19 in
STANDARD LPL59TPM	2.38 in	2 in	1.59 in	1.38 in	0.19 in
STANDARD LPL59M	2.38 in	2 in	1.59 in	1.38 in	0.19 in

Dimensional drawing

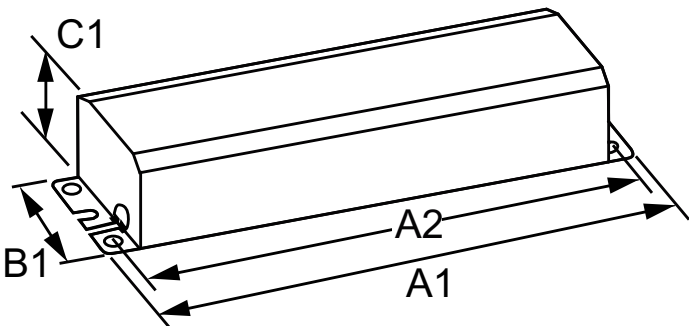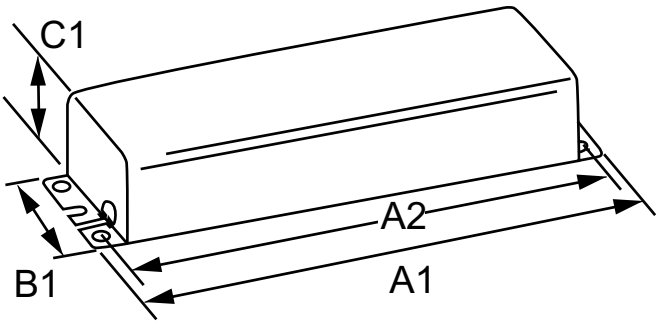


Product	A1	A2	B1	C1
STANDARD VH2Q26TPBLSM	9.5 in	8.91 in	2.38 in	1.69 in
STANDARD VC2S102TPI	14.31 in	13.75 in	3.19 in	2.63 in
STANDARD VS2S200TPI	14.31 in	13.75 in	3.19 in	2.63 in
STANDARD VH1Q26TPWM	4.75 in	4.38 in	2.22 in	1.63 in
STANDARD RS2S200TPI	14.31 in	13.75 in	3.19 in	2.63 in
STANDARD RC2S200TPI	14.31 in	13.75 in	3.19 in	2.63 in
STANDARD RC2S102TPI	14.31 in	13.75 in	3.19 in	2.63 in
STANDARD H1B13TPWI	4.25 in	3.56 in	2 in	1.44 in
STANDARD H2Q26TPBLSM	9.5 in	8.91 in	2.38 in	1.69 in
STANDARD VH2B13TPBLSM	4.75 in	4.38 in	2.22 in	1.63 in
STANDARD VH1B13TPWI	4.75 in	4.38 in	2.22 in	1.63 in
STANDARD VH1B9TPWM	4.75 in	4.38 in	2.22 in	1.63 in
STANDARD RLQ120TPM	6.5 in	6 in	1.94 in	1.38 in
STANDARD H1B9TPWM	4.25 in	3.56 in	2 in	1.44 in
STANDARD RLQS122TPWI	6.5 in	6 in	1.94 in	1.38 in
STANDARD RLQ120TPI	6.5 in	6 in	1.94 in	1.38 in
STANDARD RLCS140TPWI	6.5 in	6 in	1.94 in	1.38 in

Product	A1	A2	B1	C1
STANDARD LO1322M	3.06 in	2.75 in	1.44 in	1.81 in
STANDARD VLO2S13TPI	4 in	3.5 in	1.81 in	2.25 in
STANDARD VLO13TPI	3.75 in	2.19 in	1.75 in	2 in
STANDARD LOS1Q28M	3.06 in	2.75 in	1.5 in	1.81 in
STANDARD LO1322TPM	3.06 in	2.75 in	1.44 in	1.81 in

Product	A1	A2	B1	C1
STANDARD RS3240TPWI	6.5 in	6 in	2.38 in	1.5 in
STANDARD HM1P20TPI	9.5 in	8.91 in	2.38 in	1.5 in
STANDARD H2B13TPBLSM	6.5 in	6 in	2.38 in	1.5 in
STANDARD H1Q26TPBLSM	6.5 in	6 in	2.38 in	1.5 in
STANDARD HM2SP20TPI	9.5 in	8.91 in	2.38 in	1.5 in
STANDARD HM2SP20TPM	9.5 in	8.91 in	2.38 in	1.5 in
STANDARD H1Q26TPWI	6.5 in	6 in	2.38 in	1.5 in
STANDARD RS2232TPWI	6.5 in	6 in	2.38 in	1.5 in
STANDARD RL2SP20TPI	6.5 in	6 in	2.38 in	1.5 in

Standard

Dimensional drawing

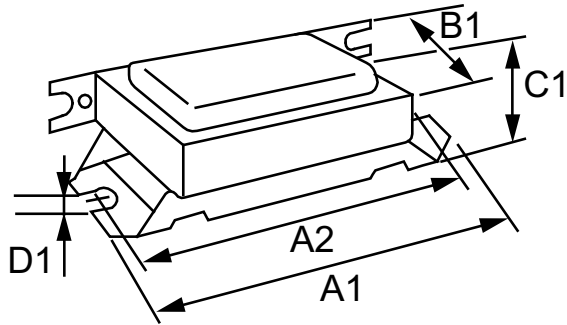

Operating and Electrical

Input Frequency	60 Hz
-----------------	-------

Operating and Electrical

Order Code	Full Product Name	Input Voltage	Total Harmonic Distortion USA
913700500921	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
913700500931	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	10 %
913700507251	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	120 V	15 %
913700507271	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
913700564209	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
913700590509	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	120 V	15 %
913700590709	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	15 %
913710305701	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
913710305901	STANDARD MAG BALLAST (1) F25T12 PH 120V	120 V	10 %
913700501071	STANDARD MAG BALLAST (2) F20T12 PH 120V	120 V	10 %
913700501091	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
913700508051	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
913700564109	STANDARD MAG BALLAST (2) F20T12 PH 120V	120 V	10 %
913700564119	STANDARD MAG BALLAST (2) F20T12 PH 120V	120 V	10 %
913710304601	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %

Product	A1	A2	B1	C1	D1
STANDARD LC25TPI	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC1420CI	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC49CTPM	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC13TPI	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC1420CM	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC1420CTPM	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC13TPM	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC49CI	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC1420CTPI	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in

Order Code	Full Product Name	Input Voltage	Total Harmonic Distortion USA
913700501081	STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V	120 V	10 %
913700501111	STANDARD MAG BALLAST (1) FC8T9 CIRCLINE 120V	120 V	10 %
913700501131	STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V	120 V	15 %
913710311701	STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V	120 V	20 %
913700506409	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V	120 V	20 %
913710304401	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	120 V	25 %
913700506819	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	120 V	25 %
913700589209	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	120 V	25 %
913700589709	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V	120 V	15 %
913700508311	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 277V	277 V	35 %
913700517819	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V	277 V	30 %
913710315502	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 277V	277 V	20 %
913700509209	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	15 %
913700509509	STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V	120 V	15 %
913700509609	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	10 %

Standard

Order Code	Full Product Name	Input Voltage	Total Harmonic Distortion USA
913700509709	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	15 %
913700509809	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	10 %
913700557219	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V	277 V	10 %
913710316201	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	277 V	15 %
913710329302	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
913710350701	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	15 %
913700518509	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	277 V	35 %

Order Code	Full Product Name	Input Voltage	Total Harmonic Distortion USA
913700589409	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V	120 V	30 %
913710339202	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 277V	277 V	25 %
913710309901	STANDARD MAG BALLAST (2) F48T12/VHO 120V	120 V	30 %
913710310001	STANDARD MAG BALLAST (2) F96T12/VHO 120V	120 V	20 %
913710311601	STANDARD MAG BALLAST (2) F96T12/VHO 120V	120 V	15 %
913710317001	STANDARD MAG BALLAST (2) F96T12/VHO 277V	277 V	20 %
913710323801	STANDARD MAG BALLAST (2) F48T12/VHO 277V	277 V	35 %

General Information

Order Code	Full Product Name	Number Of Lamps	Lamp Type
913700500921	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
913700500931	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	F8T5
913700507251	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	1 piece/unit	CFQ13W/GX23
913700507271	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
913700564209	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
913700590509	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	1 piece/unit	CFQ13W/GX23
913700590709	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	CFQ9W/G23
913710305701	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
913710305901	STANDARD MAG BALLAST (1) F25T12 PH 120V	1 piece/unit	F25T12
913700501071	STANDARD MAG BALLAST (2) F20T12 PH 120V	2 piece/unit	F20T12
913700501091	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
913700508051	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
913700564109	STANDARD MAG BALLAST (2) F20T12 PH 120V	2 piece/unit	F20T12
913700564119	STANDARD MAG BALLAST (2) F20T12 PH 120V	2 piece/unit	F20T12
913710304601	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
913700501081	STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V	1 piece/unit	FC16T9

Order Code	Full Product Name	Number Of Lamps	Lamp Type
913700501111	STANDARD MAG BALLAST (1) FC8T9 CIRCLINE 120V	1 piece/unit	FC8T9
913700501131	STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V	2 piece/unit	FC8T9 & FC12T9
913710311701	STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V	2 piece/unit	FC12T9 & FC16T9
913700506409	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V	1 piece/unit	CFQ9W/G23
913710304401	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	1 piece/unit	CFQ13W/GX23
913700506819	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	1 piece/unit	CFQ26W/G24D
913700589209	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	1 piece/unit	CFQ26W/G24D
913700589709	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V	2 piece/unit	CFQ26W/G24D
913700508311	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 277V	1 piece/unit	CFQ9W/G23
913700517819	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V	1 piece/unit	CFQ13W/GX23
913710315502	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 277V	1 piece/unit	CFQ26W/G24D
913700509209	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
913700509509	STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V	1 piece/unit	CFQ27W/GX32D
913700509609	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	F8T5
913700509709	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	CFQ9W/G23
913700509809	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	F8T5

Standard

Order Code	Full Product Name	Number Of Lamps	Lamp Type
913700557219	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V	1 piece/unit	CFQ13W/GX23
913710316201	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	2 piece/unit	CFQ13W/GX23
913710329302	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
913710350701	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	CFQ9W/G23
913700518509	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	2 piece/unit	CFQ13W/GX23
913700589409	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V	2 piece/unit	CFQ13W/GX23

Order Code	Full Product Name	Number Of Lamps	Lamp Type
913710339202	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 277V	2 piece/unit	CFQ26W/G24D
913710309901	STANDARD MAG BALLAST (2) F48T12/VHO 120V	1/2 piece/unit	F96T12/VHO
913710310001	STANDARD MAG BALLAST (2) F96T12/VHO 120V	1/2 piece/unit	F96T12/VHO
913710311601	STANDARD MAG BALLAST (2) F96T12/VHO 120V	1/2 piece/unit	F96T12/VHO
913710317001	STANDARD MAG BALLAST (2) F96T12/VHO 277V	1/2 piece/unit	F96T12/VHO
913710323801	STANDARD MAG BALLAST (2) F48T12/VHO 277V	1/2 piece/unit	F96T12/VHO

Mechanical and Housing

Order Code	Full Product Name	Housing
913700500921	STANDARD MAG BALLAST (1) F20T12 PH 120V	C2
913700500931	STANDARD MAG BALLAST (1) F8T5 PH 120V	C2
913700507251	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	C2
913700507271	STANDARD MAG BALLAST (1) F20T12 PH 120V	C2
913700564209	STANDARD MAG BALLAST (1) F20T12 PH 120V	C2
913700590509	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	C2
913700590709	STANDARD MAG BALLAST (1) F8T5 PH 120V	C2
913710305701	STANDARD MAG BALLAST (1) F20T12 PH 120V	C2
913710305901	STANDARD MAG BALLAST (1) F25T12 PH 120V	C2
913700501071	STANDARD MAG BALLAST (2) F20T12 PH 120V	T1
913700501091	STANDARD MAG BALLAST (1) F20T12 PH 120V	R4
913700508051	STANDARD MAG BALLAST (1) F20T12 PH 120V	R4
913700564109	STANDARD MAG BALLAST (2) F20T12 PH 120V	T2
913700564119	STANDARD MAG BALLAST (2) F20T12 PH 120V	T2
913710304601	STANDARD MAG BALLAST (1) F20T12 PH 120V	T2
913700501081	STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V	R4
913700501111	STANDARD MAG BALLAST (1) FC8T9 CIRCLINE 120V	R4
913700501131	STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V	T1
913710311701	STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V	T1
913700506409	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V	R1
913710304401	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	R1
913700506819	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	T1

Order Code	Full Product Name	Housing
913700589209	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	T1
913700589709	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V	R5
913700508311	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 277V	R2
913700517819	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V	R2
913710315502	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 277V	R2
913700509209	STANDARD MAG BALLAST (1) F20T12 PH 120V	X3
913700509509	STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V	X6
913700509609	STANDARD MAG BALLAST (1) F8T5 PH 120V	X1
913700509709	STANDARD MAG BALLAST (1) F8T5 PH 120V	X1
913700509809	STANDARD MAG BALLAST (1) F8T5 PH 120V	X2
913700557219	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V	X5
913710316201	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	X8
913710329302	STANDARD MAG BALLAST (1) F20T12 PH 120V	X3
913710350701	STANDARD MAG BALLAST (1) F8T5 PH 120V	X1
913700518509	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	R2
913700589409	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V	T1
913710339202	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 277V	R5
913710309901	STANDARD MAG BALLAST (2) F48T12/VHO 120V	R11
913710310001	STANDARD MAG BALLAST (2) F96T12/VHO 120V	R11
913710311601	STANDARD MAG BALLAST (2) F96T12/VHO 120V	R11
913710317001	STANDARD MAG BALLAST (2) F96T12/VHO 277V	R11
913710323801	STANDARD MAG BALLAST (2) F48T12/VHO 277V	R11

