



# HID-Constant wattage BSX for SOX

## BSX 180 H96 220-240V 50Hz CW-178/78

Constant-wattage (potted) electromagnetic copper/iron ballasts for use with an external ignitor for SOX and SOX-E lamps


### Product data

<b>Operating and Electrical</b>	
Input Voltage	220 to 240 V
Line Frequency	50 Hz
Input Frequency	50 Hz
<b>Wiring</b>	
Connector Type	Screw
<b>Approval and Application</b>	
Approval Marks	CE marking ENEC certificate
<b>Product Data</b>	
Order product name	BSX 180 H96 220-240V 50Hz CW-178/78

Full product name	BSX 180 H96 220-240V 50Hz CW-178/78
Full product code	871150093900599
Order code	913626027226
Material Nr. (12NC)	913626027226
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500939005
Numerator - Packs per outer box	4
EAN/UPC - Case	8711500932167

# HID-Constant wattage BSX for SOX

## Dimensional drawing

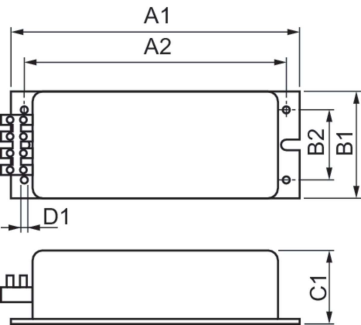

Product	D1	C1	A1	A2	B1	B2
BSX 180 H96 220-240V 50Hz CW-178/78	4.2 mm	78.0 mm	178.0 mm	162.0 mm	100.0 mm	42.0 mm

