

HID-Constant wattage BSX for SOX

BSX 135 H96 220-240V 50Hz CW-149/67

Constant-wattage (potted) electromagnetic copper/iron ballasts for use with an external ignitor for SOX and SOX-E lamps

Product data

Operating and Electrical	
Input Voltage	230 to 240 V
Line Frequency	50 Hz
Input frequency	50 Hz

Wiring	
Connector type	Screw


Approval and Application	
Approval marks	CE marking ENEC certificate

Product Data	
Order product name	BSX 135 H96 220-240V 50Hz CW-149/67

Full product name	BSX 135 H96 220-240V 50Hz CW-149/67
Full EOC	871150092007299
Order code	92007299
Material no. (12 NC)	913654097226
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8711500920072
Numerator – packs per outer box	8
EAN/UPC – Case	8711500932228

HID-Constant wattage BSX for SOX

Dimensional drawing

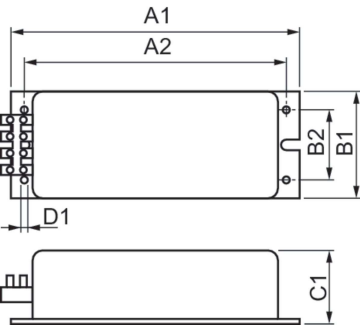

Product	D1	C1	A1	A2	B1	B2
BSX 135 H96 220-240V 50Hz CW-149/67	4.2 mm	67.0 mm	149.0 mm	135.0 mm	80.0 mm	42.0 mm

