



Standard

STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information	
Lamp Type	CFQ13W/GX23
Number of Lamps	2 piece/unit
Lamp Footage	-
Ballast Type	Magnetic Fluorescent
Base Model	H2B13TPBLS
Suitable For Outdoor Use	Yes
Automatic Restart	Yes
Operating and Electrical	
Input Voltage	120 V
Input Frequency	60 Hz
Total Harmonic Distortion USA	30 %
Ignition Method	Preheat
Crestfactor (Nom)	1.7
Ignition Time (Nom)	1s
Input Current (Open Circuit)	0
Input Current (Starting)	0.44
Ballast Factor (Nom)	1.02
Power Factor (Nom)	0.95
Input Current (Nom)	0.3 A
Input Power (Nom)	35 W

Rated Lamp Power	13 W	
Wiring		
Wire Striplength	0.50/0.375 mm	
Lamp Connection	Series	
Wire Length by Color	See data sheet	
Wire Gauge (Nom)	18AWG mm	
Wire Type	Solid	
Remote Wiring Configuration Allowed	Yes	
Tandem Wiring Configuration Allowed	Yes	
Through Wiring Configuration Allowed	Yes	
Max Ballast-Lamp Distance Remote Wiring	30'	
Max Ballast-Lamp Distance Tandem Wiring	Any = 30'	
Max Ballast-Lamp Distance Through Wiring Any = 30'		
Mechanical and Housing		
Housing Material	Metal	
Housing	T1	
Housing Dimensions	6.5" x 2.38" x 1.5"	
Approval and Application		
EMC Immunity Standard	FCC Non-Consumer	


Datasheet, 2019, March 22 data subject to change

Standard

Approval Marks	CSA certificate UL certificate RoHS
	Compliant
Hum And Noise Level	А
UL Recognized	No
Product Data	
Order product name	STANDARD MAG BALLAST (2) 13W
	COMPACT(2-PIN) 120V
EAN/UPC - Product	781087048092

Order code	504647
Local order code	504647
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	913700589409
Net Weight (Piece)	749.000 g
·	

Dimensional drawing

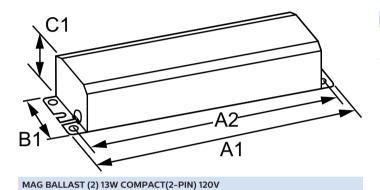

 Product
 A1
 A2
 B1
 C1

 STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN)
 6.5 in
 6 in
 2.38 in
 1.5 in

 120V



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.