



# **Transformers**

# **AUTO-TRANSFORMER AUTOXFMR 480:277 350VA C&C JBOX**

Stepdown transformers and autotransformers are used when you need to connect a lower voltage device to a higher voltage source.

#### **Product data**


General Information				
Circuit Type	Transformer			
Ballast Type	Magnetic HID			
Base Model	71A9843J			
Core Size	7/8" E/I			
Suitable For Outdoor Use	Yes			
Operating and Electrical				
Input Voltage	347:190 or 480:270 V			
Input Frequency	60 Hz			
Input Current (Operating) (Nom)	1 A			
Rated Lamp Watts	350 VA load W			
Wiring				
Wire Striplength	0.5 mm			
Wire Length by Color	8-1/2"			
Wire Type	Stranded			
Remote Wiring Configuration Allowed	Yes			
Mechanical and Housing				
Housing Material	Metal			

Housing	Coil cover wtih 1-2 NIP				
Housing Dimensions	4.7" x 2.19" x 2.63"				
Approval and Application					
Approbation Marks	ULR CSA certificate RoHS Compliant				
Temperature Marking	Thermally protected				
UL Recognized	Yes				
UL Insulation Class	H(180°C)				
UL Temperature Code	NA				
Product Data					
Order product name	AUTO-TRANSFORMER 71A9843600J				
EAN/UPC - Product	781087129630				
Order code	71A9843600J				
Numerator - Quantity Per Pack	1				
Numerator - Packs per outer box	8				
Material Nr. (12NC)	913701150902				
Net Weight (Piece)	1.965 kg				

Datasheet, 2019, February 12 data subject to change

## **Transformers**

### Dimensional drawing

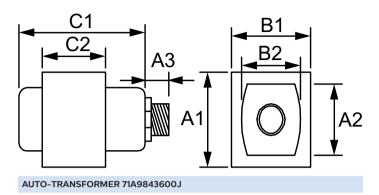

Product	C1	C2	A1	A2	B1	B2
AUTO-TRANSFORMER	4.4 in	2.35 in	2.63 in	1.81 in	2.19 in	1.84 in
71A9843600J						



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.