



Xitanium LED Driver Outdoor Fixed (US)

XITANIUM 10W 0.35A 28V 120V 60HZ OUTDOOR

Xitanium Outdoor LED Drivers are available in wattages from 40W to 150W for hard-wire integration into outdoor luminaires for the most rugged applications. These drivers operate to specification under wide temperature and electrical ranges to ensure reliability.


Product data

General Information	
Lighting Technology	LED
Operating and Electrical	
Line Frequency	60 Hz
Input Frequency	60 Hz
Total Harmonic Distortion IEC (Max)	20 %
Power Consumption	12.5 W
Maximum Efficiency at Full Load	85 %
Output Current (Nom)	350 mA
Input Current (Max)	100 mA
Output Power (Nom)	10 W
Wiring	
Connector Type Input Terminals	Wago 250
Output Wire Length	152.4 mm mm
Input Wire Gauge	18
Temperature	
Ambient temperature range	-40 °C to 60 °C

T-Case Maximum (Max)	90 °C
Approval and Application	
EMI Standard	FCC 47 Subpart 18; Class A
Environmental Standard	UL Damp & Dry
Approval Marks	RoHS compliance UL certificate CSA certificate
Product Data	
Full product code	871016319622000
Order product name	XITANIUM 10W 0.35A 28V 120V 60HZ OUTDOOR
Order code	913710267302
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	80
Material Nr. (12NC)	913710267302
Full product name	XITANIUM 10W 0.35A 28V 120V 60HZ OUTDOOR
EAN/UPC - Case	50781087045157
EAN/UPC - Product/Case	781087045145

Xtanium LED Driver Outdoor Fixed (US)

Dimensional drawing

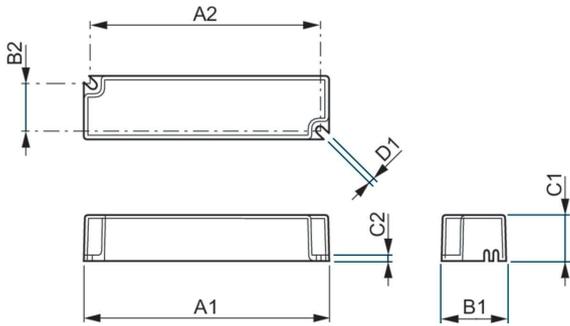

Product	D1	B2	C1	C2	A1	A2	B1
XITANIUM 10W	3.8 mm	24.6	24.9	3.0 mm	132.0	122.4	34.3
0.35A 28V 120V		mm	mm		mm	mm	mm
60HZ OUTDOOR							

