



Transformers

AUTO-TRANSFORMER AUTOXFMR 277:115 300VA JBOX

Stepdown transformers and autotransformers are used when you need to connect a lower voltage device to a higher voltage source.

Product data


General Information				
Circuit Type	Transformer			
Ballast Type	Magnetic HID			
Base Model	71A9741J			
Core Size	7/8" E/I			
Suitable For Outdoor Use	Yes			
Operating and Electrical				
Input Voltage	277:120 or 120:277 V			
Input Frequency	60 Hz			
Input Current (Nom)	1.1 A			
Rated Lamp Power	300 VA load W			
Wiring				
Wire Striplength	0.5 mm			
Wire Length by Color	8-1/2"			
Wire Type	Stranded			
Remote Wiring Configuration Allowe	d Yes			
Mechanical and Housing				
Housing Material	Metal			
Housing	Coil cover wtih 1-2 NIP			

Housing Dimensions	4.0" x 2.19" x 2.63"					
Approval and Application						
Approval Marks	ULR RoHS Compliant					
Temperature Marking	Thermally protected					
UL Recognized	Yes					
UL Insulation Class	H(180°C)					
UL Temperature Code	NA					
Product Data						
Order product name	AUTO-TRANSFORMER AUTOXFMR 277:115					
	300VA JBOX					
EAN/UPC - Product	781087042601					
Order code	493221					
Local order code	493221					
Numerator - Quantity Per Pack	1					
Numerator - Packs per outer box	16					
Material Nr. (12NC)	913710559502					
Net Weight (Piece)	1.575 kg					

Datasheet, 2019, March 22 data subject to change

Transformers

Dimensional drawing

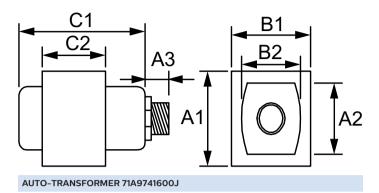

Product	C 1	C2	A1	A2	B1	B2
AUTO-TRANSFORMER AUTOXFMR	4 in	2 in	2.63 in	1.81 in	2.19 in	1.84 in
277:115 300VA JBOX						



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.