


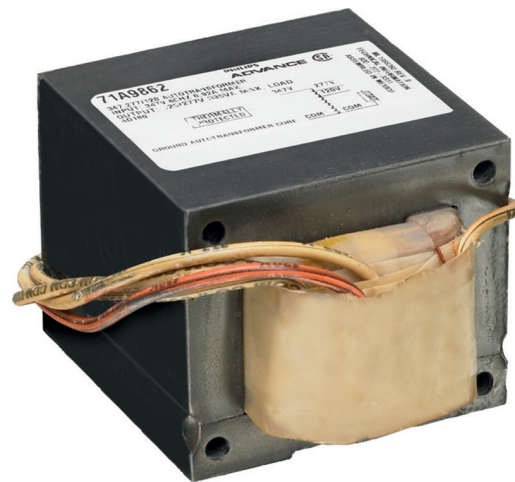

# Transformers

## AUTO-TRANSFORMER ISOXFMR 277:11.8V 75W C&C

Stepdown transformers and autotransformers are used when you need to connect a lower voltage device to a higher voltage source.


### Product data

|                                     |                |
|-------------------------------------|----------------|
| <b>General Information</b>          |                |
| Circuit Type                        | Transformer    |
| Ballast Type                        | Magnetic HID   |
| Base Model                          | 71A9833C       |
| Core Size                           | 7/8" E/I       |
| Suitable For Outdoor Use            | Yes            |
| <b>Operating and Electrical</b>     |                |
| Input Voltage                       | 277:12 V       |
| Input Frequency                     | 60 Hz          |
| Input Current (Nom)                 | 0.3 A          |
| Rated Lamp Power                    | 50W/75W load W |
| <b>Wiring</b>                       |                |
| Wire Striplength                    | 0.5 mm         |
| Wire Length by Color                | 6"             |
| Wire Type                           | Stranded       |
| Remote Wiring Configuration Allowed | Yes            |
| <b>Mechanical and Housing</b>       |                |
| Housing                             | NA             |

|                                 |                                            |
|---------------------------------|--------------------------------------------|
| Housing Dimensions              | NA                                         |
| <b>Approval and Application</b> |                                            |
| Approval Marks                  | ULR CSA certificate RoHS Compliant         |
| Temperature Marking             | NA                                         |
| UL Recognized                   | Yes                                        |
| UL Insulation Class             | H(180°C)                                   |
| UL Temperature Code             | NA                                         |
| <b>Product Data</b>             |                                            |
| Order product name              | AUTO-TRANSFORMER ISOXFMR 277:11.8V 75W C&C |
| EAN/UPC - Product               | 781087092774                               |
| Order code                      | 493387                                     |
| Local order code                | 493387                                     |
| Numerator - Quantity Per Pack   | 1                                          |
| Numerator - Packs per outer box | 16                                         |
| Material Nr. (12NC)             | 913710560102                               |
| Net Weight (Piece)              | 1.030 kg                                   |

Transformers

Dimensional drawing



| Product                      | C1     | C2     | A1     | A2     | B1     | B2     |
|------------------------------|--------|--------|--------|--------|--------|--------|
| AUTO-TRANSFORMER 71A9833600C | 2.8 in | 1.2 in | 2.6 in | 2.2 in | 2.2 in | 1.8 in |

AUTO-TRANSFORMER 71A9833600C

