


LIGHTOLIER®


Page 1 of 2



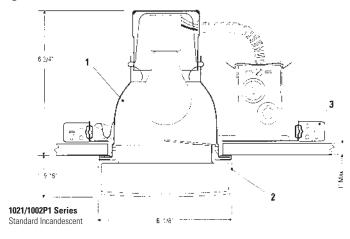



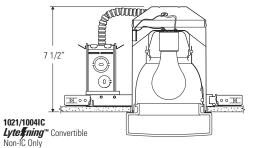



Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In	Kit — See Ir	ndividua	I Fram	e-In Kit Specifi	cation Sheets						
		Incandescen	it		Fluorescent							
	Frame-In Kit Ceiling Type Lamping Height		Height	Frame-In Kit	Ceiling Type	Lamping	Height					
	1000P1 1002P1	Non-IC Non-IC	75W A19	6 3/4" 6 3/4"	1001F13U Series	Uniframe™ Non-IC	(1) Quad 13W (G24q-1)	5 7/8"				
1021 Opal	1003R	Non-IC Remodeler			1001F18U Series	Uniframe [™] Non-IC	(1) Quad 18W (G24q-2)	5 7/8"				
1 021	1000IC 1000AICM 1004ICX/N											
	1004IC/N	Non-IC	40W A19 7 1/2"		1001F13ICU/N	Performance IC	(1) Quad 13W (G24q-1)	7 1/4"				
	1004ICR	Non-IC Remodeler		7 1/2"	1001F18ICU/N	Performance IC	(1) Quad 18W (G24q-2)	7 1/4"				

Features

- Reflector: Hydroformed aluminum, .040" thick (18 ga.); Anobrite™ (anodic-processed) semi-specular finish for permanent reflectivity.
- Diffuser: Pressed and blown 3-layer cased opal glass; twists tight into reflector trim. Neoprene (captive on flange of reflector) seals unit under pressure of twist lock. Concealed wire-hinge supports glass enclosure for servicing.
- 3. Frame-In Kit: (1002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

Options & Accessories

Retaining Clips: 1955 - For installing in existing ceiling.

Lahels

UL (Suitable for Wet Locations - covered ceiling, showers, spas), I.B.E.W.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • M0608




LIGHTOLIER®

Page 2 of 2

5" Aperture Opal Disk Diffuser Reflector Trim ROOM SURFACE REFLECTANCES: 1009 Colling 50% Walls: 20% Floor

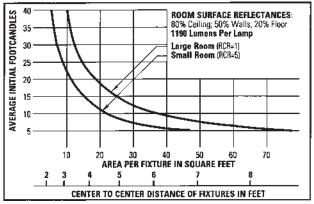


Use quick calculator chart to determine the spacing of 75W A19 units for a desired level of illumination.

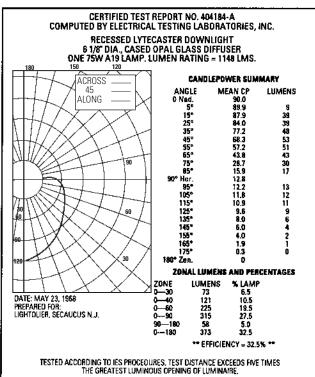


l	COEFFICIENTS OF UTILIZATION																
I			% EFFECTIVE CEILING CAVITY REFLECTANCE														
ı		l	80 70 j			50			30			10			0		
ı							%1	WALL REFLECTA			NCE			Ī			
Į		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0.
ł	1	.32	.31	.29	.31	.30	.28	.29	.28	.27	.27	.26	.25	.25	.24	.23	.22
ı	<u>□</u> ?	.28	.25	.24	.27	.25	.23	.25	.23	.22	.23	.22	.21	.21	.20	.19	.18
ı	RATED X	.25	.22	.20	.24	.21	.19	.22	.20	.18	.20	.19	.17	.19	.18	.16	.15
1		.21	.19	.17	.22	.18	.16	.20	,17	.16	.18	.16	.15	.17	.15	.14	.13
1	5 5	.19	.16	.14	.19	.16	.14	.17	.15	.13	.16	.14	.13	.15	.13	.12	.11
l	CAVIT 6	.17	.14	.12	.17	.14	.12	.15	.13	.11	.14	.12	.11	.14	.12	.10	.10
ı	<u>⊋</u> 7	.15	.12	.10	.15	.12	.10	.14	.11	.10	.13	.11	.09	.12	.10	.09	.08
ı	8 8 9 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	.14	.11	.09	.13	.11	.09	.13	.10	.09	.12	.10	.08	.11	.09	.08	.07
Ī	œ 9	.12	.10	.08	.12	.10	.08	.11	.09	.08	.11	.09	.07	.10	.08	.07	.06
١	10	,1 1	.09	.07	.11	.09	.07	.10	.08	.07	.10	.08	.06	.09	.07	.06	.06
l	20% FLOOR CAVITY REFLECTANCE																

To convert lighting data for a lower wattage incandescent lamp of the **same type**, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.

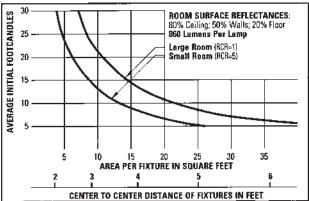

Use quick calculator chart to determine the spacing of 1 Lt. 13 Watt Quad Tube for a desired level of illumination.

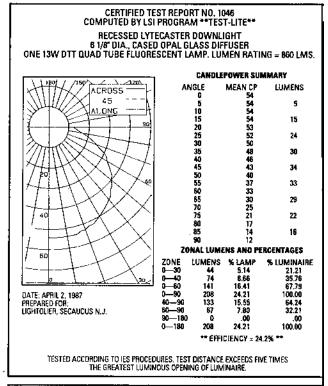

	COEFFICIENTS OF UTILIZATION															
ĺ	% EFFECTIVE CEILING CAVITY REFLECTANCE															
1	80			70			50			30			10			0
1						%	WALL	WALL REFLECTA								
l _	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	_0
1	.25	.23	.22	.24	.23	.22	.23	.22	.21	.22	.21	.21	.21	.21	.20	.20
2 2	.21	.20	.18	.21	.19	.18	.20	.19	.17	.19	.18	.17	.18	.17	.17	.16
BATIO 4	.19	.16	.15	.18	.16	.15	.17	.16	.14	.17	.15	.14	.16	.15	.14	.13
 ⊊ 4	.16	.14	.13	.16	.14	.12	.16	,14	.12	.15	.13	.12	.14	.13	.12	.11
∖ 5	.15	.12	.11	.14	.12	.11	.14	.12	.10	.13	.12	.10	.13	.11	.10	.10
CAVITY 9	.13	.11	.09	.13	.11	.09	.12	.10	.09	.12	.10	.09	.11	.10	.09	.08
NO 8	.12	.09	.08	.11	.09	.08	.11	.09	.08	.11	.09	.08	.10	.09	.08	.07
88	.10	.08	.07	.10	.08	.07	.10	.08	.07	.10	.08	.07	.09	.08	.07	.06
F 9	.10	.07	.06	.09	.07	.06	.09	.07	.06	.09	.07	.06	.09	.07	.06	.05
10	.09	.07	.05	.08	.07	.D5	.08	.06	.05	.08	.06	.05	.08	.06	.05	.05
					20%	FLO0	OR CA	VITY	REFLE	CTAN	NCE					

Lab Judanii attau	T
Job Information	Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • M0608

