


Halolite Versatile Mini Halogen Floodlight 多用途小型投光灯具


QVF133/135/137/139

Installation Instruction 安装说明




Type 型号	Vol./ Fre. 电压/频率	Lamp 光源	Lampholder 灯座	Weight 重量 (kg)
QVF133 HAL-TDS150W K BK CN	220V/50Hz	PLUS PRO C 150W R7s	R7s	0.5
QVF135 HAL-TDS500W K BK CN	220V/50Hz	PLUS PRO S 500W R7s	R7s	1.0
QVF137 HAL-TDL1000W K BK CN	220V/50Hz	PLUS PRO L 1000W R7s	R7s	1.75
QVF139 HAL-TDL1500W K BK CN	220V/50Hz	PLUS PRO L 1500W R7s	R7s	2.75

Type 型号	Windage area 迎风面积 (mm ²)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)
QVF133	0.014	139	98	108	52	Dia 6.5	2×Dia 5	190	95
QVF135	0.027	185	148	138	70	Dia 10.5	2×Dia 8	265	122
QVF137	0.054	274	200	168	110	Dia 12	2×Dia 8.5	298	135
QVF139	0.076	345	225	228	187	Dia 12	2×Dia 8.5	365	175

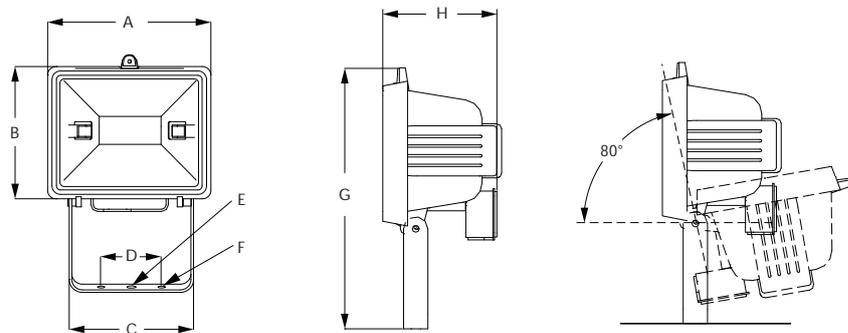

Safety Notes/ 安全事项:

- Switch off electricity supply (mains) before installation or maintenance;
安装或维修时，请切断电源；
- Do not touch lamp with bare hands at any time;
使用时，禁止不用灯罩，触摸灯泡，以免灼伤；
- In case of glass breakage, arrange to replace the broken panel by an toughened front glass, then connect power;
必须在接通电源之前使用钢化玻璃更换破损的玻璃；
- Kindly keep the minimum distance between luminaire and matters 1m;
光源与照明体的空间距离最少保持1米；
- The fitting is electrically insulated, according to IEC60598, classification I.
External earthing is therefore required. Detailed cable connecting diagram is shown below.
本灯具必须接地线，以确保安全（见下图）。

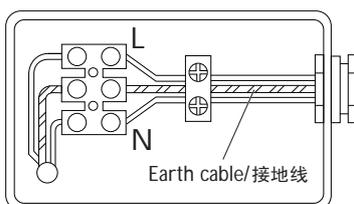

Philips Lighting Luminaires (Shanghai) Co., Ltd.
Address: No. 2688, Huyi Road, Jiading, Shanghai, China
Postalcode: 201801

飞利浦灯具（上海）有限公司
地址：中国上海市嘉定区马陆镇沪宜公路2688号
邮编：201801


PHILIPS

Important notices/ 注意事项:

- Please read through the instruction manual before using the product;
使用前请先阅读本说明书;
- During installation, please refer to relevant local standards for electrical product or consult qualified electricians for guidance;
安装时请参照有关国际电器安装手册或咨询有关电器技师之指引;
- Please retain this manual for future reference;
请保留本说明书作日后参考;
- The manufacturer is not responsible for damages resulting from mis-handling and/or unauthorized modification of the product.
所有不当使用而导致损坏或经自行更改的产品, 生产商不负任何责任。

Installation application instructions/ 安装操作使用说明

- Fitting is suitable for both indoor & outdoor installation;
室内室外都可以安装使用;
- Recommended maximum ambient temperature: 25 °C for indoor & 35 °C for outdoor;
使用时的最大环境温度: 室内25 °C, 室外35 °C;
- Keep the lamp horizontal: $\pm 2^\circ$;
工作时光源应水平: $\pm 2^\circ$;
- Fitting is not suitable for installing on combustible material;
灯具不适合安装在可燃物上;
- Fitting is suitable for upward aiming;
灯具适用于仰视泛光照明;
- Kindly keep the minimum distance from walls (See below diagrams).
请与墙壁保持最小距离 (见下图)

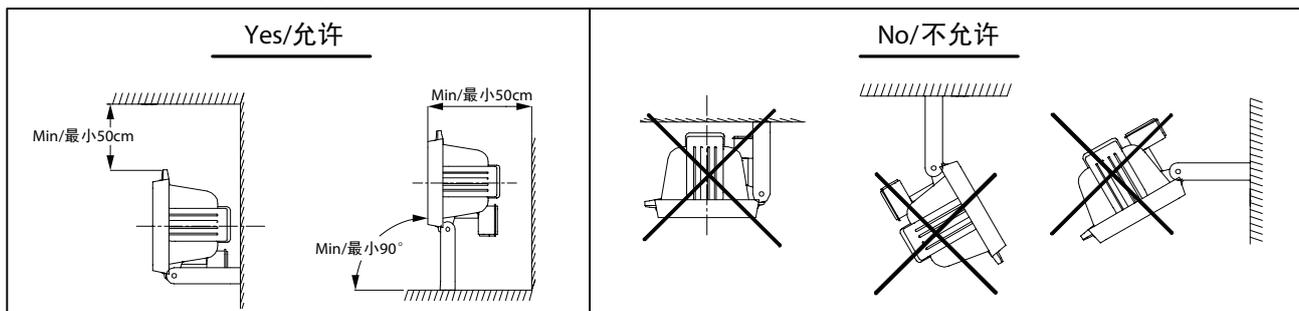

Advantage/ 特征:

- A high quality reflector system for wide beam light distribution;
高质量铝反射器, 具有宽光反射系统;
- Weatherproof rating according to IP54;
防水防尘等级到达IP54;
- Suitable for a wide range of application.
使用性广。

Applications/ 使用场所:

- Facades建筑泛光
- Gardens/公园
- Play Yards/游乐场所
- Billboards广告牌
- Security Lighting安全照明
- Recreational Areas/休闲场所

Suit for/符合国标:

GB7000.1; GB7000.7

Free charge service line:

8008201201(Only for China)

顾客免费热线: 8008201201

(限中国大陆地区)

用户资料

用户姓名: _____ 身份证号码: _____
地 址: _____
联系电话: _____ 邮政编码: _____
产品名称: _____ 产品型号: _____
出售单位及地址: _____
购买日期: 年 月 日 发票号码: _____

飞利浦照明

上海办事处 上海市沪宜公路1805号 电话: 021-59151088 传真: 021-59151804 邮政编码: 201801	西安办事处 西安市南大街30号中大国际508室 电话: 029-87203516 传真: 029-87203633 邮政编码: 710002
北京办事处 北京建国门内大街华润大厦16层 电话: 010-65172288 传真: 010-65181203 邮政编码: 100005	成都办事处 成都市人民南路2段11信大厦28层 电话: 028-86199799 传真: 028-86200703 邮政编码: 610016
广州办事处 广州市越秀区中山三路33号 中华国际中心B塔18楼 电话: 020-83141682 传真: 020-83777543/83777542 邮政编码: 510055	武汉办事处 武汉市汉口建设大道568号 新世界国贸大厦35层02-03室 电话: 027-85560332 传真: 027-85793397 邮政编码: 430022
沈阳办事处 沈阳市和平区南京北街206号 城市广场第一座11层1103室 电话: 024-23341635 传真: 024-23341632 邮政编码: 110001	南京办事处 南京市汉中路2号 金陵饭店世界贸易中心6楼 电话: 025-86565888 传真: 025-84718215 邮政编码: 210005

仅限中国大陆地区

飞利浦灯具产品 专用说明书 保修条例

本公司保证该产品在正常使用及保养下能发挥其优越性能, 同时本公司将为持证用户提供一年之保修服务 (不含光源)。

1 自购买日起一年内, 凡经本公司维修人员确认为正常使用情况下因制造工艺或材料而导致的故障及损坏, 您都将获得免费上门服务保修服务;

2 此免费保修服务包括附件、辅助装置、运输费及维修人员上门服务费;

3 维修时, 保修证及发票正本或其他有效凭证同时使用方为有效;

4 以下情况将不能享受免费服务:

- 1) 接不适当电源, 使用不适当之安装而造成的损坏;
- 2) 非经本公司认可之维修和改装而造成的损坏;
- 3) 错误或疏忽使用或不适当配件而造成的损坏;
- 4) 因运输及其他意外而造成的损坏;
- 5 此证若经涂改即作废;
- 6 此证仅限在中国境内使用有效。

顾客热线: 8008201201

飞利浦灯具 (上海) 有限公司

仅限中国大陆地区