

PHILIPS

Starter kit E27

Hue White Ambiance

3 x E27 Bulb

Warm to cool white light

Dimmer switch included

Hue Bridge included



8718696728925



Light for your moments

Get the right light for your daily activities with the Philips Hue Starter kit. It includes three E27 smart lamps, the Hue Bridge and the dimmer switch. Set it to cool light to get energised or warm tones to unwind at the end of the day.

Limitless possibilities

- Get in the mood with warm to cool white smart lights
- Away-from-home smart light control
- Enjoy the right smart lighting for daily tasks
- Smart lights to wake you up and help you sleep
- Smart home automation hub: Hue Bridge
- Control lights with your voice
- Wireless control with included dimmer switch



Highlights

Get in the mood



Use over 50,000 shades of warm to cool white light to put you in the mood to work, play, or relax — no matter what time of day it is. Start your morning off on the right foot with cool, energising bright white light, or settle down for the night with golden tones.

Control lights away from home



The Philips Hue app gives you complete control over your lights, even if you're not at home. Switch your lights off and on remotely using just the app to ensure your home is always lit the way you want it.

Smart lighting for daily tasks



Make your day easier with four preset light scenes that have been handcrafted for your daily tasks. Two cool-toned scenes, Energise and Concentrate, help you get going in the morning and keep your focus, while the warmer scenes of Read and Relax help you enjoy a good book and a rested mind.

Wake up and sleep




Set your lights to slowly brighten in the morning at a pre-set time to mimic sunrise and help you start your day feeling calm and refreshed. In the evening, the relaxing warm white lights will help you unwind, relax and prepare your body for a good night's sleep.

The Hue Bridge



The Hue Bridge is an essential component to a personal Philips Hue smart lighting system. It is the brains of the operation, communicating with both your smart light lamps and the Hue app to ensure that everything works together. It also enables smart home automation features like scheduling routines and timers.

Control with your voice

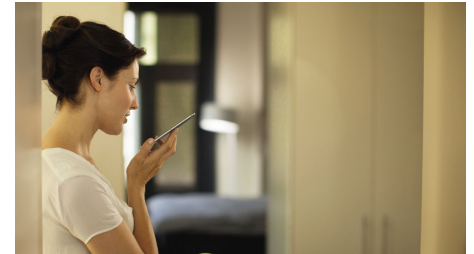

When connected to the Hue Bridge, you can pair your lights with Alexa, Apple HomeKit, and the Google Assistant and control your lights using just your voice. Simple voice commands let you turn your lights on and off, dim or brighten your lights, and even set a light scene.

Wireless control



With the battery-powered dimmer switch, you can control up to 10 smart lights simultaneously. The switch – which can be removed from its wall mount and used as a remote control – allows you to dim and brighten your lights or cycle through four preset light recipes

Specifications

Lamp dimensions

- Dimensions (WxHxD): 110*61

Environmental

- Operational humidity: 5% <H<95% (non-condensing)
- Operational temperature: 0°C – 40°C

Guarantee

- 2 years: Yes

Power consumption

- Energy efficiency label (EEL): A+

Service

- Warranty: 2 year(s)

Technical specifications

- Weight: 78
- Bulb technology: LED

The Bridge

- Frequency band: 2400~2483.5 MHZ
- Height: 26 mm
- Length X Width: 88 x 88 mm
- Max. number of accessories: 12
- Max. number of bulbs: 50
- Mounting options: Wall
- Power adapter: 100–240 V AC / 50–60 Hz
- Power consumption: 250mA max
- Height: 1 in
- Length X Width: 3.5 x 3.5 in

The bulb

- Colour temperature: 2200K–6500K
- Diameter: 62 mm
- Energy efficiency label: A+
- Fitting: E27
- Form factor: A60
- Height: 110 mm
- Input voltage: 220V–240V
- Lifetime: 25,000 h
- Light output: Warm white to cool daylight
- Lumen output: 806 lm
- Max. operation power: 9.5 W
- Max. standby power: 0,1 W
- Number of switching cycles: 50,000
- Power factor: >0.5
- Rated lifetime: 25,000 h
- Software upgradable: Yes
- Start up: Instant 100% light output
- Wattage: 9.5 W
- Wattage equivalent: 60 W
- Communication protocol: Zigbee
- Software upgradable: When connected to Hue Bridge

The switch

- Batteries included: 1 x CR2450
- Frequency band: 2400-2483,5 MHz
- IP rating: 20
- Lifetime: 50.000 clicks
- Max. lights per switch: 10 if not linked to Hue bridge
- Minimal battery lifetime: 3 a
- Mounting options: freestanding
- Range: 15-30m
- Special features: Not applicable
- Switch depth: 11 mm
- Switch height: 117 mm
- Switch width: 35 mm
- Wall plate depth: 114 mm
- Wall plate height: 14 mm
- Wall plate width: 70 mm
- Weight including wall plate: 67 g
- Weight of switch: 37 g
- Zigbee Light link: IEEE 802.15.4 Protocol

- Minimal range indoor: 500 in

What's in the box

- Bridge: Yes
- Ethernet network cable: 1
- Hue bulbs: 3
- Hue dimmer switch: 1
- Power adapter: 1

What's supported

- HomeKit compatible: Yes
- IOS: Yes
- iPad Mini: No
- iPhone: Yes
- iPod Touch: No
- Philips Hue App: Android 7.0 and later
- Voice assistants: Amazon Alexa



Issue date: 2023-11-08
Version: 0.729

© 2023 Signify Holding. All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com