



# The right fit for your high-output applications

## Centium T5HO

No matter what the conditions require, operating at a variety of line voltages between 120V to 480V, whether located in high ambient temperature environments (requiring a 90° C rating) or not, our family of Philips Advance Centium ballasts are ideal for a wide variety of applications.

### 优点

- Programmed Start Operation - Helps to extend lamp life in frequent switching applications such as occupancy sensors or daylight harvesting
- Starting Capability at -20F - Suited for cold temperature applications (54W models only)
- High-Low Switching - One ballast can easily switch from 4-lamp to 2-lamp fixtures

### 特点

- IntelliVolt Technology (120-277V)
- Lamp EOL Protection
- UL Type CC rated - Anti-arcing circuitry provides greater flexibility to meet end-user application requirements

### 应用


- Retail, commercial, institutional and industrial applications including: schools, offices, specialty & department stores, warehouses and manufacturing

# Centium T5HO

## Versions



## 二维绘图

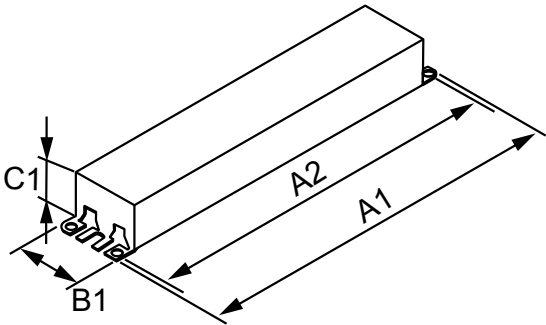

运营和电气	
输入频率	50 至 60 岁 Hz
美国总谐波变形	10 %

Product	A1	A2	B1	C1
CENTIUM HCN2S5490CWL35M	16.70 in	16.34 in	1.18 in	1.00 in
CENTIUM ICN2S5490CN35M	9.50 in	8.90 in	1.30 in	1.00 in
CENTIUM ICN2S39N35M	9.50 in	8.90 in	1.30 in	1.00 in
CENTIUM ICN4S5490C2LSG35M	16.70 in	16.34 in	1.70 in	1.18 in
CENTIUM HCN4S5490C2LSG35M	16.70 in	16.34 in	1.70 in	1.18 in

## 运营和电气

Order Code	Full Product Name	输入电压
913701246102	CENTIUM ELE BALLAST (2) F54/T5HO 120-277V	120-277 V
913701248802	CENTIUM ELE BALLAST (2) F39T5/HO 120-277V	120-277 V
913710268502	CENTIUM ELE BALLAST (4) F54T5HO 120-277V	120-277 V

Order Code	Full Product Name	输入电压
913710268702	CENTIUM ELE BALLAST (4) F54T5/HO 347-480V	347-480 V
913710845202	CENTIUM ELE BALLAST (2) F54T5/HO 347-480V	347-480 V

## 基本信息

Order Code	Full Product Name	灯具数量	灯具类型
913701246102	CENTIUM ELE BALLAST (2) F54/T5HO 120-277V	1/2 件/单位	F54T5/HO
913701248802	CENTIUM ELE BALLAST (2) F39T5/HO 120-277V	1/2 件/单位	F39T5/HO
913710268502	CENTIUM ELE BALLAST (4) F54T5HO 120-277V	3/4 件/单位	F54T5/HO

Order Code	Full Product Name	灯具数量	灯具类型
913710268702	CENTIUM ELE BALLAST (4) F54T5/HO 347-480V	3/4 件/单位	F54T5/HO
913710845202	CENTIUM ELE BALLAST (2) F54T5/HO 347-480V	1/2 件/单位	F54T5/HO

## 机械和壳体

Order Code	Full Product Name	外壳
913701246102	CENTIUM ELE BALLAST (2) F54/T5HO 120-277V	N

Order Code	Full Product Name	外壳
913701248802	CENTIUM ELE BALLAST (2) F39T5/HO 120-277V	N

# Centium T5HO

Order Code	Full Product Name	外壳
913710268502	CENTIUM ELE BALLAST (4) F54T5HO 120-277V	G
913710268702	CENTIUM ELE BALLAST (4) F54T5/HO 347-480V	G

Order Code	Full Product Name	外壳
913710845202	CENTIUM ELE BALLAST (2) F54T5/HO 347-480V	L

