



Application flexibility

Transformers

Stepdown transformers and autotransformers are used when you need to connect a lower voltage device to a higher voltage source.

Benefits

- Available in the most common voltages
- Linear transformer design operates cooler than a ballast


Features

- Uses Class H (180°C) insulation
- Convenient J-Box cover w/thermal protector available for some transformers

Application

- High bay retail, manufacturing, gymnasiums, warehouses, parking structures, outdoor



Versions



71A9741600

Transformers

Dimensional drawing

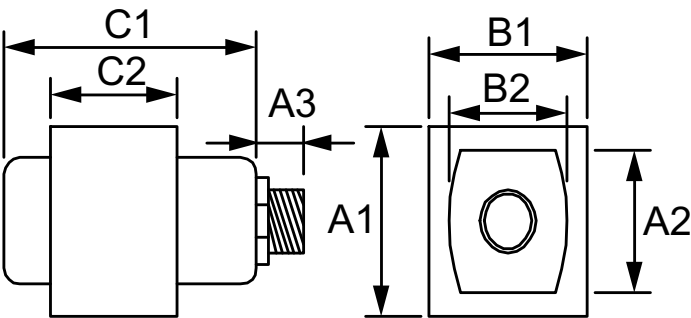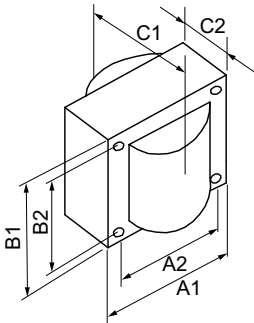

Operating and Electrical	
Input Frequency	60 Hz

Operating and Electrical

Order Code	Full Product Name	Input Voltage
71A9741600	AUTO-TRANSFORMER AUTOXFMR 277:115 300VA C&C	277:120 or 120:277 V
71A9741600J	AUTO-TRANSFORMER AUTOXFMR 277:115 300VA JBOX	277:120 or 120:277 V
71A9743600C	AUTO-TRANSFORMER ISOXFMR 120:11.5V 75W C&C	120:12 V

Mechanical and Housing

Order Code	Full Product Name	Housing
71A9741600	AUTO-TRANSFORMER AUTOXFMR 277:115 300VA C&C	NA
71A9741600J	AUTO-TRANSFORMER AUTOXFMR 277:115 300VA JBOX	Coil cover wtih 1-2 NIP
71A9743600C	AUTO-TRANSFORMER ISOXFMR 120:11.5V 75W C&C	NA

Product	C1	C2	A1	A2	B1	B2
AUTO-TRANSFORMER AUTOXFMR 480:277 350VA C&C	3.6 in	2.35 in	2.6 in	2.2 in	2.2 in	1.8 in
AUTO-TRANSFORMER ISOXFMR 120:11.5V 75W C&C	2.8 in	1.5 in	2.6 in	2.2 in	2.2 in	1.8 in
AUTO-TRANSFORMER AUTOXFMR 277:115 300VA C&C	3.5 in	2 in	2.6 in	2.2 in	2.2 in	1.8 in

Product	C1	C2	A1	A2	B1	B2
AUTO-TRANSFORMER AUTOXFMR 347:120/277 395VA JBOX	4.7 in	2.7 in	2.63 in	1.81 in	2.19 in	1.84 in
AUTO-TRANSFORMER AUTOXFMR 277:115 200VA JBOX	4.2 in	2.2 in	2.63 in	1.81 in	2.19 in	1.84 in
AUTO-TRANSFORMER AUTOXFMR 277:115 300VA JBOX	4 in	2 in	2.63 in	1.81 in	2.19 in	1.84 in

Order Code	Full Product Name	Input Voltage
71A9839600J	AUTO-TRANSFORMER AUTOXFMR 277:115 200VA JBOX	277:120 V
71A9862600J	AUTO-TRANSFORMER AUTOXFMR 347:120/277 395VA JBOX	347:(120/277) V
71A9843600	AUTO-TRANSFORMER AUTOXFMR 480:277 350VA C&C	347:190 or 480:270 V

Order Code	Full Product Name	Housing
71A9839600J	AUTO-TRANSFORMER AUTOXFMR 277:115 200VA JBOX	Coil cover wtih 1-2 NIP
71A9862600J	AUTO-TRANSFORMER AUTOXFMR 347:120/277 395VA JBOX	Coil cover wtih 1-2 NIP
71A9843600	AUTO-TRANSFORMER AUTOXFMR 480:277 350VA C&C	NA

