



For every project where light really matters, easy to install and maintain

CoreLine Waterproof

CoreLine waterproof delivers on the CoreLine promise of innovative, easy-to-use and high-quality luminaires. With its slim and stylish design, it retains the product architecture that the range is well-known and appreciated for. Installation is quick and easy, all thanks to its efficient design. CoreLine waterproof provides better wide-beam light distribution for straightforward and effective lighting. A direct replacement for traditional waterproof luminaires with fluorescent lamps ranging from 18W up to 58W, it delivers significant energy savings. Interact Ready luminaires with integrated wireless communications are also available in the CoreLine waterproof range, ready to be used with Interact connected lighting system.

Benefits

- Saves on energy and maintenance costs
- Supports fast and flexible installation thanks to smart WT120C G2 product architecture
- Ideal for general application projects with a robust design (IK08) and high water and dust-proof rating (IP65)

CoreLine Waterproof

Features

- Long lifetime and high efficiency: 50,000 hours with flux at 80% min. compared to initial level and efficiency up to 140lm/W
- Range of options available: L600/1200/1500, up to 8000 lm, 4000K
- Uniform and wide-beam or opal light distribution
- Longer sliders, faster lock opening, tool-less electrical connections for easy and flexible installation
- Optional controls and versions available: DALI dimming, integrated wireless connectivity (Interact Ready), integrated movement sensors (MDU), emergency lighting (EL), waterproof external connector for easier installation (WEC), through wiring 1- and 3-phase (TW1/

Application

- Parking Garages
- Manufacturing
- Warehouses
- General lighting

Warnings and Safety

- UV radiation will damage the material over time resulting in loss of waterproof sealing and IP66 rating.
- Do not install the luminaire in locations where it will be exposed to direct sunlight.


Versions



CoreLine waterproof All in L1500


CoreLine waterproof All in L1200

Dimensional drawing

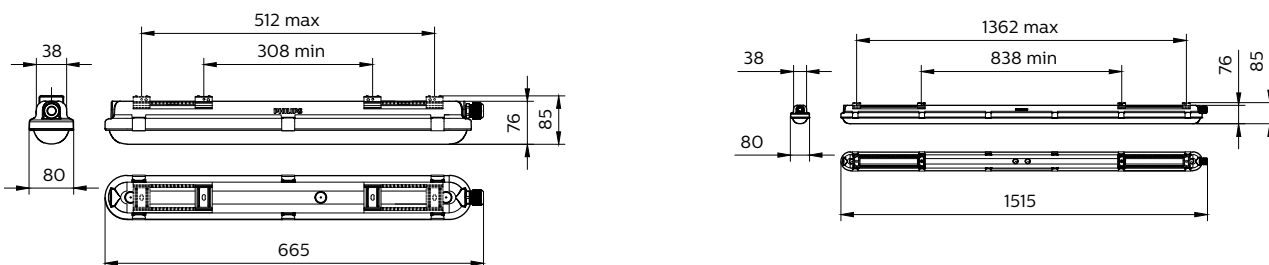

CoreLine Waterproof

Dimensional drawing

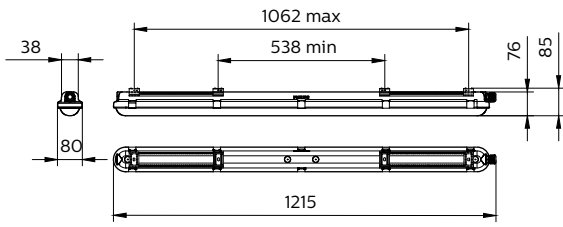


Product details



CoreLine waterproof All in L1500



CoreLine Waterproof WT120C G2 PCU-7DPP

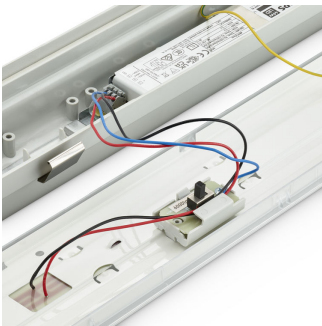

CoreLine waterproof All in, WT120C G2, easy lumen switch



CoreLine Waterproof WT120C G2 PCU-3DPP



CoreLine Waterproof WT120C G2 PCU-10DPP




CoreLine Waterproof WT120C G2 PCU-9DPP

CoreLine Waterproof

Product details




CoreLine Waterproof WT120C G2
PCU-12DPP

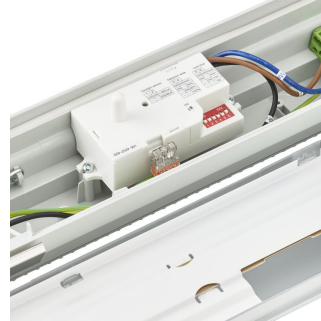


CoreLine waterproof G2 (WT120C
G2),MDU, Motion Detection Unit



CoreLine waterproof All in L1500




CoreLine Waterproof WT120C G2
PCU-2DPP



CoreLine Waterproof WT120C G2
PCU-13DPP



CoreLine Waterproof WT120C G2
PCU-8DPP



CoreLine waterproof G2 (WT120C
G2),MDU, Motion Detection Unit



CoreLine Waterproof WT120C G2
PCU-11DPP

CoreLine Waterproof

Product details

CoreLine waterproof G2 (WT120C G2), Emergency lighting, TrustSight



General Information

| | |
|--------------------------|-----------------------------------|
| CE mark | CE mark |
| Driver included | Yes |
| ENEC mark | ENEC mark |
| Glow-wire test | Temperature 850 °C, duration 30 s |
| Light source replaceable | No |
| Number of gear units | 1 unit |

Light Technical

| | |
|---|-----|
| Color rendering index (CRI) | >80 |
| Flickering value (PstLM) - Flickering value as per EN 61000-3-3 | 1 |

Operating and Electrical

| | |
|----------------|-------------|
| Line Frequency | 50 or 60 Hz |
|----------------|-------------|

Approval and Application

| | |
|------------------------------|----------------|
| Protection class IEC | Safety class I |
| Mech. impact protection code | IK08 |
| Ingress protection code | IP65 |

Initial Performance (IEC Compliant)

| | |
|-------------------------|--------|
| Luminous flux tolerance | +/-10% |
|-------------------------|--------|

General Information (1/2)

| Order Code | Full Product Name | Type of emergency lighting battery | Flammability mark | Lamp family code | Embedded control |
|--------------|--|------------------------------------|---|------------------|------------------------------------|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | - | For mounting on normally flammable surfaces | - | - |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | - | For mounting on easily flammable surfaces | LED27S | - |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | - | For mounting on easily flammable surfaces | LED27S | Movement and light sensor (On/Off) |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | - | For mounting on easily flammable surfaces | LED27S | Movement and light sensor (On/Off) |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | Lithium | For mounting on easily flammable surfaces | LED27S | - |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | - | For mounting on easily flammable surfaces | LED27S | - |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | Lithium | For mounting on easily flammable surfaces | LED27S | - |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | - | For mounting on easily flammable surfaces | LED40S | - |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | - | For mounting on easily flammable surfaces | LED40S | Movement and light sensor (On/Off) |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | - | For mounting on easily flammable surfaces | LED40S | Movement and light sensor (On/Off) |
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | - | For mounting on easily flammable surfaces | LED40S | - |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | - | For mounting on easily flammable surfaces | LED40S | - |

| Order Code | Full Product Name | Type of emergency lighting battery | Flammability mark | Lamp family code | Embedded control |
|--------------|---|------------------------------------|---|------------------|------------------------------------|
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | - | For mounting on easily flammable surfaces | LED40S | - |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | Lithium | For mounting on easily flammable surfaces | LED40S | - |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | Lithium | For mounting on easily flammable surfaces | LED40S | Movement and light sensor (On/Off) |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | Lithium | For mounting on easily flammable surfaces | LED40S | - |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | - | For mounting on easily flammable surfaces | - | - |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | Lithium | For mounting on easily flammable surfaces | - | - |
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | - | For mounting on easily flammable surfaces | - | - |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | - | For mounting on easily flammable surfaces | - | - |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | - | For mounting on easily flammable surfaces | - | - |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | - | For mounting on easily flammable surfaces | - | - |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | - | For mounting on easily flammable surfaces | - | - |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | - | For mounting on easily flammable surfaces | - | - |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | - | For mounting on easily flammable surfaces | - | - |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | - | For mounting on easily flammable surfaces | - | - |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | - | For mounting on easily flammable surfaces | - | - |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | - | For mounting on easily flammable surfaces | - | - |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | - | For mounting on easily flammable surfaces | - | - |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | - | For mounting on easily flammable surfaces | - | - |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | - | For mounting on normally flammable surfaces | - | - |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | - | For mounting on easily flammable surfaces | LED27S | Movement and light |

| Order Code | Full Product Name | Type of emergency lighting battery | Flammability mark | Lamp family code | Embedded control |
|--------------|---|------------------------------------|---|------------------|------------------------------------|
| | | | | | sensor (On/Off) |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | - | For mounting on easily flammable surfaces | LED19S | - |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | - | For mounting on easily flammable surfaces | - | - |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | - | For mounting on easily flammable surfaces | - | - |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | - | For mounting on easily flammable surfaces | LED34S | - |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | - | For mounting on easily flammable surfaces | LED34S | Movement and light sensor (On/Off) |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | - | For mounting on easily flammable surfaces | LED34S | Movement and light sensor (On/Off) |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | - | For mounting on easily flammable surfaces | LED34S | - |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | Lithium | For mounting on easily flammable surfaces | LED34S | - |
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | Lithium | For mounting on easily flammable surfaces | LED34S | Movement and light sensor (On/Off) |
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | Lithium | For mounting on easily flammable surfaces | LED34S | - |
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | - | For mounting on easily flammable surfaces | LED60S | - |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | - | For mounting on easily flammable surfaces | LED60S | Movement and light sensor (On/Off) |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | - | For mounting on easily flammable surfaces | LED60S | Movement and light sensor (On/Off) |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | - | For mounting on easily flammable surfaces | LED60S | - |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | - | For mounting on easily flammable surfaces | LED60S | - |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | - | For mounting on easily flammable surfaces | LED60S | - |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | Lithium | For mounting on easily flammable surfaces | LED60S | - |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | Lithium | For mounting on easily flammable surfaces | LED60S | Movement and light |

| Order Code | Full Product Name | Type of emergency lighting battery | Flammability mark | Lamp family code | Embedded control |
|--------------|-------------------------------------|------------------------------------|---|------------------|------------------------------------|
| | | | | | sensor (On/Off) |
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | Lithium | For mounting on easily flammable surfaces | LED60S | - |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | - | For mounting on easily flammable surfaces | LED80S | - |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | - | For mounting on easily flammable surfaces | LED80S | Movement and light sensor (On/Off) |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | - | For mounting on easily flammable surfaces | LED80S | - |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | Lithium | For mounting on easily flammable surfaces | LED80S | - |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | - | For mounting on easily flammable surfaces | - | - |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | Lithium | For mounting on easily flammable surfaces | - | - |
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | - | For mounting on easily flammable surfaces | - | - |
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | - | For mounting on easily flammable surfaces | - | - |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | Lithium | For mounting on easily flammable surfaces | - | - |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | - | For mounting on easily flammable surfaces | - | - |
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | - | For mounting on easily flammable surfaces | - | - |
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | - | For mounting on easily flammable surfaces | - | - |

CoreLine Waterproof

| Order Code | Full Product Name | Type of emergency lighting battery | Flammability mark | Lamp family code | Embedded control |
|--------------|-----------------------------------|------------------------------------|---|------------------|------------------|
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | - | For mounting on easily flammable surfaces | - | - |

General Information (2/2)

| Order Code | Full Product Name | Product family code | Service tag | Order Code | Full Product Name | Product family code | Service tag |
|--------------|---|---------------------|-------------|--------------|---|---------------------|-------------|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | - | No | 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | WT130C | Yes |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | WT130C | Yes | 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | WT130C | Yes |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | WT130C | Yes | 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | WT130C | Yes |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | WT130C | Yes | 910505100061 | WT120C G2 LED34S/840 PSD L1500 | WT130C | Yes |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | WT130C | Yes | 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | WT130C | Yes |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | WT130C | Yes | 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | WT130C | Yes |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | WT130C | Yes | 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | WT130C | Yes |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | WT130C | Yes | 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | WT130C | Yes |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | WT130C | Yes | 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | WT130C | Yes |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | WT130C | Yes | 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | WT130C | Yes |
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | WT130C | Yes | 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | WT130C | Yes |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | WT130C | Yes | 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | WT130C | Yes |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | WT130C | Yes | 910505100072 | WT120C G2 LED60S/840 PSD L1500 | WT130C | Yes |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | WT130C | Yes | 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | WT130C | Yes |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | WT130C | Yes | 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | WT130C | Yes |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | WT130C | Yes | 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | WT130C | Yes |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | WT130C | - | 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | WT130C | Yes |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | WT130C | - | 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | WT130C | Yes |
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | WT130C | - | 910505100079 | WT120C G2 LED80S/840 PSD L1500 | WT130C | Yes |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | - | - | 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | WT130C | Yes |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | - | - | 910505101271 | WT120C G2 LED65S/840 WIA L1500 | WT130C | - |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | - | Yes | 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | WT130C | - |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | - | Yes | 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | WT130C | - |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | - | - | 910505103013 | WT120C G2 LED80S/840 WIA L1500 | WT130C | - |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | - | - | 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | WT130C | - |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | - | No | 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | WT130C | - |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | - | No | 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | - | - |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | - | Yes | 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | - | - |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | - | Yes | 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | - | - |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | - | Yes | 911401823680 | WT120C G2 LED34S/840 PSU L1500 | - | Yes |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | - | Yes | 911401823880 | WT120C G2 LED60S/840 PSU L1500 | - | Yes |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | - | Yes | 911401823980 | WT120C G2 LED80S/840 PSU L1500 | - | Yes |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | - | Yes | 911401824481 | WT120C G2 LED34S/865 PSU L1500 | - | - |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | - | No | 911401824581 | WT120C G2 LED60S/865 PSU L1500 | - | - |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | WT130C | Yes | 911401824781 | WT120C G2 LED55S/830 PSU L1500 | - | - |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | WT130C | Yes | 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | - | No |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | - | Yes | 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | - | No |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | - | No | | | | |

CoreLine Waterproof

| Order Code | Full Product Name | Product | |
|--------------|-----------------------------------|-------------|-------------|
| | | family code | Service tag |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | - | No |

Light Technical (1/2)

| Order Code | Full Product Name | "All-in" Type | Correlated Color | Luminous Efficacy | Luminous Flux |
|--------------|--|----------------------|-------------------|-------------------|---------------|
| | | | Temperature (Nom) | (rated) (Nom) | (Nom) |
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | "All-in" Multi Lumen | 4000 K | 140 lm/W | 3,700 lm |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | - | 4000 K | 126 lm/W | 2,700 lm |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | - | 4000 K | 123 lm/W | 2,700 lm |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | - | 4000 K | 123 lm/W | 2,700 lm |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | - | 4000 K | 104 lm/W | 2,700 lm |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | - | 4000 K | 123 lm/W | 2,700 lm |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | - | 4000 K | 100 lm/W | 2,700 lm |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | - | 4000 K | 133 lm/W | 4,000 lm |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | - | 4000 K | 131 lm/W | 4,000 lm |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | - | 4000 K | 133 lm/W | 4,000 lm |
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | - | 4000 K | 138 lm/W | 4,000 lm |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | - | 4000 K | 136 lm/W | 4,000 lm |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | - | 4000 K | 131 lm/W | 4,000 lm |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | - | 4000 K | 121 lm/W | 4,000 lm |

| Order Code | Full Product Name | "All-in" Type | Correlated Color | Luminous Efficacy | Luminous Flux |
|--------------|---|---------------|-------------------|-------------------|---------------|
| | | | Temperature (Nom) | (rated) (Nom) | (Nom) |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | - | 4000 K | 114 lm/W | 4,000 lm |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | - | 4000 K | 113 lm/W | 4,000 lm |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | - | 4000 K | 133 lm/W | 4,000 lm |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | - | 4000 K | 121 lm/W | 4,000 lm |
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | - | 4000 K | 133 lm/W | 4,000 lm |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | - | 4000 K | 131 lm/W | 2,700 lm |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | - | 4000 K | 140 lm/W | 4,000 lm |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | - | 4000 K | 132 lm/W | 2,700 lm |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | - | 4000 K | 140 lm/W | 4,000 lm |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | - | 6500 K | 140 lm/W | 4,000 lm |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | - | 3000 K | 130 lm/W | 3,700 lm |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | - | 4000 K | 129 lm/W | 2,700 lm |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | - | 4000 K | 138 lm/W | 4,000 lm |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | - | 4000 K | 121 lm/W | 1,800 lm |

CoreLine Waterproof

| Order Code | Full Product Name | "All-in" Type | Correlated Color | Luminous Efficacy (rated) | Luminous |
|--------------|---|-------------------------|-------------------|---------------------------|----------|
| | | | Temperature (Nom) | (Nom) | Flux |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | - | 4000 K | 122 lm/W | 2,500 lm |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | - | 4000 K | 128 lm/W | 3,100 lm |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | - | 4000 K | 130 lm/W | 3,700 lm |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | - | 4000 K | 133 lm/W | 5,700 lm |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | - | 4000 K | 131 lm/W | 7,500 lm |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | "All-in" Multi Lumen | 4000 K | 141 lm/W | 2,700 lm |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | - | 4000 K | 116 lm/W | 1,900 lm |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | - | 4000 K | 115 lm/W | 1,900 lm |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | - | 4000 K | 127 lm/W | 1,900 lm |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | - | 4000 K | 127 lm/W | 1,900 lm |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | - | 4000 K | 133 lm/W | 3,400 lm |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | - | 4000 K | 131 lm/W | 3,400 lm |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | - | 4000 K | 131 lm/W | 3,400 lm |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | - | 4000 K | 131 lm/W | 3,400 lm |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | - | 4000 K | 113 lm/W | 3,400 lm |
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | - | 4000 K | 110 lm/W | 3,400 lm |

| Order Code | Full Product Name | "All-in" Type | Correlated Color | Luminous Efficacy (rated) | Luminous |
|--------------|---|---------------|-------------------|---------------------------|----------|
| | | | Temperature (Nom) | (Nom) | Flux |
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | - | 4000 K | 110 lm/W | 3,400 lm |
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | - | 4000 K | 135 lm/W | 6,000 lm |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | - | 4000 K | 133 lm/W | 6,000 lm |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | - | 4000 K | 133 lm/W | 6,000 lm |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | - | 4000 K | 135 lm/W | 6,000 lm |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | - | 4000 K | 136 lm/W | 6,000 lm |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | - | 4000 K | 133 lm/W | 6,000 lm |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | - | 4000 K | 121 lm/W | 6,000 lm |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | - | 4000 K | 120 lm/W | 6,000 lm |
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | - | 4000 K | 121 lm/W | 6,000 lm |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | - | 4000 K | 133 lm/W | 8,000 lm |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | - | 4000 K | 131 lm/W | 8,000 lm |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | - | 4000 K | 129 lm/W | 8,000 lm |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | - | 4000 K | 126 lm/W | 8,000 lm |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | - | 4000 K | 144 lm/W | 6,500 lm |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | - | 4000 K | 135 lm/W | 6,500 lm |

CoreLine Waterproof

| Order Code | Full Product Name | "All-in" Type | Correlated Color Temperature (Nom) | Luminous Efficacy (rated) (Nom) | Luminous Flux |
|--------------|-------------------------------------|---------------|------------------------------------|---------------------------------|---------------|
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | - | 4000 K | 141 lm/W | 6,500 lm |
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | - | 4000 K | 131 lm/W | 8,000 lm |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | - | 4000 K | 119 lm/W | 8,000 lm |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | - | 4000 K | 133 lm/W | 8,000 lm |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | - | 4000 K | 138 lm/W | 3,400 lm |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | - | 4000 K | 139 lm/W | 6,000 lm |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | - | 4000 K | 140 lm/W | 8,000 lm |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | - | 4000 K | 140 lm/W | 3,400 lm |

| Order Code | Full Product Name | "All-in" Type | Correlated Color Temperature (Nom) | Luminous Efficacy (rated) (Nom) | Luminous Flux |
|--------------|-----------------------------------|---------------|------------------------------------|---------------------------------|---------------|
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | - | 4000 K | 140 lm/W | 6,000 lm |
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | - | 4000 K | 140 lm/W | 8,000 lm |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | - | 6500 K | 139 lm/W | 3,400 lm |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | - | 6500 K | 140 lm/W | 6,000 lm |
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | - | 3000 K | 128 lm/W | 5,500 lm |
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | - | 4000 K | 142 lm/W | 3,400 lm |
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | - | 4000 K | 140 lm/W | 8,000 lm |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | - | 4000 K | 140 lm/W | 6,000 lm |

Light Technical (2/2)

| Order Code | Full Product Name | Optic type | Stroboscopic effect visibility measure (SVM) |
|--------------|--|-------------|--|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | Symmetrical | 0.4 |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | Wide beam | 1.6 |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | Wide beam | 1.6 |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | Wide beam | 1.6 |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | Wide beam | 1.6 |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | Wide beam | 1.6 |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | Wide beam | 1.6 |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | Wide beam | 1.6 |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | Wide beam | 1.6 |

| Order Code | Full Product Name | Optic type | Stroboscopic effect visibility measure (SVM) |
|--------------|---|------------|--|
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | Wide beam | 1.6 |
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | Wide beam | 1.6 |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | Wide beam | 1.6 |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | Wide beam | 1.6 |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | Wide beam | 1.6 |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | Wide beam | 1.6 |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | Wide beam | 1.6 |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | Wide beam | 1.6 |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | Wide beam | 1.6 |

CoreLine Waterproof

| Order Code | Full Product Name | Optic type | Stroboscopic effect visibility measure (SVM) |
|--------------|---|-----------------|--|
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | Wide beam | 1.6 |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | Beam angle 110° | 1.6 |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | Beam angle 110° | 1.6 |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | Wide beam | 1.6 |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | Wide beam | 1.6 |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | Wide beam | 1.6 |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | Wide beam | 1.6 |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | Symmetrical | 0.4 |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | Symmetrical | 0.4 |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | Very wide beam | 1.6 |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | Very wide beam | 1.6 |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | Very wide beam | 1.6 |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | Very wide beam | 1.6 |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | Very wide beam | 1.6 |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | Very wide beam | 1.6 |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | Symmetrical | 0.4 |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | Wide beam | 1.6 |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | Wide beam | 1.6 |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | Wide beam | 1.6 |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | Symmetrical | 1.6 |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | Wide beam | 1.6 |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | Wide beam | 1.6 |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | Wide beam | 1.6 |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | Wide beam | 1.6 |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | Wide beam | 1.6 |
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | Wide beam | 1.6 |

| Order Code | Full Product Name | Optic type | Stroboscopic effect visibility measure (SVM) |
|--------------|---|-----------------|--|
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | Wide beam | 1.6 |
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | Wide beam | 1.6 |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | Wide beam | 1.6 |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | Wide beam | 1.6 |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | Wide beam | 1.6 |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | Wide beam | 1.6 |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | Wide beam | 1.6 |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | Wide beam | 1.6 |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | Wide beam | 1.6 |
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | Wide beam | 1.6 |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | Wide beam | 1.6 |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | Wide beam | 1.6 |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | Wide beam | 1.6 |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | Wide beam | 1.6 |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | Wide beam | 1.6 |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | Wide beam | 1.6 |
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | Wide beam | 1.6 |
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | Wide beam | 1.6 |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | Wide beam | 1.6 |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | Wide beam | 1.6 |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | Beam angle 110° | 1.6 |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | Beam angle 110° | 1.6 |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | Beam angle 110° | 1.6 |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | Wide beam | 1.6 |
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | Wide beam | 1.6 |

CoreLine Waterproof

| Order Code | Full Product Name | Optic type | Stroboscopic effect visibility measure (SVM) |
|--------------|--------------------------------|------------|--|
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | Wide beam | 1.6 |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | Wide beam | 1.6 |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | Wide beam | 1.6 |
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | Wide beam | 1.6 |

| Order Code | Full Product Name | Optic type | Stroboscopic effect visibility measure (SVM) |
|--------------|-----------------------------------|-------------|--|
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | Symmetrical | 1.6 |
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | Symmetrical | 0.4 |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | Symmetrical | 0.4 |

Operating and Electrical

| Order Code | Full Product Name | Input Voltage | Power Consumption |
|--------------|---|---------------|-------------------|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | 220 to 240 V | 43 W |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | 220 to 240 V | 21.5 W |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | 220 to 240 V | 22 W |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | 220 to 240 V | 22 W |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | 220 to 240 V | 26 W |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | 220 to 240 V | 22 W |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | 220 to 240 V | 27 W |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | 220 to 240 V | 30 W |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | 220 to 240 V | 30.5 W |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | 220 to 240 V | 30 W |
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | 220 to 240 V | 29 W |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | 220 to 240 V | 29.5 W |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | 220 to 240 V | 30.5 W |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | 220 to 240 V | 33 W |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | 220 to 240 V | 35 W |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | 220 to 240 V | 35.5 W |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | 220 to 240 V | 30 W |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | 220 to 240 V | 33 W |

| Order Code | Full Product Name | Input Voltage | Power Consumption |
|--------------|------------------------------------|---------------|-------------------|
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | 220 to 240 V | 30 W |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | 220 to 240 V | 20.5 W |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | 220 to 240 V | 28.5 W |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | 220 to 240 V | 20.5 W |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | 220 to 240 V | 28.6 W |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | 220 to 240 V | 28.5 W |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | 220 to 240 V | 28.5 W |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | 220 to 240 V | 21 W |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | 220 to 240 V | 29 W |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | 220 to 240 V | 15 W |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | 220 to 240 V | 20.5 W |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | 220 to 240 V | 24.3 W |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | 220 to 240 V | 28.6 W |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | 220 to 240 V | 42.9 W |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | 220 to 240 V | 57.1 W |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | 220 to 240 V | 32 W |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | 220 to 240 V | 16.4 W |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | 220 to 240 V | 16.5 W |

CoreLine Waterproof

| Order Code | Full Product Name | Power | |
|--------------|---|---------------|-------------|
| | | Input Voltage | Consumption |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | 220 to 240 V | 15 W |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | 220 to 240 V | 15 W |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | 220 to 240 V | 25.5 W |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | 220 to 240 V | 26 W |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | 220 to 240 V | 26 W |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | 220 to 240 V | 26 W |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | 220 to 240 V | 30 W |
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | 220 to 240 V | 31 W |
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | 220 to 240 V | 31 W |
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | 220 to 240 V | 44.5 W |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | 220 to 240 V | 45 W |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | 220 to 240 V | 45 W |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | 220 to 240 V | 44.5 W |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | 220 to 240 V | 44 W |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | 220 to 240 V | 45 W |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | 220 to 240 V | 49.5 W |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | 220 to 240 V | 50 W |
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | 220 to 240 V | 49.5 W |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | 220 to 240 V | 60 W |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | 220 to 240 V | 61 W |

| Order Code | Full Product Name | Power | |
|--------------|-------------------------------------|---------------|-------------|
| | | Input Voltage | Consumption |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | 220 to 240 V | 62 W |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | 220 to 240 V | 63.5 W |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | 220 to 240 V | 45 W |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | 220 to 240 V | 48 W |
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | 220 to 240 V | 46 W |
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | 220-240 V | 61 W |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | 220-240 V | 67 W |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | 220-240 V | 60 W |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | 220 to 240 V | 24.5 W |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | 220 to 240 V | 43 W |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | 220 to 240 V | 57 W |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | 220 to 240 V | 24.3 W |
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | 220 to 240 V | 42.9 W |
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | 220 to 240 V | 57.1 W |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | 220 to 240 V | 24.5 W |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | 220 to 240 V | 43 W |
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | 220 to 240 V | 43 W |
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | 220 to 240 V | 24 W |
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | 220 to 240 V | 57 W |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | 220 to 240 V | 43 W |

Temperature

| Order Code | Full Product Name | Ambient temperature range |
|--------------|--|---------------------------|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | -20 to +40 °C |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | -20 to +35 °C |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | -20 to +35 °C |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | -20 to +35 °C |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | 0 to +25 °C |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | -20 to +35 °C |

| Order Code | Full Product Name | Ambient temperature range |
|--------------|--|---------------------------|
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | 0 to +25 °C |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | -20 to +35 °C |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | -20 to +35 °C |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | -20 to +35 °C |
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | -20 to +35 °C |

CoreLine Waterproof

| Order Code | Full Product Name | Ambient temperature range |
|--------------|---|---------------------------|
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | -20 to +35 °C |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | -20 to +35 °C |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | 0 to +25 °C |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | 0 to +25 °C |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | 0 to +25 °C |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | -20 to +35 °C |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | 0 to +25 °C |
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | -20 to +35 °C |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | -20 to +40 °C |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | -20 to +40 °C |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | -20 to +40 °C |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | -20 to +40 °C |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | -20 to +40 °C |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | -20 to +40 °C |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | -20 to +40 °C |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | -20 to +40 °C |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | -20 to +40 °C |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | -20 to +40 °C |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | -20 to +40 °C |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | -20 to +40 °C |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | -20 to +40 °C |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | -20 to +40 °C |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | -20 to +40 °C |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | -20 to +35 °C |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | -20 to +35 °C |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | -20 to +40 °C |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | -20 to +40 °C |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | -20 to +35 °C |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | -20 to +35 °C |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | -20 to +35 °C |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | -20 to +35 °C |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | 0 to +25 °C |
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | 0 to +25 °C |
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | 0 to +25 °C |

| Order Code | Full Product Name | Ambient temperature range |
|--------------|---|---------------------------|
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | -20 to +35 °C |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | -20 to +35 °C |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | -20 to +35 °C |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | -20 to +35 °C |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | -20 to +35 °C |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | -20 to +35 °C |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | 0 to +25 °C |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | 0 to +25 °C |
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | 0 to +25 °C |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | -20 to +35 °C |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | -20 to +35 °C |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | -20 to +35 °C |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | 0 to +25 °C |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | -20 to +35 °C |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | 0 to +25 °C |
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | -20 to +35 °C |
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | -20 to +35 °C |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | 0 to +25 °C |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | -20 to +35 °C |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | -20 to +40 °C |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | -20 to +40 °C |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | -20 to +40 °C |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | -20 to +40 °C |
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | -20 to +40 °C |
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | -20 to +40 °C |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | -20 to +40 °C |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | -20 to +40 °C |
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | -20 to +40 °C |
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | -20 to +40 °C |
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | -20 to +40 °C |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | -20 to +40 °C |

Controls and Dimming

| Order Code | Full Product Name | Dimmable |
|--------------|--|----------|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | No |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | No |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | No |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | No |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | No |

| Order Code | Full Product Name | Dimmable |
|--------------|--|----------|
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | Yes |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | Yes |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | No |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | No |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | No |

CoreLine Waterproof

| Order Code | Full Product Name | Dimmable |
|--------------|---|----------|
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | No |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | No |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | Yes |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | No |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | No |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | Yes |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | Yes |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | Yes |
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | Yes |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | No |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | No |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | No |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | No |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | No |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | No |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | No |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | No |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | No |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | No |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | No |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | No |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | No |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | No |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | No |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | No |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | Yes |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | No |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | No |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | No |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | No |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | No |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | Yes |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | No |

| Order Code | Full Product Name | Dimmable |
|--------------|---|----------|
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | No |
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | Yes |
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | No |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | No |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | No |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | No |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | No |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | Yes |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | No |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | No |
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | Yes |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | No |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | No |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | Yes |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | No |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | Yes |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | Yes |
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | Yes |
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | Yes |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | Yes |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | Yes |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | No |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | No |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | No |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | No |
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | No |
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | No |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | No |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | No |
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | No |
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | No |
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | No |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | No |

Mechanical and Housing

| Order Code | Full Product Name | Housing Color |
|--------------|---|---------------|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | Grey |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | Gray |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | Gray |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | Gray |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | Gray |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | Gray |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | Gray |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | Gray |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | Gray |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | Gray |
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | Gray |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | Gray |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | Gray |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | Gray |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | Gray |

| Order Code | Full Product Name | Housing Color |
|--------------|-------------------------------------|---------------|
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | Gray |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | Gray |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | Gray |
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | Gray |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | Gray |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | Gray |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | Gray |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | Gray |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | Gray |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | Gray |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | Grey |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | Grey |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | Gray |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | Gray |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | Gray |

CoreLine Waterproof

| Order Code | Full Product Name | Housing Color |
|--------------|---|---------------|
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | Gray |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | Gray |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | Gray |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | Grey |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | Gray |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | Gray |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | Gray |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | Grey |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | Gray |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | Gray |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | Gray |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | Gray |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | Gray |
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | Gray |
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | Gray |
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | Gray |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | Gray |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | Gray |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | Gray |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | Gray |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | Gray |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | Gray |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | Gray |

| Order Code | Full Product Name | Housing Color |
|--------------|-------------------------------------|---------------|
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | Gray |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | Gray |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | Gray |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | Gray |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | Gray |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | Gray |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | Gray |
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | Gray |
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | Gray |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | Gray |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | Gray |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | Gray |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | Gray |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | Gray |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | Gray |
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | Gray |
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | Gray |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | Gray |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | Gray |
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | Gray |
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | Grey |
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | Grey |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | Grey |

Emergency Operation

| Order Code | Full Product Name | Emergency flux | Power consumption during Central DC emergency mode |
|--------------|--|----------------|--|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | - | - |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | - | - |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | - | - |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | - | - |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | 500 lm | 3 W |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | - | - |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | 500 lm | 3 W |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | - | - |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | - | - |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | - | - |

| Order Code | Full Product Name | Emergency flux | Power consumption during Central DC emergency mode |
|--------------|---|----------------|--|
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | - | - |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | - | - |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | - | - |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | 500 lm | 3 W |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | 500 lm | 3 W |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | 500 lm | 3 W |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | - | - |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | 500 lm | 3 W |
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | - | - |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | - | - |

CoreLine Waterproof

| Order Code | Full Product Name | Emergency flux | Power consumption during Central DC emergency mode |
|--------------|---|----------------|--|
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | - | - |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | - | - |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | - | - |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | - | - |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | - | - |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | - | - |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | - | - |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | - | - |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | - | - |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | - | - |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | - | - |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | - | - |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | - | - |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | - | - |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | - | - |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | - | - |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | - | - |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | - | - |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | - | - |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | - | - |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | - | - |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | - | - |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | 500 lm | 3 W |
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | 500 lm | 3 W |
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | 500 lm | 3 W |

| Order Code | Full Product Name | Emergency flux | Power consumption during Central DC emergency mode |
|--------------|---|----------------|--|
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | - | - |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | - | - |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | - | - |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | - | - |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | - | - |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | - | - |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | 500 lm | 3 W |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | 500 lm | 3 W |
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | 500 lm | 3 W |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | - | - |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | - | - |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | - | - |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | 500 lm | 3 W |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | - | - |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | 500 lm | 3 W |
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | - | - |
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | - | - |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | 500 lm | 3 W |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | - | - |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | - | - |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | - | - |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | - | - |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | - | - |
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | - | - |

CoreLine Waterproof

| Order Code | Full Product Name | Emergency flux | Power consumption during Central DC emergency mode |
|--------------|--------------------------------|----------------|--|
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | - | - |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | - | - |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | - | - |
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | - | - |

| Order Code | Full Product Name | Emergency flux | Power consumption during Central DC emergency mode |
|--------------|-----------------------------------|----------------|--|
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | - | - |
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | - | - |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | - | - |

Initial Performance (IEC Compliant)

| Order Code | Full Product Name | Initial chromaticity |
|--------------|---|----------------------|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | (0.38,0.38)SDCM<=3 |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | (0.38,0.38)SDCM<=3 |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | (0.38,0.38)SDCM<=3 |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | (0.38,0.38)SDCM<=3 |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | (0.38,0.38)SDCM<=3 |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | (0.38,0.38)SDCM<=3 |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | (0.38,0.38)SDCM<=3 |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | (0.38,0.38)SDCM<=3 |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | (0.38,0.38)SDCM<=3 |
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | (0.38,0.38)SDCM<=3 |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | (0.38,0.38)SDCM<=3 |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | (0.38,0.38)SDCM<=3 |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | (0.38,0.38)SDCM<=3 |
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | (0.38,0.38)SDCM<=3 |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | (0.31,0.32)SDCM<=3 |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | (0.43,0.40)SDCM<=3 |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | (0.38,0.38)SDCM<=3 |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | (0.38,0.38)SDCM<=3 |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | (0.38,0.38)SDCM<=3 |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | (0.38,0.38)SDCM<=3 |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | (0.38,0.38)SDCM<=3 |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | (0.38,0.38)SDCM<=3 |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | (0.38,0.38)SDCM<=3 |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | (0.38,0.38)SDCM<=3 |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | (0.38,0.38)SDCM<=3 |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | (0.38,0.38)SDCM<=3 |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | (0.38,0.38)SDCM<=3 |

| Order Code | Full Product Name | Initial chromaticity |
|--------------|---|----------------------|
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | (0.38,0.38)SDCM<=3 |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | (0.38,0.38)SDCM<=3 |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | (0.38,0.38)SDCM<=3 |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | (0.38,0.38)SDCM<=3 |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | (0.38,0.38)SDCM<=3 |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | (0.38,0.38)SDCM<=3 |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | (0.38,0.38)SDCM<=3 |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | (0.38,0.38)SDCM<=3 |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | (0.38,0.38)SDCM<=3 |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | (0.38,0.38)SDCM<=3 |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | (0.38,0.38)SDCM<=3 |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | (0.38,0.38)SDCM<=3 |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | (0.38,0.38)SDCM<=3 |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | (0.38,0.38)SDCM<=3 |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | (0.38,0.38)SDCM<=3 |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | (0.38,0.38)SDCM<=3 |
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | (0.38,0.38)SDCM<=3 |
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | (0.38,0.38)SDCM<=3 |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | (0.31,0.32)SDCM<=3 |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | (0.31,0.32)SDCM<=3 |

CoreLine Waterproof

| Order Code | Full Product Name | Initial chromaticity |
|--------------|-----------------------------------|----------------------|
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | (0.43,0.40)SDCM<=3 |
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | (0.38,0.38)SDCM<=3 |

| Order Code | Full Product Name | Initial chromaticity |
|--------------|-----------------------------------|----------------------|
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | (0.38,0.38)SDCM<=3 |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | (0.38,0.38)SDCM<=3 |

Application Conditions

| Order Code | Full Product Name | Maximum dim level | Suitable for random switching |
|--------------|---|-------------------|-------------------------------|
| 911401815085 | WT120C G2 LED37_60S/840 PSU L1500 | - | Yes |
| 910505100039 | WT120C G2 LED27S/840 PSU TW3 L1200 | Not applicable | Not applicable |
| 910505100040 | WT120C G2 LED27S/840 PSU MDU L1200 | Not applicable | Yes |
| 910505100041 | WT120C G2 LED27S/840 PSU MDU TW3 L1200 | Not applicable | Yes |
| 910505100042 | WT120C G2 LED27S/840 PSU ELB3 L1200 | Not applicable | Not applicable |
| 910505100044 | WT120C G2 LED27S/840 PSD L1200 | 1% | Not applicable |
| 910505100045 | WT120C G2 LED27S/840 PSD ELB3 L1200 | 1% | Not applicable |
| 910505100047 | WT120C G2 LED40S/840 PSU TW3 L1200 | Not applicable | Not applicable |
| 910505100048 | WT120C G2 LED40S/840 PSU MDU L1200 | Not applicable | Yes |
| 910505100049 | WT120C G2 LED40S/840 PSU MDU TW3 L1200 | Not applicable | Yes |
| 910505100050 | WT120C G2 LED40S/840 PSU WEC L1200 | Not applicable | Not applicable |
| 910505100051 | WT120C G2 LED40S/840 PSU TW1 WEC L1200 | Not applicable | Not applicable |
| 910505100053 | WT120C G2 LED40S/840 PSD L1200 | 1% | Not applicable |
| 910505100054 | WT120C G2 LED40S/840 PSU ELB3 L1200 | Not applicable | Not applicable |
| 910505100055 | WT120C G2 LED40S/840 PSU MDU ELB3 L1200 | Not applicable | Yes |
| 910505100057 | WT120C G2 LED40S/840 PSD ELB3 L1200 | 1% | Not applicable |
| 910505101269 | WT120C G2 LED40S/840 WIA L1200 | 10% | Not applicable |
| 910505101270 | WT120C G2 LED40S/840 WIA ELB3 L1200 | 10% | Not applicable |
| 910505101273 | WT120C G2 LED40S/840 WIA TW3 L1200 | 10% | Not applicable |
| 911401535291 | WT120C G2 LED27S/840 PSU TW3 L1200 | Not applicable | Not applicable |
| 911401535391 | WT120C G2 LED40S/840 PSU TW3 L1200 | Not applicable | Not applicable |
| 911401823580 | WT120C G2 LED27S/840 PSU L1200 | Not applicable | Not applicable |

| Order Code | Full Product Name | Maximum dim level | Suitable for random switching |
|--------------|---|-------------------|-------------------------------|
| 911401823780 | WT120C G2 LED40S/840 PSU L1200 | Not applicable | Not applicable |
| 911401824381 | WT120C G2 LED40S/865 PSU L1200 | Not applicable | Not applicable |
| 911401824681 | WT120C G2 LED37S/830 PSU L1200 | Not applicable | Not applicable |
| 911401826785 | WT120C G2 LED27S/840 PSU L1200 BN | - | Yes |
| 911401826885 | WT120C G2 LED40S/840 PSU L1200 BN | - | Yes |
| 911401836980 | WT120C G2 LED18S/840 PSU PCO L600 | Not applicable | Not applicable |
| 911401837080 | WT120C G2 LED25S/840 PSU PCO L1200 | Not applicable | Not applicable |
| 911401837180 | WT120C G2 LED31S/840 PSU PCO L1500 | Not applicable | Not applicable |
| 911401837280 | WT120C G2 LED37S/840 PSU PCO L1200 | Not applicable | Not applicable |
| 911401837380 | WT120C G2 LED57S/840 PSU PCO L1500 | Not applicable | Not applicable |
| 911401837480 | WT120C G2 LED75S/840 PSU PCO L1500 | Not applicable | Not applicable |
| 911401814985 | WT120C G2 LED27_45S/840 PSU L1200 | - | Yes |
| 910505100036 | WT120C G2 LED19S/840 PSU MDU L600 | Not applicable | Yes |
| 910505100038 | WT120C G2 LED19S/840 PSD L600 | 1% | Not applicable |
| 911401823480 | WT120C G2 LED19S/840 PSU L600 | Not applicable | Not applicable |
| 911401825885 | WT120C G2 LED19S/840 PSU L600 BN | - | Yes |
| 910505100058 | WT120C G2 LED34S/840 PSU TW3 L1500 | Not applicable | Not applicable |
| 910505100059 | WT120C G2 LED34S/840 PSU MDU L1500 | Not applicable | Yes |
| 910505100060 | WT120C G2 LED34S/840 PSU MDU TW3 L1500 | Not applicable | Yes |
| 910505100061 | WT120C G2 LED34S/840 PSD L1500 | 1% | Not applicable |
| 910505100062 | WT120C G2 LED34S/840 PSU ELB3 L1500 | Not applicable | Not applicable |
| 910505100063 | WT120C G2 LED34S/840 PSU MDU ELB3 L1500 | Not applicable | Yes |
| 910505100064 | WT120C G2 LED34S/840 PSD ELB3 L1500 | 1% | Not applicable |

CoreLine Waterproof

| Order Code | Full Product Name | Maximum dim level | Suitable for random switching |
|--------------|---|-------------------|-------------------------------|
| 910505100066 | WT120C G2 LED60S/840 PSU TW3 L1500 | Not applicable | Not applicable |
| 910505100067 | WT120C G2 LED60S/840 PSU MDU L1500 | Not applicable | Yes |
| 910505100068 | WT120C G2 LED60S/840 PSU MDU TW3 L1500 | Not applicable | Yes |
| 910505100069 | WT120C G2 LED60S/840 PSU WEC L1500 | Not applicable | Not applicable |
| 910505100070 | WT120C G2 LED60S/840 PSU TW1 WEC L1500 | Not applicable | Not applicable |
| 910505100072 | WT120C G2 LED60S/840 PSD L1500 | 1% | Not applicable |
| 910505100073 | WT120C G2 LED60S/840 PSU ELB3 L1500 | Not applicable | Not applicable |
| 910505100074 | WT120C G2 LED60S/840 PSU MDU ELB3 L1500 | Not applicable | Yes |
| 910505100076 | WT120C G2 LED60S/840 PSD ELB3 L1500 | 1% | Not applicable |
| 910505100077 | WT120C G2 LED80S/840 PSU TW3 L1500 | Not applicable | Not applicable |
| 910505100078 | WT120C G2 LED80S/840 PSU MDU L1500 | Not applicable | Yes |
| 910505100079 | WT120C G2 LED80S/840 PSD L1500 | 1% | Not applicable |
| 910505100080 | WT120C G2 LED80S/840 PSU L1500 ELB3 | Not applicable | Not applicable |
| 910505101271 | WT120C G2 LED65S/840 WIA L1500 | 10% | Not applicable |
| 910505101272 | WT120C G2 LED65S/840 WIA ELB3 L1500 | 10% | Not applicable |
| 910505101274 | WT120C G2 LED65S/840 WIA TW3 L1500 | 10% | Not applicable |

| Order Code | Full Product Name | Maximum dim level | Suitable for random switching |
|--------------|-------------------------------------|-------------------|-------------------------------|
| 910505103013 | WT120C G2 LED80S/840 WIA L1500 | 10% | Not applicable |
| 910505103014 | WT120C G2 LED80S/840 WIA ELB3 L1500 | 10% | Not applicable |
| 910505103015 | WT120C G2 LED80S/840 WIA TW3 L1500 | 10% | Not applicable |
| 911401535491 | WT120C G2 LED34S/840 PSU TW3 L1500 | Not applicable | Not applicable |
| 911401535591 | WT120C G2 LED60S/840 PSU TW3 L1500 | Not applicable | Not applicable |
| 911401535691 | WT120C G2 LED80S/840 PSU TW3 L1500 | Not applicable | Not applicable |
| 911401823680 | WT120C G2 LED34S/840 PSU L1500 | Not applicable | Not applicable |
| 911401823880 | WT120C G2 LED60S/840 PSU L1500 | Not applicable | Not applicable |
| 911401823980 | WT120C G2 LED80S/840 PSU L1500 | Not applicable | Not applicable |
| 911401824481 | WT120C G2 LED34S/865 PSU L1500 | Not applicable | Not applicable |
| 911401824581 | WT120C G2 LED60S/865 PSU L1500 | Not applicable | Not applicable |
| 911401824781 | WT120C G2 LED55S/830 PSU L1500 | Not applicable | Not applicable |
| 911401825985 | WT120C G2 LED34S/840 PSU L1500 BN | - | Yes |
| 911401826085 | WT120C G2 LED80S/840 PSU L1500 BN | - | Yes |
| 911401826985 | WT120C G2 LED60S/840 PSU L1500 BN | - | Yes |

