



Appropriate choice for many fluorescent lamp types on the market

Standard

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Benefits

- 60 HZ lamp operation eliminates possible EMI/RFI interference

Features

- Only choice for many low volume lamp types on the market

Application

- General office, warehouses, gymnasiums, manufacturing facilities, parking garages

Standard

Versions




RLCS140TPWI

H1B9TPWM

LC1420CTPI

REL2P59SRHTP35I



LO1322TPM



VH2B13TPBLSM





H1Q26TPWM



RC2S102TPI

Dimensional drawing


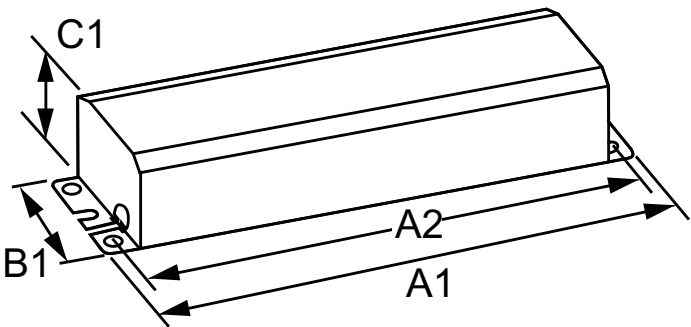



Product	A1	A2	B1	C1
STANDARD LO1322M	3.06 in	2.75 in	1.44 in	1.81 in
STANDARD VLO2S13TPI	4 in	3.5 in	1.81 in	2.25 in
STANDARD LOS1Q28M	3.06 in	2.75 in	1.5 in	1.81 in
STANDARD LO1322TPM	3.06 in	2.75 in	1.44 in	1.81 in

Product	A1	A2	B1	C1
STANDARD RS3240TPWI	6.5 in	6 in	2.38 in	1.5 in
STANDARD H2B13TPBLSM	6.5 in	6 in	2.38 in	1.5 in
STANDARD H1Q26TPBLSM	6.5 in	6 in	2.38 in	1.5 in
STANDARD HM2SP20TPM	9.5 in	8.91 in	2.38 in	1.5 in
STANDARD RS2232TPWI	6.5 in	6 in	2.38 in	1.5 in

Standard

Dimensional drawing

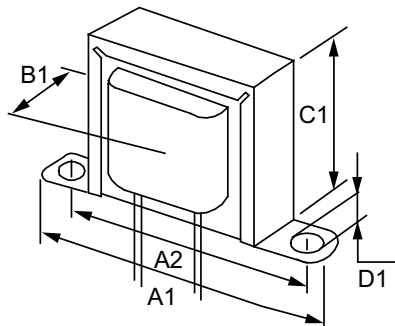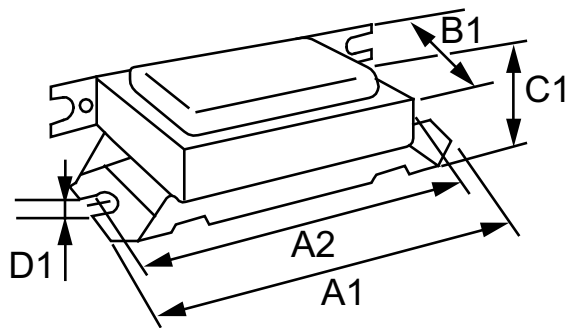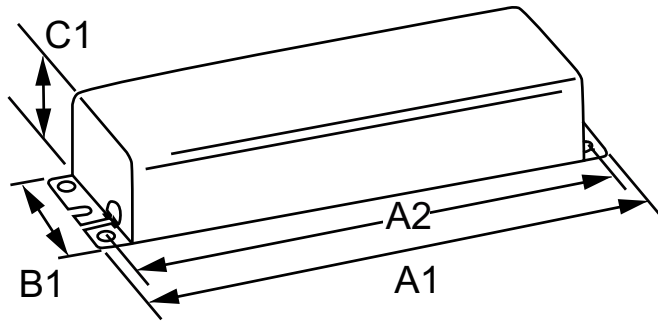

Product	A1	A2	B1	C1
STANDARD RS2S200TPI	14.31 in	13.75 in	3.19 in	2.63 in
STANDARD RC2S200TPI	14.31 in	13.75 in	3.19 in	2.63 in
STANDARD RC2S102TPI	14.31 in	13.75 in	3.19 in	2.63 in
STANDARD H1B13TPWI	4.25 in	3.56 in	2 in	1.44 in
STANDARD H2Q26TPBLSM	9.5 in	8.91 in	2.38 in	1.69 in
STANDARD VH2B13TPBLSM	4.75 in	4.38 in	2.22 in	1.63 in
STANDARD RLQ120TPM	6.5 in	6 in	1.94 in	1.38 in
STANDARD H1B9TPWM	4.25 in	3.56 in	2 in	1.44 in
STANDARD RLCS140TPWI	6.5 in	6 in	1.94 in	1.38 in

Product	A1	A2	B1	C1	D1
STANDARD LC25TPI	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC49CTPM	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC13TPI	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC1420CM	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC1420CTPM	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in
STANDARD LC13TPM	3.06 in	2.75 in	1.81 in	1.59 in	0.19 in

Product	A1	A2	B1	C1	D1
STANDARD LPL59TPM	2.38 in	2 in	1.59 in	1.38 in	0.19 in
STANDARD LPL59M	2.38 in	2 in	1.59 in	1.38 in	0.19 in
STANDARD LPL59TPI	2.38 in	2 in	1.59 in	1.38 in	0.19 in

Operating and Electrical

Input Frequency 60 Hz

Operating and Electrical

Order Code	Full Product Name	Input Voltage	Total Harmonic Distortion USA
132035	STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V	120 V	10 %
132043	STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V	120 V	15 %
198549	STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V	120 V	20 %
173930	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V	120 V	20 %

Order Code	Full Product Name	Input Voltage	Total Harmonic Distortion USA
109595	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	120 V	25 %
181628	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	120 V	15 %
181644	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
174177	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %

Standard

Order Code	Full Product Name	Input Voltage	Total Harmonic Distortion USA
503151	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	120 V	15 %
399113	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	15 %
120303	STANDARD MAG BALLAST (1) F25T12 PH 120V	120 V	10 %
182345	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
398164	STANDARD MAG BALLAST (2) F20T12 PH 120V	120 V	10 %
174219	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	15 %
174243	STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V	120 V	15 %
174250	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	10 %
174268	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	15 %
198556	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	277 V	15 %

Order Code	Full Product Name	Input Voltage	Total Harmonic Distortion USA
174201	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
113118	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	15 %
175026	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	277 V	35 %
504647	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V	120 V	30 %
399097	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	120 V	25 %
508366	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V	120 V	15 %
136929	STANDARD MAG BALLAST (2) F48T12/VHO 120V	120 V	30 %
107060	STANDARD MAG BALLAST (2) F96T12/VHO 120V	120 V	20 %
136945	STANDARD MAG BALLAST (2) F96T12/VHO 120V	120 V	15 %

General Information

Order Code	Full Product Name	Number Of Lamps	Lamp Type
132035	STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V	1 piece/unit	FC16T9
132043	STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V	2 piece/unit	FC8T9 & FC12T9
198549	STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V	2 piece/unit	FC12T9 & FC16T9
173930	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V	1 piece/unit	CFQ9W/G23
109595	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	1 piece/unit	CFQ13W/GX23
181628	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	1 piece/unit	CFQ13W/GX23
181644	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
174177	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
503151	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	1 piece/unit	CFQ13W/GX23
399113	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	CFQ9W/G23
120303	STANDARD MAG BALLAST (1) F25T12 PH 120V	1 piece/unit	F25T12
182345	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
398164	STANDARD MAG BALLAST (2) F20T12 PH 120V	2 piece/unit	F20T12

Order Code	Full Product Name	Number Of Lamps	Lamp Type
174219	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
174243	STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V	1 piece/unit	CFQ27W/ GX32D
174250	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	F8T5
174268	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	CFQ9W/G23
198556	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	2 piece/unit	CFQ13W/GX23
174201	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
113118	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	CFQ9W/G23
175026	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	2 piece/unit	CFQ13W/GX23
504647	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V	2 piece/unit	CFQ13W/GX23
399097	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	1 piece/unit	CFQ26W/G24D
508366	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V	2 piece/unit	CFQ26W/G24D
136929	STANDARD MAG BALLAST (2) F48T12/VHO 120V	1/2 piece/unit	F96T12/VHO
107060	STANDARD MAG BALLAST (2) F96T12/VHO 120V	1/2 piece/unit	F96T12/VHO

Standard

Order Code	Full Product Name	Number Of Lamps	Lamp Type
136945	STANDARD MAG BALLAST (2) F96T12/VHO 120V	1/2 piece/unit	F96T12/VHO

Mechanical and Housing

Order Code	Full Product Name	Housing
132035	STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V	R4
132043	STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V	T1
198549	STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V	T1
173930	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V	R1
109595	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	R1
181628	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	C2
181644	STANDARD MAG BALLAST (1) F20T12 PH 120V	C2
174177	STANDARD MAG BALLAST (1) F20T12 PH 120V	C2
503151	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	C2
399113	STANDARD MAG BALLAST (1) F8T5 PH 120V	C2
120303	STANDARD MAG BALLAST (1) F25T12 PH 120V	C2
182345	STANDARD MAG BALLAST (1) F20T12 PH 120V	R4
398164	STANDARD MAG BALLAST (2) F20T12 PH 120V	T2
174219	STANDARD MAG BALLAST (1) F20T12 PH 120V	X3

Order Code	Full Product Name	Housing
174243	STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V	X6
174250	STANDARD MAG BALLAST (1) F8T5 PH 120V	X1
174268	STANDARD MAG BALLAST (1) F8T5 PH 120V	X1
198556	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	X8
174201	STANDARD MAG BALLAST (1) F20T12 PH 120V	X3
113118	STANDARD MAG BALLAST (1) F8T5 PH 120V	X1
175026	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	R2
504647	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V	T1
399097	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	T1
508366	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V	R5
136929	STANDARD MAG BALLAST (2) F48T12/VHO 120V	R11
107060	STANDARD MAG BALLAST (2) F96T12/VHO 120V	R11
136945	STANDARD MAG BALLAST (2) F96T12/VHO 120V	R11

