

HID-Basic BSX for SOX

BSX 35/55 L82 240V 50Hz WITH BRACKET

Impregnated electromagnetic copper/iron ballasts for use with an external ignitor for SOX and SOX-E lamps


Product data

Operating and Electrical	
Input Voltage	240 V
Line Frequency	50 Hz
Input Frequency	50 Hz
Wiring	
Connector Type	Insert
Approval and Application	
Approval Marks	CE marking ENEC certificate
Product Data	
Order product name	BSX 35/55 L82 240V 50Hz WITH BRACKET

Full product name	BSX 35/55 L82 240V 50Hz WITH BRACKET
Full product code	872790090500700
Order code	913700279926
Material Nr. (12NC)	913700279926
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500999221
Numerator - Packs per outer box	15
EAN/UPC - Case	8727900905007

HID-Basic BSX for SOX

Dimensional drawing

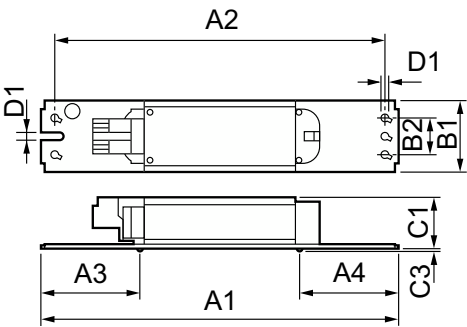

Product	D1	C1	C3	A1	A2	A3	A4	B1	B2
BSX 35/55 L82	4.2	28.0	1.5	196.0	180.0	54.0	54.0	39.0	20.0
240V 50Hz	mm	mm	mm	mm	mm	mm	mm	mm	mm
WITH									
BRACKET									

