



Transformers

AUTO-TRANSFORMER AUTOXFMR 277:115 300VA JBOX

Stepdown transformers and autotransformers are used when you need to connect a lower voltage device to a higher voltage source.

Product data


General Information				
Circuit Type	Transformer			
Ballast Type	Magnetic HID			
Base Model	71A9741J			
Core Size	7/8" E/I			
Suitable For Outdoor Use	Yes			
Operating and Electrical				
Input Voltage	277:120 or 120:277 V			
Input Frequency	60 Hz			
Input Current (Nom)	1.1 A			
Rated Lamp Power	300 VA load W			
Wiring				
Wire Striplength	0.5 mm			
Wire Length by Color	8-1/2"			
Wire Type	Stranded			
Remote Wiring Configuration Allowed Yes				
Mechanical and Housing				
Housing Material	Metal			

Housing	Coil cover wtih 1-2 NIP
Housing Dimensions	4.0" x 2.19" x 2.63"
Approval and Application	
Approval Marks	ULR RoHS Compliant
Temperature Marking	Thermally protected
UL Recognized	Yes
UL Insulation Class	H(180°C)
UL Temperature Code	NA
Product Data	
Order product name	AUTO-TRANSFORMER AUTOXFMR 277:115
	300VA JBOX
EAN/UPC - Product	781087042601
Order code	913710559502
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	16
Material Nr. (12NC)	913710559502
Net Weight (Piece)	1.575 kg

Datasheet, 2019, March 22 data subject to change

Transformers

Dimensional drawing

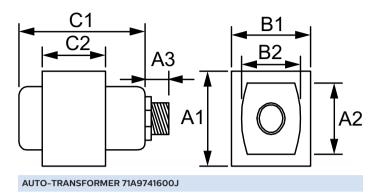

Product	C 1	C2	A1	A2	B1	B2
AUTO-TRANSFORMER AUTOXFMR	4 in	2 in	2.63 in	1.81 in	2.19 in	1.84 in
277:115 300VA JBOX						



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.