



# Transformers

## AUTO-TRANSFORMER AUTOXFMR 277:115 200VA JBOX

Stepdown transformers and autotransformers are used when you need to connect a lower voltage device to a higher voltage source.

#### **Product data**

General Information				
Circuit Type	Transformer			
Ballast Type	Magnetic HID			
Base Model	71A9839J			
Core Size	7/8" E/I			
Suitable For Outdoor Use	Yes			
Operating and Electrical				
Input Voltage	277:120 V			
Input Frequency	60 Hz			
Input Current (Operating) (Nom)	0.8 A			
Rated Lamp Watts	200 VA load W			
Wiring				
Wire Striplength	0.5 mm			
Wire Length by Color	8-1/2"			
Wire Type	Stranded			
Remote Wiring Configuration Allowed Yes				
Mechanical and Housing				


Metal

Housing	Coil cover wtih 1-2 NIP				
Housing Dimensions	4.2" x 2.19" x 2.63"				
Approval and Application					
Approbation Marks	ULR RoHS Compliant				
Temperature Marking	Thermally protected				
UL Recognized	Yes				
UL Insulation Class	H(180°C)				
UL Temperature Code	NA				
Product Data					
Order product name	AUTO-TRANSFORMER AUTOXFMR 277:115				
	200VA JBOX				
EAN/UPC - Product	781087053959				
Order code	71A9839600J				
Numerator - Quantity Per Pack	1				
Numerator - Packs per outer box	16				
Material Nr. (12NC)	913710560302				
Net Weight (Piece)	1.529 kg				

Housing Material

### Transformers

#### Dimensional drawing

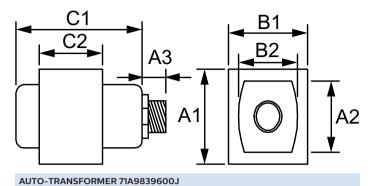

Product	C1	C2	A1	A2	B1	B2
AUTO-TRANSFORMER AUTOXFMR	4.2 in	2.2 in	2.63 in	1.81 in	2.19 in	1.84 in
277:115 200VA JBOX						



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.

www.lighting.philips.com 2019, March 22 - data subject to change