



Transformers

AUTO-TRANSFORMER AUTOXFMR 347:120/277 395VA JBOX

Stepdown transformers and autotransformers are used when you need to connect a lower voltage device to a higher voltage source.


Product data

General Information	
Circuit Type	Transformer
Ballast Type	Magnetic HID
Base Model	71A9862J
Core Size	7/8" E/I
Suitable For Outdoor Use	Yes
Operating and Electrical	
Input Voltage	347:(120/277) V
Input Frequency	60 Hz
Input Current (Operating) (Nom)	0.92 A
Rated Lamp Watts	395 VA load W
Wiring	
Wire Striplength	0.5 mm
Wire Length by Color	8-1/2"
Wire Type	Stranded
Remote Wiring Configuration Allowed	Yes
Mechanical and Housing	
Housing Material	Metal

Housing	Coil cover with 1-2 NIP
Housing Dimensions	4.7" x 2.19" x 2.63"
Approval and Application	
Approval Marks	CSA certificate RoHS Compliant
Temperature Marking	Thermally protected
UL Recognized	No
UL Insulation Class	H(180°C)
UL Temperature Code	NA
Product Data	
Order product name	AUTO-TRANSFORMER AUTOXFMR 347:120/277 395VA JBOX
EAN/UPC - Product	781087052785
Order code	71A9862600J
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	913710560602
Net Weight (Piece)	2.210 kg

Transformers

Dimensional drawing

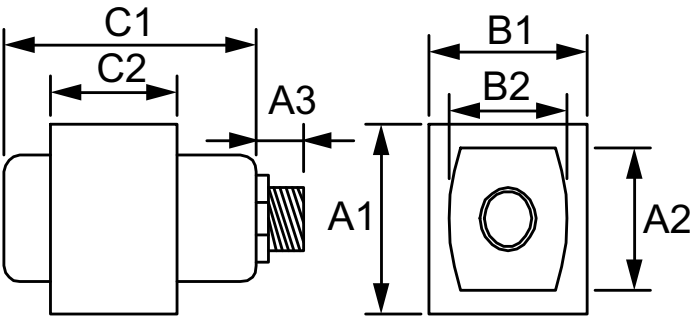

AUTO-TRANSFORMER 71A9862600J

Product	C1	C2	A1	A2	B1	B2
AUTO-TRANSFORMER AUTOXFMR	4.7 in	2.7 in	2.63 in	1.81 in	2.19 in	1.84 in
347:120/277 395VA JBOX						

