



Maxos TL-D, trapeze reflectors and optics

4MX092 2 58 T-WB IP64 WH

MAXOS R T8, 2, 58 W

The sturdy trapeze reflectors for TL-D are designed primarily for applications in industry, supermarkets and shops. They are made of steel with a white or silver finish. The reflectors are optimized for electrical units holding 1 or 2 TL-D lamps and provide an excellent light output ratio. There are basic trapeze reflectors without an additional mirror inlay and trapeze reflectors with dedicated aluminum mirror inlays. These are designed for wide-beam, narrow-beam and asymmetrical wall-washing light distributions. Moreover, perforated and slotted trapeze reflectors (without mirror inlays) can be ordered for design reasons or to create an indirect uplighting effect. For glare reduction, the trapeze reflector can be equipped with a steel louver (L-T) that has a white or silver finish. If emergency lighting by means of separately connected orientation light units (E27-sockets) is required, special trapeze reflectors with a bigger cut-off must be used. The length of this reflector corresponds to that of the 58 W trunking length. A 36 W electrical unit plus the orientation light unit will fill this length. The reflectors are fixed to the electrical units via a simple click-in. The reflectors can be connected to each other in a line by means of an integrated connection at one end of the reflector. End plates for the beginning and end of the light line are available as accessories.

Product data

General Information

Accessory color	White
Product family code	4MX092 [MAXOS R T8]

Light Technical

Number of light sources	2
-------------------------	---

Maxos TL-D, trapeze reflectors and optics


Operating and Electrical	
Power Consumption	58 W

Approval and Application	
Ingress protection code	IP64 [Dust penetration-protected, splashproof]

Product Data	
Order product name	4MX092 2 58 T-WB IP64 WH
Full product name	4MX092 2 58 T-WB IP64 WH

Full product code	403073254092199
Order code	910605111326
Material Nr. (12NC)	910605111326
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	4030732540921
Numerator - Packs per outer box	6
EAN/UPC - Case	4030732110476

Dimensional drawing

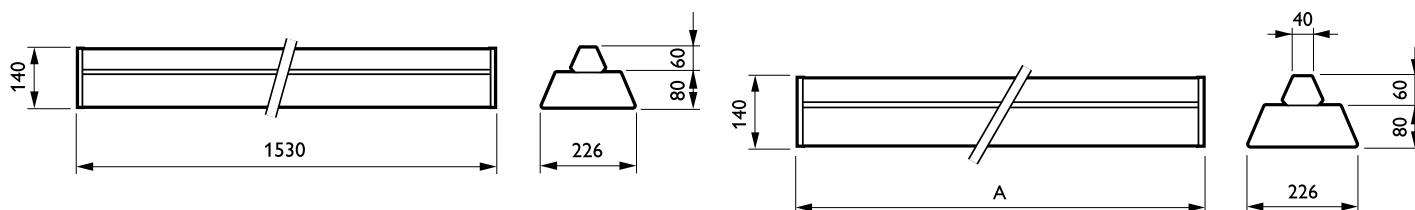

Product

4MX092 2 58 T-WB IP64 WH

