# Lighting

**PHILIPS** 



# **PL-L Long 4-Pin Base**

## PL-L 50W/835/4P/RS 1CT/25

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.


#### **Product data**

General Information			
Cap-Base	2G11 [2G11]		
Life to 50% Failures (Nom)	10,000 hour(s)		
Light Technical			
Color Code	835 [CCT of 3500K]		
Luminous Flux	4,000 lm		
Color Designation	White (WH)		
Correlated Color Temperature (Nom)	3500 K		
Luminous Efficacy (rated) (Nom)	80 lm/W		
Color rendering index (CRI)	82		
Operating and Electrical			
Power Consumption	50 W		
Lamp Current (Nom)	0.430 A		
Voltage (Nom)	150 V		

150 V			
Yes			
PL-L 50W/835/4P/RS 1CT/25			
PL-L 50W/835/4P/RS 1CT/25			
347534			
927908583527			
1			
046677112684			
25			
50046677112689			


### PL-L Long 4-Pin Base

#### Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-L 50W/835/4P/RS 1CT/25	39.0 mm	18.0 mm	539.2 mm	565 mm	571.6 mm

Photometric data

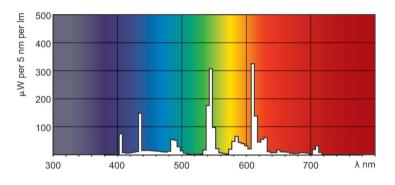

Spectral Power Distribution Colour - PL-L 50W/835/4P/RS 1CT/25



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 15 - data subject to change