PHILIPS Lighting

T5 Preheat

F13T5/30U 25PK

Philips T5 Fluorescent Lamps are incredibly powerful, environmentally responsible, long life lamps with an ultra-slim profile. This translates into reduced maintenance and disposal costs and also allows the use of smaller fixtures—which reduces ceiling clutter.

Product data

General Information			
Cap-Base	G5		
Life to 50% Failures (Nom)	8,000 hour(s)		
Light Technical			
Color Code	830 [CCT of 3000K]		
Luminous Flux	1,000 lm		
Color Designation	Warm White (WW)		
Correlated Color Temperature (Nom)	3000 K		
Luminous Efficacy (rated) (Nom)	77 lm/W		
Color rendering index (CRI)	83		
Operating and Electrical			
Power Consumption	13.0 W		
Lamp Current (Nom)	0.170 A		
Voltage (Nom)	90 V		
Voltage (Nom)	90 V		
Controls and Dimming			
Dimmable	Yes		


Mechanical and Housing			
Bulb Shape	T5		
Approval and Application			
Mercury (Hg) Content (Nom)	3.0 mg		
Energy Consumption kWh/1000 h	14 kWh		
Product Data			
Order product name	F13T5/30U 25PK		
Full product name	F13T5/30U 25PK		
Order code	207035		
Material Nr. (12NC)	928001508332		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	046677207038		
Numerator - Packs per outer box	25		
EAN/UPC - Case	50046677207033		

T5 Preheat

Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
F13T5/30U 25PK	16 mm	516.9 mm	524.0 mm	521.6 mm	531.1 mm

Photometric data

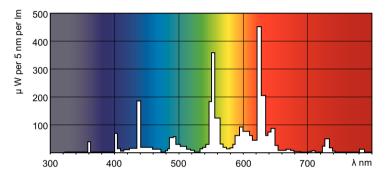

Spectral Power Distribution Colour - F13T5/30U 25PK



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 14 - data subject to change