



# MASTERColour CDM-T Evolution

# MC CDM-T Evolution 70W/930 G12

Single-ended, highest-efficiency, longest-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

#### **Warnings and Safety**

- · Use only in a totally enclosed luminaire, even during testing (IEC61167, IEC62035, IEC60598)
- $\cdot$  The luminaire must be able to contain hot lamp parts if the lamp ruptures
- $\cdot$  Use only with electronic control gear
- The vast majority of drivers are fully compatible with CDM Evolution lamps. However, best performance is guaranteed with Philips drivers.
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- $\cdot$  CDM Evolution lamps are designed to comply with IEC standards
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information					
Cap-Base	G12 [G12]				
Operating Position	VBU/VBD60 [Vertical or Base Up/Base Down				
	+/-60D]				
Life to 50% Failures (Nom)	20,000 hour(s)				
Light Technical					
Color Code	930 [CCT of 3000K]				
Color Designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.426				
Chromaticity Coordinate Y (Nom)	0.388				
	-				

Correlated Color Temperature (Nom) 3000 K			
Luminous Efficacy (rated) (Nom)	120 lm/W		
Color rendering index (CRI)	90		
Arc Length O (Nom)	9 mm		
Operating and Electrical			
Power Consumption	73.0 W		
Voltage (Nom)	96 V		
Voltage (Nom)	96 V		

Datasheet, 2023, September 4 data subject to change

# **MASTERColour CDM-T Evolution**


Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Bulb Finish	Clear			
Bulb Shape	T19 [T 19mm]			
Approval and Application				
Mercury (Hg) Content (Nom)	6.6 mg			
Energy Consumption kWh/1000 h	80 kWh			
Product Data				
Order product name	MC CDM-T Evolution 70W/930 G12			


Full product name	MC CDM-T Evolution 70W/930 G12				
Full product code	871829171376000				
Order code	928061705131				
Material Nr. (12NC)	928061705131				
Numerator - Quantity Per Pack	1				
EAN/UPC - Product/Case	8718291713760				
Numerator - Packs per outer box	12				
EAN/UPC - Case	8718291713777				


## Dimensional drawing

Product	D (max)	0	L (min)	L (max)	L	C (max)
MC CDM-T Evolution 70W/930 G12	20 mm	9 mm	55 mm	57 mm	56 mm	103 mm

## Photometric data









Light Distribution Diagram - MC CDM-T Evolution 70W/930 G12

Spectral Power Distribution Colour - MC CDM-T Evolution 70W/930 G12

# **MASTERColour CDM-T Evolution**

#### Lifetime

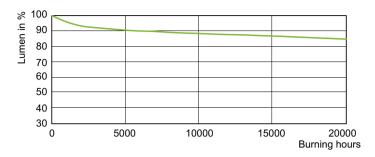

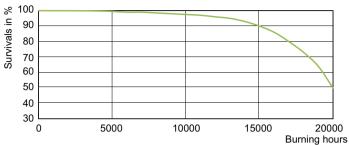

Lumen Maintenance Diagram - MC CDM-T Evolution 70W/930 G12

Life Expectancy Diagram - MC CDM-T Evolution 70W/930 G12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.