



MASTERColour CDM-TC

MASTERC CDM-TC 35W/842 G8.5 1CT/12

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- \cdot The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Arc Length O (Nom)	5 mm	
Cap-Base	G8.5 [G8.5]			
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and Electrical		
ife to 50% Failures (Nom)	12,000 hour(s)	Power Consumption	39.1 W	
		Voltage (Nom)	85 V	
Light Technical		Voltage (Nom)	85 V	
Color Code	842 [CCT of 4200K]			
Color Designation	Cool White (CW)	Controls and Dimming		
Chromaticity Coordinate X (Nom)	0.374	Dimmable	No	
Chromaticity Coordinate Y (Nom)	0.369			
Correlated Color Temperature (Nom)	4200 K	Mechanical and Housing		
uminous Efficacy (rated) (Nom)	79 lm/W	Bulb Finish	Clear	
Color rendering index (CRI)	85	Bulb Material	UV-Block Quartz	

MASTERColour CDM-TC

Bulb Shape	T14 [T 14 mm]			
Approval and Application				
Mercury (Hg) Content (Nom)	2.7 mg			
Energy Consumption kWh/1000 h	43 kWh			
Product Data				
Order product name	MASTERC CDM-TC 35W/842 G8.5 1CT/12			
Full product name	MASTERC CDM-TC 35W/842 G8.5 1CT/12			

Full product code	871869648461600		
Order code	928093805129		
Material Nr. (12NC)	928093805129		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8718696484616		
Numerator - Packs per outer box	12		
EAN/UPC - Case	8718696484623		

Dimensional drawing



Product	D (max)	D	0	L (min)	L (max)	L	C (max)
MASTERC CDM-TC	15 mm	0.5 inch	5 mm	51 mm	53 mm	52 mm	85 mm
35W/842 G8.5 1CT/12							


Photometric data



Spectral Power Distribution Colour - MASTERC CDM-TC 35W/842 G8.5 1CT/12

MASTERColour CDM-TC

Lifetime

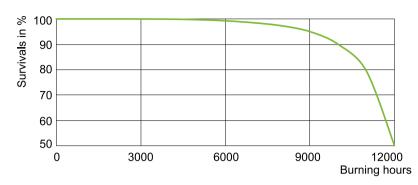

Life Expectancy Diagram - MASTERC CDM-TC 35W/842 G8.5 1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 14 - data subject to change