### - PHILIPS

# Lighting

**PHILIPS** 

## CorePro LEDtube EM/ Mains T8

#### CorePro LEDtube 600mm 9W840 C

Philips CorePro LEDtubes are the quick and easy way to replace T8 fluorescent or other LED tubes with a fast pack back time. Not only does the Core range of LEDtubes require a low initial investment, but LED energy efficiency also delivers instant savings that you can bank on over a long and reliable lifetime. Plus, with the same lamp size and light distribution as fluorescent alternatives, you'll never know the difference. There are two ways to install these LED tubes: Rewire your existing fluorescent-based luminaires so the CorePro LEDtubes work directly on the Mains. Or simply change the fluorescent starter to an LED starter that can be used with your Electromagnetic ballasts.

#### Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.
- Installation must be done according to the installation diagrams provided with the lamp or available online. Installation must be done by a certified professional.

#### **Product data**


General Information		Luminous Flux	800 lm
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Correlated Color Temperature	(Nom) 4000 K
Nominal lifetime	30,000 hour(s)	Color Consistency	<6
Switching Cycle	50,000	Color rendering index (CRI)	80
Lighting Technology	LED	LLMF At End Of Nominal Lifeti	ime (Nom) 70 %
EU RoHS compliant	Yes		
		Operating and Electrical	
Light Technical		Line Frequency	50 to 60 Hz
Color Code	840 [CCT of 4000K]	Input Frequency	50 to 60 Hz
Beam Angle (Nom)	150 degree(s)	Power Consumption	9 W

#### **CorePro LEDtube EM/Mains T8**


Starting Time (Nom)	0.5 s			
Warm-up time to 60% light	Instant full light s			
Power Factor (Fraction)	0.9			
Voltage (Nom)	220-240 V			
Temperature				
Ambient temperature range	-20 ℃ to 45 ℃			
T-Case Maximum (Nom)	55 °C			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Product Length	600 mm			
Approval and Application				
Energy Saving Product	Yes			

Suitable For Accent Lighting	No			
Approval Marks	CE marking RoHS compliance KEMA Keur			
	certificate			
Energy Consumption kWh/1000 h	9 kWh			
Product Data				
Order product name	CorePro LEDtube 600mm 9W840 C			
Full product name	CorePro LEDtube 600mm 9W840 C			
Full product code	871869648740200			
Order code	929000296819			
Material Nr. (12NC)	929000296819			
Numerator - Quantity Per Pack	1			
EAN/UPC - Product/Case	8718696487402			
Numerator - Packs per outer box	10			
EAN/UPC - Case	8718696487419			

#### **Dimensional drawing**

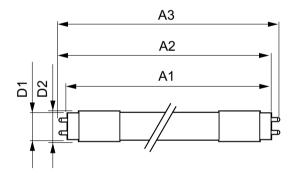


#### Photometric data



#### Light Distribution Diagram - CorePro LEDtube 600mm 9W840 C

Product	D1	D2	A1	A2	A3
CorePro LEDtube 600mm 9W840	25.68 mm	28 mm	588.5 mm	595.5 mm	602.5 mm
С					

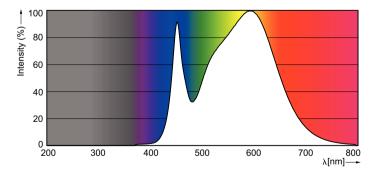

Spectral Power Distribution Colour - CorePro LEDtube 600mm 9W840 C

**CorePro LEDtube EM/Mains T8** 



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, December 6 - data subject to change