



MASTER Plastic LEDbulbs

MAS LEDbulb DT 8.5-60W E27 A60 CL

The MASTER Plastic LEDbulb range delivers a dimmable glow effect for a welcoming, warm atmosphere, making it ideal for general lighting applications in the hospitality industry. Its unique design radiates warm light in all directions, making it a true alternative to incandescent lamps. They are particularly suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. Compatible with existing fixtures with an E27 holder and designed for retrofit replacement of incandescent bulbs, MASTER Plastic LEDbulb delivers huge energy savings of up to 80% compared with traditional incandescent lamps and provides excellent quality of light. By offering a lifetime of 25,000 hours it lowers maintenance costs. They can be used together with most leading-edge dimmers, enabling further efficiencies while helping to create the desired atmosphere.

Warnings and Safety

- \cdot Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- · Not intended for use with emergency light fixtures or exit lights

Product data

General Information		
Cap-Base	E27 [E27]	
Nominal lifetime	25,000 hour(s)	
Switching Cycle	50,000	
Lighting Technology	LED	
EU RoHS compliant	Yes	

Light Technical		
Color Code	822-827 [tunable warm white]	
Luminous Flux	806 lm	
Color Designation	Warm White (WW)	
Luminous Efficacy (rated) (Nom)	94 lm/W	
Color Consistency	<6	
Color rendering index (CRI)	80	


Datasheet, 2023, November 15 data subject to change

MASTER Plastic LEDbulbs

LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	8.5 W
Lamp Current (Nom)	45 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	110 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear


Bulb Shape	A60 [A 60mm]	
Approval and Application		
Energy Saving Product	Yes	
Suitable For Accent Lighting	No	
Energy Consumption kWh/1000 h	9 kWh	
EyeComfort	Yes	
Product Data		
Order product name	MAS LEDbulb DT 8.5-60W E27 A60 CL	
Full product name	MAS LEDbulb DT 8.5-60W E27 A60 CL	
Full product code	871869648132500	
Order code	929001150932	
Material Nr. (12NC)	929001150932	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8718696481325	
Numerator - Packs per outer box	10	
EAN/UPC - Case	8718696481332	


Dimensional drawing



Product	D	С
MAS LEDbulb DT 8.5-60W E27 A60 CL	60 mm	110 mm

Photometric data



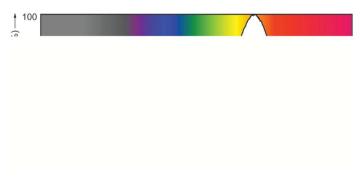

Light Distribution Diagram - MAS LEDbulb DT 8.5-60W E27 A60 CL

Spectral Power Distribution Colour - MAS LEDbulb DT 8.5-60W E27 A60 CL

MASTER Plastic LEDbulbs



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.