



HID-Constant wattage BSX for SOX

BSX 131 H96 220-240V 50Hz CW-178/78

Constant-wattage (potted) electromagnetic copper/iron ballasts for use with an external ignitor for SOX and SOX-E lamps

Product data

General Information	
Application Code	H96
Design	CW-178/74
Lamp Type	SOX-E
Number of Lamps	1 piece/unit
Operating and Electrical	
Input Voltage	220 to 240 V
Input Frequency	50 Hz
Mains Voltage Performance (AC)	-8% - +6%
Mains Voltage Safety (AC)	-10% - +10%
Power Losses (Nom)	22.5 W
Wiring	
Wire Striplength	6.0 mm
Ballast Contact Wire Cross Section	0.75-2.50 mm ²
Connector Type	Screw
System characteristics	
Capacitor	3.4µF/650V
Rated Ballast-Lamp Power	131 W
Recommended Ignitor	ignitor SX131 (913700625366)


Temperature	
T-Storage (Max)	80 °C
T-Storage (Min)	-25 °C
T-Winding (Max)	130 °C
Delta-T Normal Conditions	55 °C

Approval and Application	
Approval Marks	CE marking ENEC certificate

Product Data	
Full product code	871150091978699
Order product name	BSX 131 H96 220-240V 50Hz CW-178/78
EAN/UPC - Product	8711500919786
Order code	913647057226
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	913647057226
Net Weight (Piece)	4.200 kg

HID-Constant wattage BSX for SOX

Dimensional drawing

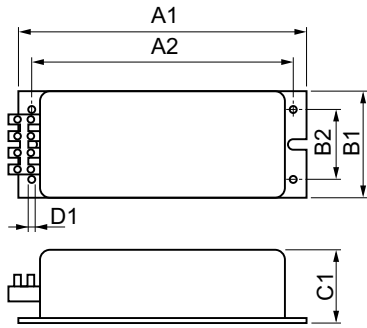

Product	D1	C1	A1	A2	B1	B2
BSX 131 H96	4.2 mm	74.0	178.0	162.0	100.0	42.0
220-240V 50Hz		mm	mm	mm	mm	mm
CW-178/78						

BSX 131 H96 220-240V 50Hz CW-178/74

