



A-Shape LED

5A19/LED/850/ND 120V 1PK/6

Philips A-shape LED lamps are the LED alternative to standard incandescents. It provides beautiful light and dependable performance you expect from LED at an affordable price.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	10,950 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Color Code	850 [CCT of 5000K]
Luminous Flux	450 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	90 lm/W
Color Consistency	ANSI
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	60 Hz
Input Frequency	60 Hz
Power Consumption	5 W
Lamp Current (Nom)	80 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s

Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	100 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	A19 [A 19mm]


Approval and Application	
Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	5 kWh

Product Data	
Order product name	5A19/LED/850/ND 120V 1PK/6
Full product name	5A19/LED/850/ND 120V 1PK/6
Order code	929001203704
Material Nr. (12NC)	929001203704
Numerator - Quantity Per Pack	1

A-Shape LED

EAN/UPC - Product/Case	046677460716
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677460711

Dimensional drawing




Product	D	C
5A19/LED/850/ND 120V 1PK/6	61 mm	107 mm


Photometric data



Spectral Power Distribution Colour - 5A19/LED/850/ND 120V 1PK/6



Light Distribution Diagram - 5A19/LED/850/ND 120V 1PK/6

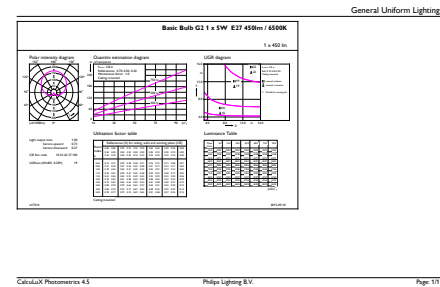

General uniform lighting - 5A19/LED/850/ND 120V 1PK/6

A-Shape LED

