



# Maxos LED Performer

## 4MX916 LED60S/830 PSD WB WH ELB1 L1800

MAXOS LED PERFORMER EM 1H6S, LED Module, system flux 6000 lm, 830 warm white, Power supply unit with DALI interface, Wide beam, White

Customers want to save energy and reduce cost compared to what they are used to with conventional lighting. At the same time, excellent lighting conditions are needed: in industrial environments, to guarantee safety and productivity; and in retail environments, to make the merchandise stand out and attract shoppers. Maxos LED Performer is an extremely flexible solution that delivers low energy consumption and excellent beam shaping at an attractive investment level.

### Product data

General Information	
Lamp family code	LED60S [LED Module, system flux 6000 lm]
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.
Service tag	Yes
Product family code	4MX916 [MAXOS LED PERFORMER EM 1H6S]
Lighting Technology	LED

Value ladder	Performance
CE mark	Yes
Warranty period	5 years
Flammability mark	-
ENEC mark	ENEC mark
Glow-wire test	Temperature 650 °C, duration 30 s
EU RoHS compliant	Yes
Light Technical	
Luminous Flux	6,000 lm
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	124 lm/W
Color rendering index (CRI)	≥80
Number of light sources	1
Beam angle of light source	120 degree(s)
Light source color	830 warm white

# Maxos LED Performer

Optic type	Wide beam
Luminaire light beam spread	90°
Unified glare rating CEN	Not applicable

## Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	21 A
Inrush time	0.280 ms
Power Consumption	48.5 W
Power Factor (Fraction)	0.9
Connection	Connection unit 5-pole
Cable	-
Number of products on MCB of 16 A type B	24

## Temperature

Ambient temperature range	-20 to +40 °C
---------------------------	---------------

## Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Control interface	DALI
Constant light output	No

## Mechanical and Housing

Housing Material	Aluminum
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover material	Polymethyl methacrylate
Fixation material	Steel
Housing Color	White
Optical cover finish	Clear
Overall length	1,800 mm
Overall width	87 mm
Overall height	82 mm
Dimensions (Height x Width x Depth)	82 x 87 x 1800 mm

## Approval and Application

Ingress protection code	IP40 [Wire-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class I

## Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.43, 0.40) SDCM <3.5
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L80


## Application Conditions

Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	Not applicable

## Product Data

Order product name	4MX916 LED60S/830 PSD WB WH ELB1 L1800
Full product name	4MX916 LED60S/830 PSD WB WH ELB1 L1800
Full product code	871869684725199
Order code	910500457258
Material Nr. (12NC)	910500457258
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696847251
Numerator - Packs per outer box	2
EAN/UPC - Case	8718696847312

## Dimensional drawing

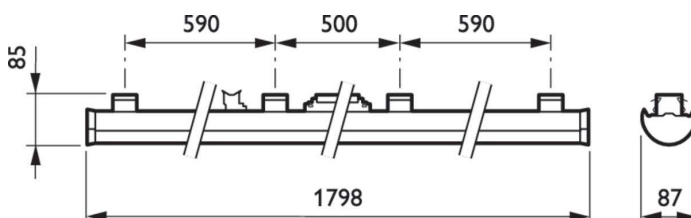

## Maxos LED Performer

