

TrueLine, recessed

RC533B LED15S/840 PSD W8L113 PCV PI5

TrueLine Recessed Line NOC - LED Module, system flux 1500 lm
 - 840 neutral white - Power supply unit with DALI interface -
 Plaster ceiling version - Push-in connector 5-pole - 1130 mm

Architects need a lighting solution that matches the interior architecture of the property they are working on. They want a light line with an elegant design and very high light levels. Specifiers need luminaires that enable them to save energy while at the same time providing the right level of light, in compliance with office lighting norms. TrueLine, recessed is able to meet both sets of requirements. TrueLine is also available in suspended and surface-mounted versions.

Product data

General Information			
Number of light sources	1 pc	Cable	-
Lamp family code	LED15S [LED Module, system flux 1500 lm]	Protection class IEC	Safety class I
Light source color	840 neutral white	Glow-wire test	Temperature 650 °C, duration 5 s
Cap-Base	- [-]	Flammability mark	For mounting on normally flammable surfaces
Light source replaceable	No	CE mark	CE mark
Number of gear units	1 unit	ENEC mark	ENEC plus mark
Gear	-	UL mark	-
Driver/power unit/transformer	Power supply unit with DALI interface	Warranty period	5 years
Driver included	Yes	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
Optic type	-	Constant light output	No
Optical cover/lens type	Polymethyl methacrylate bowl/cover		
Luminaire light beam spread	160°		
Embedded control	-		
Control interface	DALI		
Connection	Push-in connector 5-pole		

TrueLine, recessed

Number of products on MCB of 16 A type	24
B	

RoHS mark	RoHS mark
Accessory PFC	N/A
Product family code	RC533B [TrueLine Recessed Line NOC]
Unified glare rating CEN	25

Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Inrush current	19 A
Inrush time	0.28 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Geometry	Width 0.08 m, length 1.13 m
Housing configuration	Plaster ceiling version
Housing Material	Steel
Reflector material	-
Optic material	-
Optical cover/lens material	Polycarbonate
Gear tray material	Steel
Fixation material	Steel
Optical cover/lens finish	Opal
Overall length	1130 mm
Overall width	115 mm
Overall height	136 mm
Length	1130 mm
Color	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
-------------------------	--------------------------

Mech. impact protection code	IK02 [0.2 J standard]
------------------------------	------------------------

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1500 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	103 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	≥80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	14.6 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L85


Application Conditions

Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	No

Product Data



Full product code	871869906305400
Order product name	RC533B LED15S/840 PSD W8L113 PCV PI5
EAN/UPC - Product	8718699063054
Order code	910502049703
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910502049703
Net Weight (Piece)	2.700 kg

Dimensional drawing

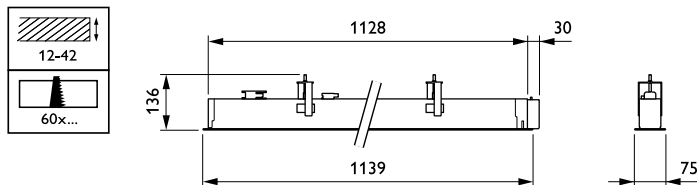

TrueLine recessed RC515B, RC530B-RC534B

Photometric data

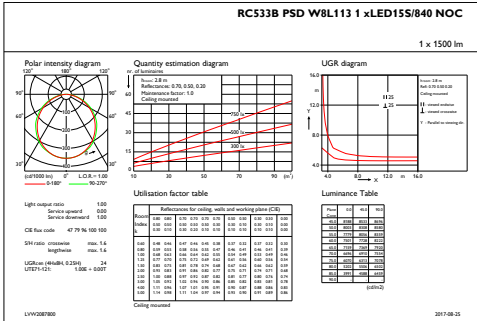

IFGU1_RC533BPSDW8L1131xLED15S840NOC

IFPC1_RC533BPSDW8L1131xLED15S840NOC

