



# CoreLine Recessed Spot

## RS141B LED6-32-/827 PSR PI6 WH

LED Module 600 lm, 32 degree(s), 827 warm white, Power supply unit regulating, Push-in connector 6-pole, White

CoreLine Recessed Spot is a recessed spot range designed to replace halogen-based luminaires. Its halogen-like look and attractive price make it easier for customers to make the switch to LED. This product provides a natural lighting effect for accent lighting applications, as well as instant energy savings and much longer lifetime – an environmentally friendly solution. With the push-in connectors, installation is fast and straightforward.

### Product data

General Information		Value ladder		Performance	
Lamp family code	LED6 [LED Module 600 lm]	CE mark	Yes		
Cap base	- [-]	Warranty period	3 years + 2 years upon registration		
Light source replaceable	No	Flammability mark	For mounting on normally flammable surfaces		
Number of gear units	Unit	ENEC mark	-		
Driver included	Yes	Glow-wire test	Temperature 850 °C, duration 5 s		
Remarks	*- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value.				
Lighting Technology	LED	EU RoHS compliant	Yes		
Light Technical					
Luminous Flux		650 lm			
Correlated Colour Temperature		2700 K			
Luminous efficacy (rated) (nom.)		65 lm/W			
Colour rendering index (CRI)		85			
Beam angle of light source		32 degree(s)			
Light source colour		827 warm white			

## CoreLine Recessed Spot

Optic type	Beam angle 32°
Optical cover type	Polycarbonate bowl/cover clear
Luminaire light beam spread	32°

### Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	7 A
Inrush time	500 ms
Power Consumption	10 W
Power Factor (Fraction)	0.9
Connection	Push-in connector 6-pole
Cable	-
Number of products on MCB of 16 A type - B	-

### Temperature

Ambient temperature range	0 to +35 °C
---------------------------	-------------

### Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit regulating
Control interface	Analogue
Constant light output	No

### Mechanical and Housing

Housing material	Aluminium
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Stainless steel
Housing Colour	White
Optical cover/lens finish	Clear
Overall height	58 mm
Overall diameter	95 mm

### Approval and Application

Ingress protection code	IP44 [Wire-protected, splash-proof]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class II

### Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.45, 0.40) SDCM <5
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance at median useful life* 50,000 h	L70


### Application Conditions

Performance ambient temperature Tq	25 °C
Maximum dim level	10%
Suitable for random switching	Yes

### Product Data

Order product name	RS141B LED6-32-/827 PSR PI6 WH
Full product name	RS141B LED6-32-/827 PSR PI6 WH
Full EOC	871869606903599
Order code	06903599
Material no. (12 NC)	910503910058
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8718696069035
Numerator – packs per outer box	18
EAN/UPC - Case	8718696069158

## Dimensional drawing

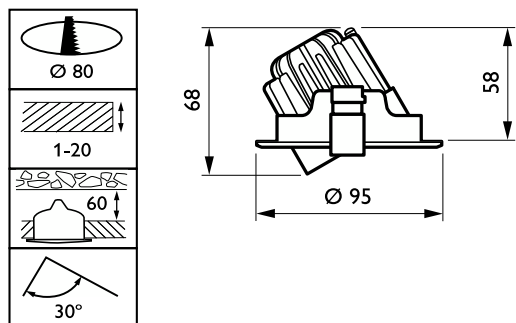

## CoreLine Recessed Spot

