



Ledinaire recessed

RC060B LED32S/840 PSU W60L60

Ledinaire recessed, 36 W, 600x600 mm, 3200 lm, 4000 K

Philips Ledinaire recessed (RC060B) is a range of popular off-the-shelf LED luminaires that come with Philips high quality levels at a competitive price. Reliable, energy efficient and affordable, Ledinaire LED recessed lights are available in a range of dimensions from 600 x 600 mm to 300 x 1200 mm. This makes Ledinaire Recessed LED lighting panels perfect for a wide range of applications from classrooms to corridors – just what you need.

Product data

General Information		Glow-wire test	
Cap-Base	- [-]	EU RoHS compliant	Temperature 650 °C, duration 30 s
Light source replaceable	No		Yes
Number of gear units	1 unit	Light Technical	
Gear	-	Luminous Flux	3,200 lm
Driver included	Yes	Correlated Color Temperature (Nom)	4000 K
Remarks	*-Per Lighting Europe guidance paper “Evaluating performance of LED based luminaires – January 2018”: statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.	Luminous Efficacy (rated) (Nom)	89 lm/W
		Color rendering index (CRI)	≥80
		Light source color	840 neutral white
		Optic type	-
		Luminaire light beam spread	108°
		Unified glare rating CEN	22
Lighting Technology		Operating and Electrical	
Lighting Technology	LED	Input Voltage	220-240 V
Value ladder	Value	Line Frequency	50 to 60 Hz
CE mark	Yes	Inrush current	5.3 A
Warranty period	2 years	Inrush time	7 ms
Flammability mark	-	Power Consumption	36 W
ENEC mark	-		

Ledinaire recessed

Power Factor (Fraction)	0.9
Connection	Push-in connector and pull relief
Cable	-
Number of products on MCB of 16 A type B	24

Temperature

Ambient temperature range	+10 to +40 °C
---------------------------	---------------

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

Mechanical and Housing

Housing Material	Steel
Reflector material	-
Optic material	-
Optical cover material	Polymethyl methacrylate
Fixation material	-
Housing Color	White
Optical cover finish	Opal
Overall length	597 mm
Overall width	597 mm
Overall height	41 mm
Dimensions (Height x Width x Depth)	41 x 597 x 597 mm

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK03 [0.3 J]

Sustainability rating	-
Protection class IEC	Safety class I

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM <5
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	7.5 %
Lumen maintenance at median useful life* 50000 h	L70


Application Conditions

Performance ambient temperature Tq	25 °C
Suitable for random switching	No

Product Data

Order product name	RC060B LED32S/840 PSU W60L60
Full product name	RC060B LED32S/840 PSU W60L60
Full product code	871869606958500
Order code	910503910201
Material Nr. (12NC)	910503910201
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696069585
Numerator - Packs per outer box	1
EAN/UPC - Case	8718696069585

Dimensional drawing

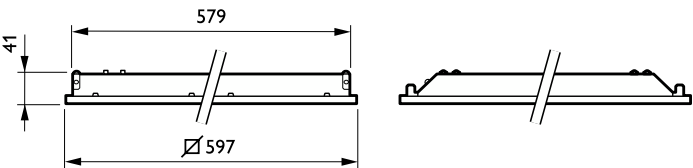

Ledinaire recessed

