



# CoreLine Trunking

## LL121X LED45S/840 1x PSD WB 7 WH

CoreLine Trunking, LED Module, system flux 4500 lm, Power supply unit with DALI interface, Wide beam

Whether for a new facility or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Trunking range of LED products can be used to replace general lighting. The process of selecting, installing and maintaining is so easy – it's a simple switch.

### Product data

General Information			
Lamp family code	LED45S [LED Module, system flux 4500 lm]	Flammability mark	For mounting on normally flammable surfaces
Light source replaceable	No	ENEC mark	ENEC mark
Number of gear units	1 unit	Glow-wire test	Temperature 650 °C, duration 5 s
Driver included	Yes	EU RoHS compliant	Yes
Feed-through wiring	Feed-through wiring 7-phase	Light Technical	
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.	Luminous Flux	4,500 lm
Service tag	Yes	Correlated Color Temperature (Nom)	4000 K
Product family code	LL121X [CoreLine Trunking]	Luminous Efficacy (rated) (Nom)	141 lm/W
Lighting Technology	LED	Color rendering index (CRI)	≥80
CE mark	Yes	Number of light sources	3
Warranty period	3 years	Beam angle of light source	120 degree(s)
		Light source color	840 neutral white
		Optic type	Wide beam
		Optical cover type	-
		Luminaire light beam spread	88° x 94°




## CoreLine Trunking

Unified glare rating CEN	Not applicable
<b>Operating and Electrical</b>	
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	22 A
Inrush time	0.275 ms
Power Consumption	32 W
Power Factor (Fraction)	0.95
Connection	Connection unit 7-pole
Cable	-
Number of products on MCB of 16 A type B	24
<b>Temperature</b>	
Ambient temperature range	-20 to +35 °C
<b>Controls and Dimming</b>	
Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Control interface	DALI
Constant light output	No
<b>Mechanical and Housing</b>	
Housing Material	Steel
Reflector material	-
Optic material	Acrylate
Optical cover material	Acrylate
Fixation material	Steel
Housing Color	White
Optical cover finish	Clear
Overall length	1,730 mm
Overall width	95 mm
Overall height	52 mm
Dimensions (Height x Width x Depth)	52 x 95 x 1730 mm

### Dimensional drawing



<b>Approval and Application</b>	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class I
<b>Initial Performance (IEC Compliant)</b>	
Luminous flux tolerance	+/-7%
Initial chromaticity	(0.38, 0.38) SDCM <3
Power consumption tolerance	+/-11%
<b>Over Time Performance (IEC Compliant)</b>	
Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* L80	50000 h
<b>Application Conditions</b>	
Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	No
<b>Product Data</b>	
Order product name	LL121X LED45S/840 1x PSD WB 7 WH
Full product name	LL121X LED45S/840 1x PSD WB 7 WH
Full product code	871829188140700
Order code	910925802903
Material Nr. (12NC)	910925802903
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291881407
Numerator - Packs per outer box	1
EAN/UPC - Case	8718291881407

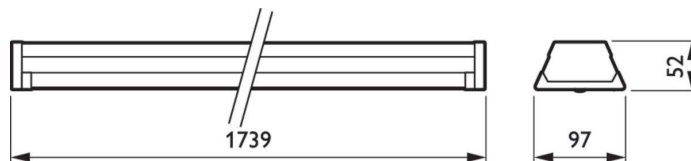



## CoreLine Trunking

### Dimensional drawing

