



Aluline 111

ALU PRO 50W G53 12V 8D 1CT/6

Low-voltage halogen burner in decorative aluminum reflector equipped with antiglare cap. Ideal solution for high-end modern luminaires, putting your objects in the spotlight. Aluminum coating prevents heat in the backlight.


Product data

General Information	
Cap-Base	G53 [G53]
Operating Position	UNIVERSAL [Any or Universal (U)]
Rated Lifetime (Hours)	3,000 hour(s)
Lighting Technology	Halogen
Light Technical	
Beam Angle (Nom)	8 degree(s)
Correlated Color Temperature (Nom)	3000 K
Color rendering index (CRI)	100
Operating and Electrical	
Power Consumption	50.0 W
Lamp Current (Nom)	4.2 A
Starting Time (Nom)	0.0 s
Voltage (Nom)	12 V
Voltage (Nom)	12 V

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	R111 [R 111mm]
Product Data	
Order product name	ALU PRO 50W G53 12V 8D 1CT/6
Full product name	ALU PRO 50W G53 12V 8D 1CT/6
Full product code	872790082013300
Order code	924065017102
Material Nr. (12NC)	924065017102
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900820133
Numerator - Packs per outer box	6
EAN/UPC - Case	8727900820140

Aluline 111

Dimensional drawing

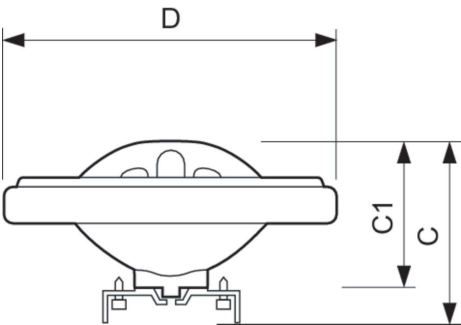

Product	D (max)	C (max)	C1 (max)
ALU PRO 50W G53 12V 8D 1CT/6	111 mm	67 mm	51 mm

Photometric data

1/ 100% / 100% / 100%

Light Distribution Diagram - ALU PRO 50W G53 12V 8D 1CT/6

