



# **MASTER PL-C 4 Pin**

## MASTER PL-C 26W/830/4P 1CT/5X10BOX

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 4 parallel narrow fluorescent tubes

### **Warnings and Safety**

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- $\cdot$  Shorter lamp life when often switching and not well pre-heated electrodes
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information				
Cap-Base	G24Q-3 [G24q-3]			
Nominal lifetime	10,000 hour(s)			
Light Technical				
Color Code	830 [CCT of 3000K]			
Luminous Flux	1,800 lm			
Color Designation	Warm White (WW)			
Correlated Color Temperature (Nom)	3000 K			
Luminous Efficacy (rated) (Nom)	67 lm/W			

Color rendering index (CRI)	82
Operating and Electrical	
Power Consumption	26.0 W
Lamp Current (Nom)	0.335 A
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Mercury (Hg) Content (Nom)	1.4 mg


Datasheet, 2023, April 15 data subject to change

## **MASTER PL-C 4 Pin**

Energy Consumption kWh/1000 h	29 kWh				
Product Data					
Order product name	MASTER PL-C 26W/830/4P 1CT/5X10BOX				
Full product name	MASTER PL-C 26W/830/4P 1CT/5X10BOX				
Full product code	871150062335500				
Order code	927907383001				


Material Nr. (12NC)	927907383001
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500623355
Numerator - Packs per outer box	50
EAN/UPC - Case	8711500716040

## Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 26W/830/4P 1CT/	27.1 mm	27.1 mm	130.5 mm	149.0 mm	163.9 mm
5X10BOX					


#### Photometric data

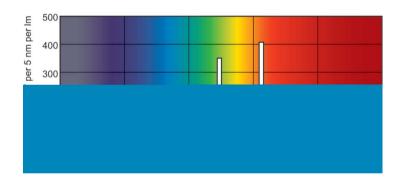

Spectral Power Distribution Colour - MASTER PL-C 26W/830/4P 1CT/5X10BOX

#### Lifetime

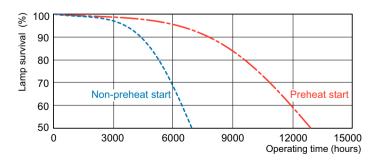

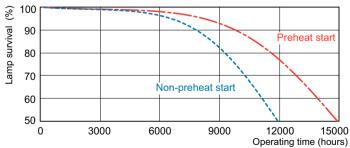

Life Expectancy Diagram - MASTER PL-C 26W/830/4P 1CT/5X10BOX

Life Expectancy Diagram - MASTER PL-C 26W/830/4P 1CT/5X10BOX

## **MASTER PL-C 4 Pin**

## Lifetime



Lumen Maintenance Diagram - MASTER PL-C 26W/830/4P 1CT/5X10BOX



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.