MASTER TL5 High Output

MASTER TL5 HO 54W/865 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Controls an
Cap-Base	G5	Dimmable
Features	na [Not Applicable]	
Flux measurement reference	Sphere	Mechanical
		Bulb Shape
Light Technical		
Color Code	865 [CCT of 6500K]	Approval a
Luminous Flux	4,200 lm	Energy Efficie
Color Designation	Cool Daylight	Mercury (Hg)
Chromaticity Coordinate X (Nom)	0.313	Energy Consu
Chromaticity Coordinate Y (Nom)	0.337	EPREL Regist
Correlated Color Temperature (Nom)	6500 K	
Luminous Efficacy (rated) (Nom)	78 lm/W	Product Da
Color rendering index (CRI)	82	Order produc
		Full product r
Operating and Electrical		Full product o
Power Consumption	54.4 W	Order code
Lamp Current (Nom)	0.455 A	Material Nr. (
		Numerator -

Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Bulb Shape	Т5		
Approval and Application			
Energy Efficiency Class	G		
Mercury (Hg) Content (Nom)	1.2 mg		
Energy Consumption kWh/1000 h	55 kWh		
EPREL Registration Number	423565		
Product Data			
Order product name	MASTER TL5 HO 54W/865 SLV/40		
Full product name	MASTER TL5 HO 54W/865 1SL/40		
Full product code	871150064391955		
Order code	64391955		
Material Nr. (12NC)	927929086555		
Numerator - Quantity Per Pack	1		








Lighting

MASTER TL5 High Output


EAN/UPC - Product/Case	8711500643919	
Numerator - Packs per outer box	40	
EAN/UPC - Case	8711500868848	

Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 54W/865	17 mm	1,149.0 mm	1,156.1 mm	1,153.7 mm	1,163.2 mm
SLV/40					

Photometric data

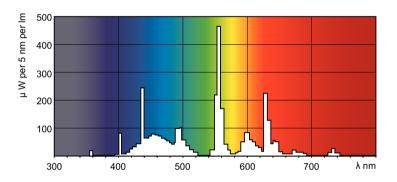


Spectral Power Distribution Colour - MASTER TL5 HO 54W/865 SLV/40

Lifetime

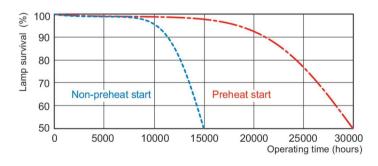

Life Expectancy Diagram - MASTER TL5 HO 54W/865 SLV/40



Lumen Maintenance Diagram - MASTER TL5 HO 54W/865 SLV/40

MASTER TL5 High Output

Lifetime

Life Expectancy Diagram - MASTER TL5 HO 54W/865 SLV/40



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 14 - data subject to change