



MASTER PL-S 2 Pin

MASTER PL-S 9W/830/2P UNP/50

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	G23 [G23]
Life to 50% Failures (Nom)	10,000 hour(s)
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux	600 lumen
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	67 lm/W
Color rendering index (CRI)	82


Operating and Electrical	
Power Consumption	8.7 W
Lamp Current (Nom)	0.170 A
Controls and Dimming	
Dimmable	No
Approval and Application	
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	11 kWh

MASTER PL-S 2 Pin

Product Data	
Full product code	871150088825965
Order product name	MASTER PL-S 9W/830/2P UNP/50
Order code	927936083017
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50


Material Nr. (12NC)	927936083017
Full product name	MASTER PL-S 9W/830/2P UNP/50
EAN/UPC - Case	8711500888266
EAN/UPC - Product/Case	8711500888259

Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-S 9W/830/2P UNP/50	28 mm	13 mm	129 mm	145 mm	167 mm

Photometric data

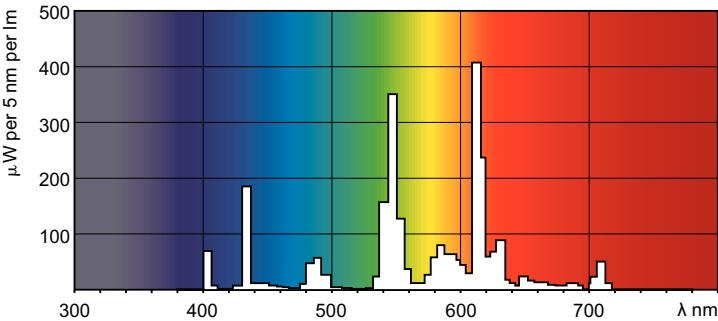


Spectral Power Distribution Colour - MASTER PL-S 9W/830/2P UNP/50

Lifetime

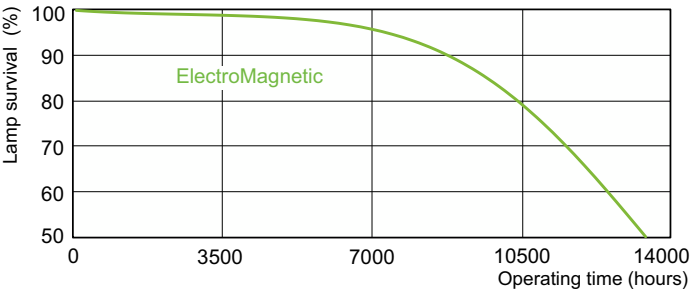

Life Expectancy Diagram - MASTER PL-S 9W/830/2P UNP/50

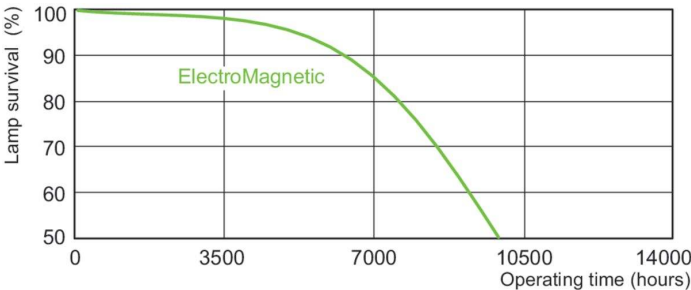

Life Expectancy Diagram - MASTER PL-S 9W/830/2P UNP/50

MASTER PL-S 2 Pin

Lifetime



Lumen Maintenance Diagram - MASTER PL-S 9W/830/2P UNP/50

