

Lighting

PHILIPS

T5 Standard

F35T5/84140PK

Philips T5 Fluorescent Lamps featuring ALTO[®] Lamp Technology offer increased energy savings and low toxicity in a slim profile.


Product data

General Information			
Cap-Base	G5		
Features	HE Alto® [High Efficiency Alto]		
Light Technical			
Color Code	841 [CCT of 4100K]		
Luminous Flux	3,650 lm		
Color Designation	Cool White (CW)		
Correlated Color Temperature (Nom)	4100 K		
Luminous Efficacy (rated) (Nom)	94 lm/W		
Color rendering index (CRI)	82		
Operating and Electrical			
Power Consumption	35.5 W		
Lamp Current (Nom)	0.175 A		
Controls and Dimming			
Dimmable	Yes		

Mechanical and Housing	
Bulb Shape	Т5
Approval and Application	
Mercury (Hg) Content (Nom)	1.4 mg
Product Data	
Order product name	F35T5/841 40PK
Full product name	F35T5/841 40PK
Order code	230953
Material Nr. (12NC)	927992784022
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677230951
Numerator - Packs per outer box	40
EAN/UPC - Case	2008410018842


T5 Standard


Dimensional drawing

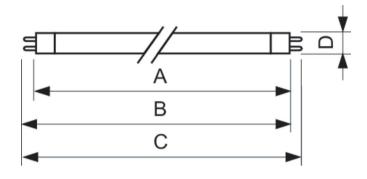

Product	D (max)	A (max)	B (max)	B (min)	C (max)
F35T5/841 40PK	17 mm	1,449.0 mm	1,456.1 mm	1,453.7 mm	1,463.2 mm

Lifetime

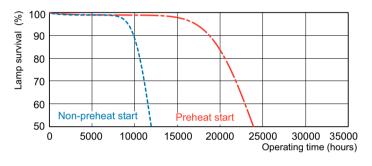



Life Expectancy Diagram - F35T5/841 40PK

(%) xnj soou 80 70 60 50 50 5000 10000 15000 20000 25000 30000 33

00 15000 20000 25000 30000 35000 Operating time (hours)

Lumen Maintenance Diagram - F35T5/841 40PK

Life Expectancy Diagram - F35T5/84140PK

T5 Standard



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 14 - data subject to change