



MASTER TL-D 90 De Luxe

MASTER TL-D 90 De Luxe 36W/930 1SL/10

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information		Controls and Dimming	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	Yes
Life to 50% Failures (Nom)	15,000 hour(s)		
Light Technical		Mechanical and Housing	
Color Code	930 [CCT of 3000K]	Bulb Shape	T8 [26 mm (T8)]
Luminous Flux	2,800 lm		
Color Designation	Warm White (WW)	Approval and Application	
Chromaticity Coordinate X (Nom)	434	Mercury (Hg) Content (Nom)	2 mg
Chromaticity Coordinate Y (Nom)	399	Energy Consumption kWh/1000 h	43 kWh
Correlated Color Temperature (Nom)	3000 K		
Luminous Efficacy (rated) (Nom)	77.8 lm/W	Product Data	
Color rendering index (CRI)	91	Order product name	MASTER TL-D 90 De Luxe 36W/930 SLV/10
Operating and Electrical		Full product name	MASTER TL-D 90 De Luxe 36W/930 1SL/10
Power Consumption	36.0 W	Full product code	871150088856325
Lamp Current (Nom)	0.440 A	Order code	88856325
		Material Nr. (12NC)	928044593081
		Numerator - Quantity Per Pack	1
		EAN/UPC - Product/Case	8711500888563
		Numerator - Packs per outer box	10

MASTER TL-D 90 De Luxe


EAN/UPC - Case	8711500888570
----------------	---------------

Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D 90 De Luxe 36W/930 SLV/10	28 mm	1,199.4 mm	1,206.5 mm	1,204.1 mm	1,213.6 mm

Photometric data

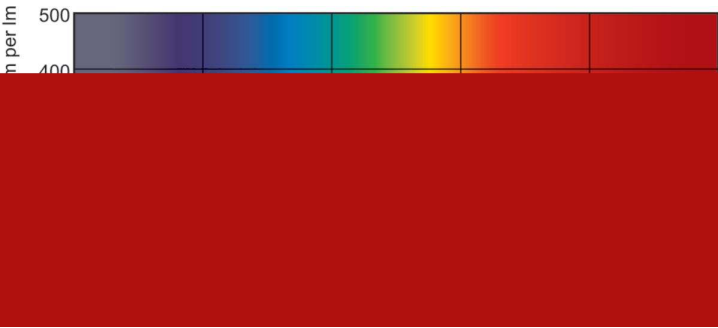


Spectral Power Distribution Colour - MASTER TL-D 90 De Luxe 36W/930 SLV/10

Lifetime

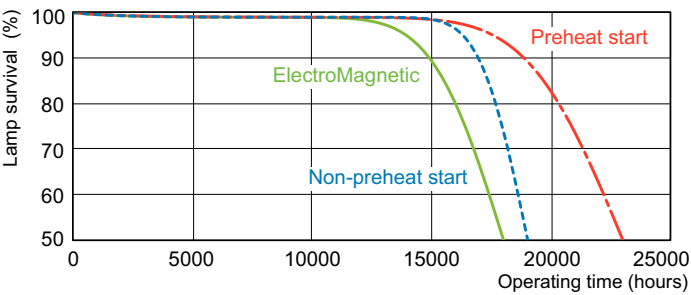


Life Expectancy Diagram - MASTER TL-D 90 De Luxe 36W/930 SLV/10

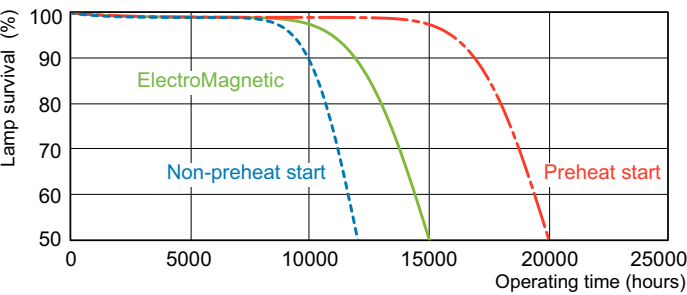

Life Expectancy Diagram - MASTER TL-D 90 De Luxe 36W/930 SLV/10

MASTER TL-D 90 De Luxe

Lifetime

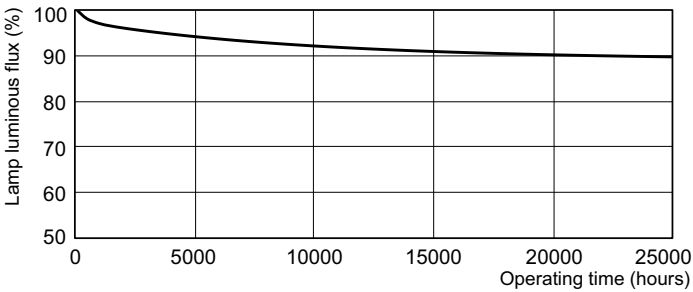

Lumen Maintenance Diagram - MASTER TL-D 90 De Luxe 36W/930 SLV/10

